A. **FLOOD DAMAGE REDUCTION SEGMENT/SYSTEM INSPECTION REPORT – Naugatuck River RB – Southend Ansonia, CT**
Date of Inspection – 4/22/2009 – Provided to Ansonia on February 3, 2010

DEPARTMENT OF THE ARMY
NEW ENGLAND DISTRICT, CORPS OF ENGINEERS
696 VIRGINIA ROAD
CONCORD, MASSACHUSETTS 01742-2751

REPLY TO
ATTENTION OF

February 3, 2010

Engineering/Planning Division
Geotechnical and Water Resources Branch

Mr. Michael Schryver
Superintendent of Public Works
City of Ansonia
North Division Street
Ansonia, Connecticut 06401

Dear Mr. Schryver:

The routine inspection of the federally constructed Naugatuck River Right Bank-Southend Ansonia & Derby/Housatonic River Left Bank Derby CT Flood Damage Reduction (FDR) system in the cities of Ansonia and Derby, Connecticut, was conducted on April 22-23, 2009. The system is divided into two segments, with the Ansonia segment running along the right bank of the Naugatuck River from the upstream end at the railroad bridge crossing to the town line at Division Street, and the Derby segment continuing from Division Street around the confluence of the Naugatuck and Housatonic rivers and up the left bank of the Housatonic river to Bridge Street. Enclosed is the detailed inspection report of the Ansonia segment for the city's records.

Please note that there is a new nationwide inspection format under the United States Army Corps of Engineers (USACE) Levee Safety Program. Uniform inspection standards have been adopted as articulated in the March 2006 Federal document entitled "Levee Owner's Manual for Non-Federal Flood Control Works". Under these standards a flood damage reduction system is defined as one or more flood damage reduction segments which collectively provide flood damage reduction to a defined area. Failure of one segment within a system constitutes failure of the entire system. A flood damage reduction segment is defined as a discrete portion of a flood damage reduction system that is operated and maintained by a single entity. A flood damage reduction segment can be made up of one or more features (levee, floodwall, pump stations, etc). The overall system rating for the Naugatuck River Right Bank-Southend Ansonia & Derby/Housatonic River Left Bank Derby CT FDR system is dependant on the ratings of each segment, and was generally derived from the inspection guide excerpted from the Levee Owners Manual. There are only three possible ratings; "acceptable", "minimally acceptable", and "unacceptable".

The system was found to be in a "minimally acceptable" condition, meaning that deficiencies were identified that would not prevent the system from performing as intended during the next flood event. Systems rated minimally acceptable are considered "Active" in Rehabilitation and Inspection Program (RIP) and eligible for Public Law (PL) 84-99 post flood

storm damage rehabilitation assistance from the USACE. However, these deficiencies do lower the overall reliability of the system.

The following deficiencies are the basis for the minimally acceptable system rating and need to be addressed over the period identified:

- There was no evidence that the toe drainage system or the interior drainage system have been inspected by camera in the past five years. The toe drainage and interior drainage systems, and all pipe penetrations that run through the levee need to be inspected by camera to determine the current state of repair. These inspections should be performed by September 1, 2010.

- Vegetation, consisting of weeds and woody vegetation is present at the north end of the segment adjacent to the railroad closure gate and should be cleared and treated with herbicides. The woody vegetation should be addressed prior to September 1, 2010. Vegetation will be an on-going maintenance issue and should be addressed for accordingly.

- Numerous animal burrows were noted along the length of the levee. These need to be excavated and backfilled within six months.

- The access cover plates to the gate well of Sluice Gate #7 are missing, posing a significant safety hazard. New cover plates should be installed prior to September 1, 2010.

- There were no records of Megger testing being performed at Division St. Pump Station within the past year. Megger testing on pump motors and critical power cables needs to be performed annually. Perform Megger testing on Division St. Pump Station within one year, and continue to perform testing annually.

- Minor rutting from patrol vehicles was noted along the levee crown. This should be monitored and repaired if the condition degrades.

If the minor noted deficiencies identified above and noted within the inspection report are not corrected within the indicated timeframe, the project will be placed in an "Inactive" status and will be ineligible for PL84-99 assistance until such time that the deficiencies have been corrected by the city and subsequently accepted by USACE.

Notwithstanding the deficiencies identified, I am pleased to report that the system should perform as intended. However, the longer the identified deficiencies go unrepaired and rectified the greater the risk to public safety. You and your staff during the inspection demonstrated a strong willingness to correct the deficiencies identified and bring the project to the original intended standards.

I extend my thanks to both yourself and the staff that maintains the project for your cooperation and presence during the inspection. If you have any questions concerning the inspection, or other matters pertaining to the Naugatuck River Right Bank-Southend Ansonia & Derby/Housatonic River Left Bank Derby CT Flood Damage Reduction (FDR) system, please call me at (978) 318-8722 or Scott Michalak, NAE District Levee Safety Program Manager, at (978) 318-8350.

Sincerely,

for H. Farrell McMillan, P.E.
Chief, Engineering/Planning Division
Levee Safety Officer

Enclosure

Copy Furnished (with Enclosure):

Mr. James Della Volpe
Mayor, City of Ansonia
253 Main Street
Ansonia, Connecticut 06401

Mr. Kevin M. Merli
Director, Mitigation Division
FEMA Region 1
99 High Street, 6th Floor
Boston, Massachusetts 02110-2320

US Army Corps of Engineers®

Flood Damage Reduction Segment / System Inspection Report

Name of Segment / System: Naug Riv RB-Southend Ansonia

Public Sponsor(s): City of Ansonia, CT

Public Sponsor Representative: Mike Schryver

Sponsor Phone: 203-410-6946

Sponsor Email: m.schryver@cityof ansonia.com

Corps of Engineers Inspector: Alex Garneau, Scott Michalak, Heather Rausch

Date of Inspection: 4/22/2009

Inspection Report Prepared By: Alex Garneau

Date Report Prepared: 1/25/2010

Internal Technical Review (for Periodic Inspections) By: NA

Date of ITR: NA

Final Approved By: Scott Michalak

Date Approved: 1/25/2010

Type of Inspection:

- ☐ **Initial Eligibility Inspection**
- ☒ **Continuing Eligibility Inspection (Routine)**
- ☐ **Continuing Eligibility Inspection (Periodic)**

Overall Segment / System Rating:

- ☐ **Acceptable**
- ☒ **Minimally Acceptable**
- ☐ **Unacceptable**

Contents of Report:

- ☒ **Instructions**
- ☐ **Initial Eligibility Inspection**
- ☒ **General Items for All Flood Control Works**
- ☒ **Levee Embankment**
- ☐ **Concrete Floodwalls**
- ☐ **Sheet Pile and Concrete I-walls**
- ☒ **Interior Drainage System**
- ☒ **Pump Stations**
- ☒ **FDR System Channels**

Note: In addition to the report contents indicated here, a plan view drawing of the system, with stationing, should be included with this report to reference locations of items rated less than acceptable. Photos of general system condition and any noted deficiencies should also be attached.

US Army Corps of Engineers®

Flood Damage Reduction Segment / System Public Sponsor Pre-Inspection Form

The following information is to be provided by the levee district sponsor prior to an inspection. This information will be used to help evaluate the organizational capability of the levee district to manage the levee segment / system maintenance program.

1. **Levee segment / system and district: (name of the segment / system and levee district)**
2. **Reporting period: (month/day/year to month/day/year)**
3. **Summary of maintenance required by last inspection report:**
4. **Summary of maintenance performed this reporting period:**
5. **Summary of maintenance planned next reporting period:**
6. **Summary of changes to segment / system since last inspection:**
7. **Problems/ issues requiring the assistance of the US Army Corps of Engineers:**

General Instructions for the Inspection of Flood Damage Reduction Segments / Systems

A. Purpose of USACE Inspections:

The primary purpose of these inspections is to prevent loss of life and catastrophic damages, preserve the value of Federal investments, and to encourage non-Federal sponsors to bear responsibility for their own protection. Inspections should assure that Flood Damage Reduction structures and facilities are continually maintained and operated as necessary to obtain the maximum benefits. Inspections are also conducted to determine eligibility for Rehabilitation Assistance under authority of PL 84-99 for Federal and non-Federal systems. (ER 1130-2-530, ER 500-1-1)

B. Types of Inspections:

The Corps conducts several types of inspections of Flood Damage Reduction systems, as outlined below:

Initial Eligibility Inspections	Continuing Eligibility Inspections	
	Routine Inspections	Periodic Inspections
IEIs are conducted to determine whether a non-Federally constructed Flood Damage Reduction system meets the minimum criteria and standards set forth by the Corps for initial inclusion into the Rehabilitation and Inspection Program.	RIs are intended to verify proper maintenance, owner preparedness, and component operation.	PIs are intended to verify proper maintenance and component operation and to evaluate operational adequacy, structural stability, and safety of the system. Periodic Inspections evaluate the system's original design criteria vs. current design criteria to determine potential performance impacts, evaluate the current conditions, and compare the design loads and design analysis used against current design standards. This is to be done to identify components and features for the sponsor that need to be monitored more closely over time or corrected as needed. (Periodic Inspections are used as the basis of risk assessments.)

C. Inspection Boundaries:

Inspections should be conducted so as to rate each Flood Damage Reduction "Segment" of the system. The overall system rating will be the lowest segment rating in the system.

Project	System	Segment
A flood damage reduction project is made up of one or more flood damage reduction systems which were under the same authorization.	A flood damage reduction system is made up of one or more flood damage reduction segments which collectively provide flood damage reduction to a defined area. Failure of one segment within a system constitutes failure of the entire system. Failure of one system does not affect another system.	A flood damage reduction segment is defined as a discrete portion of a flood damage reduction system that is operated and maintained by a single entity. A flood damage reduction segment can be made up of one or more features (levee, floodwall, pump stations, etc).

D. Land Use Definitions:

The following three definitions are intended for use in determining minimum required inspection intervals and initial requirements for inclusion into the Rehabilitation and Inspection Program. Inspections should be considered for all systems that would result in significant environmental or economic impact upon failure regardless of specific land use.

Agricultural	Rural	Urban
Protected population in the range of zero to 5 households per square mile protected	Protected population in the range of 6 to 20 households per square mile protected	Greater than 20 households per square mile, major industrial areas with significant infrastructure investment. Some protected urban areas have no permanent population but may be industrial areas with high value infrastructure with no overnight population.

I. **Reporting:**

After the inspection, the Corps is responsible for assembling an inspection report (or a summary report if it was a Periodic Inspection) including the following information:

a. All sections of the report template used during the inspection, including the cover and pre-inspection materials (Supplemental data collected, and any sections of the template that weren't used during the inspection do not need to be included with the report.)

b. Photos of the general system condition and noted deficiencies

c. A plan view drawing of the system, with stationing, to reference locations of items rated less than acceptable

d. The relative importance of the identified maintenance issues should be specified in the transmittal letter

e. If the Overall System Rating is Minimally Acceptable, the report needs to establish a timeframe for correction of serious deficiencies noted (not to exceed two years) and indicate that if these items are not corrected within the required timeframe, the system will be rated as Unacceptable and made Inactive in the Rehabilitation Inspection Program.

J. **Notification:**

Reports are to be disseminated as follows within 30 days of the inspection date.

If the Overall System Rating is Acceptable	If the Overall System Rating is Minimally Acceptable	If the Overall System Rating is Unacceptable
Reports need to be provided to the local sponsor and the county emergency management agency.	Reports need to be provided to the local sponsor, state emergency management agency, county emergency management agency, and to the FEMA region.	Reports need to be provided to the local sponsor, state emergency management agency, county emergency management agency, FEMA region, and to the Congressional delegation within 30 days of the inspection.

General Items for All Flood Damage Reduction Segments / Systems

For use during all inspections of all Flood Damage Reduction Segments / Systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Operations and Maintenance Manuals	A	A	Levee Owner's Manual, O&M Manuals, and/or manufacturer's operating instructions are present.	
		M	Sponsor manuals are lost or missing or out of date; however, sponsor will obtain manuals prior to next scheduled inspection.	
		U	Sponsor has not obtained lost or missing manuals identified during previous inspection.	
2. Emergency Supplies and Equipment (A or M only)	A	A	The sponsor maintains a stockpile of sandbags, shovels, and other flood fight supplies which will adequately supply all needs for the initial days of a flood fight. Sponsor determines required quantity of supplies after consulting with inspector.	
		M	The sponsor does not maintain an adequate supply of flood fighting materials as part of their preparedness activities.	
3. Flood Preparedness and Training (A or M only)	A	A	Sponsor has a written system-specific flood response plan and a solid understanding of how to operate, maintain, and staff the FDR system during a flood Sponsor maintains a list of emergency contact information for appropriate personnel and other emergency response agencies	
		M	The sponsor maintains a good working knowledge of flood response activities, but documentation of system-specific emergency procedures and emergency contact personnel is insufficient or out of date.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Unwanted Vegetation Growth[1]	A	A	The levee has little or no unwanted vegetation (trees, bush, or undesirable weeds), except for vegetation that is properly contained and/or situated on overbuilt sections, such that the mandatory 3-foot root-free zone is preserved around the levee profile. The levee has been recently mowed. The vegetation-free zone extends 15 feet from both the landside and riverside toes of the levee to the centerline of the tree. If the levee access easement doesn't extend to the described limits, then the vegetation-free zone must be maintained to the easement limits. Reference EM 1110-2-301 or Corps policy for regional vegetation variance.	ANC2_2009_a_0001: Trees and vegetation are growing on the slope and crown.: Vegetation needs to be cleared as per regulations. (U) ANC2_2009_a_0004: Minor vegetation and small bushes present on this segment of levee.: Clear vegetation. (M) ANC2_2009_a_0008: Good condition.: Continue to maintain. (A) ANC2_2009_a_0011: Good condition.: Continue to maintain. (A)
		M	Minimal vegetation growth (brush, weeds, or trees 2 inches in diameter or smaller) is present within the zones described above. This vegetation must be removed but does not currently threaten the operation or integrity of the levee.	
		U	Significant vegetation growth (brush, weeds, or any trees greater than 2 inches in diameter) is present within the zones described above and must to be removed to reestablish or ascertain levee integrity.	
2. Sod Cover	A	A	There is good coverage of sod over the levee.	Sod cover is acceptable.
		M	Approximately 25% of the sod cover is missing or damaged over a significant portion or over significant portions of the levee embankment. This may be the result of over-grazing or feeding on the levee, unauthorized vehicular traffic, chemical or insect problems, or burning during inappropriate seasons.	
		U	Over 50% of the sod cover is missing or damaged over a significant portion or portions of the levee embankment.	
		N/A	Surface protection is provided by other means.	
3. Encroachments	A	A	No trash, debris, unauthorized farming activity, structures, excavations, or other obstructions present within the easement area. Encroachments have been previously reviewed by the Corps, and it was determined that they do not diminish proper functioning of the levee.	Levee is generally clear of encroachments. (A)
		M	Trash, debris, unauthorized farming activity, structures, excavations, or other obstructions present, or inappropriate activities noted that should be corrected but will not inhibit operations and maintenance or emergency operations. Encroachments have not been reviewed by the Corps.	
		U	Unauthorized encroachments or inappropriate activities noted are likely to inhibit operations and maintenance, emergency operations, or negatively impact the integrity of the levee.	
4. Closure Structures (Stop Log, Earthen Closures, Gates, or Sandbag	A	A	Closure structure in good repair. Placing equipment, stoplogs, and other materials are readily available at all times. Components are clearly marked and installation instructions/ procedures readily available. Trial erections have been accomplished in accordance with the O&M Manual.	ANC2_2009_a_0002: Railroad Gate #4. Closure structure is in good condition.: Continue to maintain. (A)

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	Cracks exceed 6 inches in depth. Longitudinal cracks are longer than the height of the levee and/or exhibit vertical movement along the crack. Transverse cracks extend through the entire levee width.	
10. Animal Control	M	A	Continuous animal burrow control program in place that includes the elimination of active burrowing and the filling in of existing burrows.	ANC2_2009_a_0006: Animal burrow found on the slope Excavate and backfill burrow. (M) ANC2_2009_a_0016: Numerous animal burrows noted along this segment of the levee.: Burrows need to be excavated and backfilled (M) Levee should be inspected monthly for signs of animal activity.
		M	The existing animal burrow control program needs to be improved. Several burrows are present which may lead to seepage or slope stability problems, and they require immediate attention.	
		U	Animal burrow control program is not effective or is nonexistent. Significant maintenance is required to fill existing burrows, and the levee will not provide reliable flood protection until this maintenance is complete.	
11. Culverts/ Discharge Pipes[3] (This item includes both concrete and corrugated metal pipes.)	U	A	There are no breaks, holes, cracks in the discharge pipes/ culverts that would result in significant water leakage. The pipe shape is still essentially circular. All joints appear to be closed and the soil tight. Corrugated metal pipes, if present, are in good condition with 100% of the original coating still in place (either asphalt or galvanizing) or have been relined with appropriate material, which is still in good condition. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	Pipes have not been visually inspected within the past five years, and no records were available detailing pipe conditions.
		M	There are a small number of corrosion pinholes or cracks that could leak water and need to be repaired, but the entire length of pipe is still structurally sound and is not in danger of collapsing. Pipe shape may be ovalized in some locations but does not appear to be approaching a curvature reversal. A limited number of joints may have opened and soil loss may be beginning. Any open joints should be repaired prior to the next inspection. Corrugated metal pipes, if present, may be showing corrosion and pinholes but there are no areas with total section loss. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	
		U	Culvert has deterioration and/or has significant leakage, it is in danger of collapsing or as already begun to collapse. Corrugated metal pipes have suffered 100% section loss in the invert. HOWEVER: Even if pipes appear to be in good condition, as judged by an external visual inspection, an Unacceptable Rating will be assigned if the condition of pipes has not been verified using television camera video taping or visual inspection methods within the past five years, and reports for all pipes are not available for review by the inspector.	
		N/A	There are no discharge pipes/ culverts	
12. Riprap Revetments &	A	A	No riprap displacement or stone degradation that could pose an immediate threat to the integrity of channel bank. Riprap intact with no woody vegetation present.	ANC2_2009_a_0019: Riprap slope is in good condition : Continue to maintain. (A)

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

[1] If there is significant growth on the levee that inhibits the inspection of animal burrows or other items, the inspection should be ended until this item is corrected.
[2] Detailed survey elevations are normally required during Periodic Inspections, and whenever there are obvious visual settlements.
[3] The decision on whether or not USACE inspectors should enter a pipe to perform a detailed inspection must be made at the USACE District level. This decision should be made in conjunction with the District Safety Office, as pipes may be considered confined spaces. This decision should consider the age of the pipe, the diameter of the pipe, the apparent condition of the pipe, and the length of the pipe. If a pipe is entered for the purposes of inspection, the inspector should record observations with a video camera in order that the condition of the entire pipe, including all joints, can later be assessed. Additionally, the video record provides a baseline to which future inspections can be compared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: ANC2_2009_a_0001 **Name:** Vegetation along levee slope and toe **Caption:** Another view of vegetation on the river side of the slope.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: ANC2_2009_a_0004 **Name:** View of the slope and channel looking downstream **Caption:** View looking downstream of the riverside slope. Riprap is in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction


Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: ANC2_2009_a_0006 **Name:** Animal Burrow in slope **Caption:** Typical burrow noted along this segment of levee.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

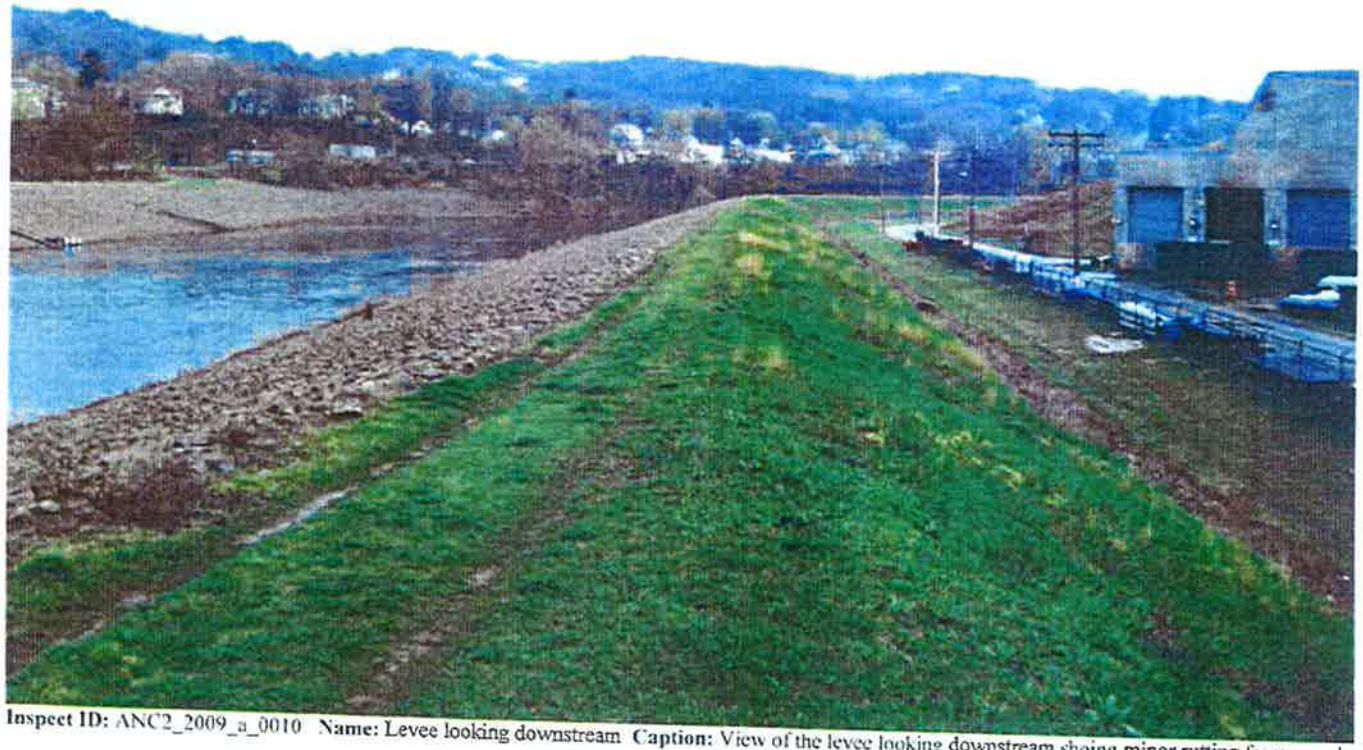

Inspect ID: ANC2_2009_a_0010 **Name:** Levee looking downstream **Caption:** View of the levee looking downstream shoing minor rutting from patrol vehicles.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: ANC2_2009_a_0016 **Name:** Burrows on protected side slope **Caption:** Typical animal burrows found along this segment of the levee.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Vegetation and Obstructions	A	A	No obstructions, vegetation, debris, or sediment accumulation noted within interior drainage channels or blocking the culverts, inlets, or discharge areas. Concrete joints and weep holes are free of grass and weeds.	
		M	Obstructions, vegetation, debris, or sediment are minor and have not impaired channel flow capacity or blocked more than 10% of any culvert openings, but should be removed. A limited volume of grass and weeds may be present in concrete channel joints and weep holes.	
		U	Obstructions, vegetation, debris, or sediment have impaired the channel flow capacity or blocked more than 10% of a culvert opening. Sediment and debris removal required to re-establish flow capacity.	
2. Encroachments	A	A	No trash, debris, unauthorized structures, excavations, or other obstructions present within the easement area. Encroachments have been previously reviewed by the Corps, and it was determined that they do not diminish proper functioning of the interior drainage system	
		M	Trash, debris, unauthorized structures, excavations, or other obstructions present, or inappropriate activities noted that should be corrected but will not inhibit operations and maintenance or emergency operations. Encroachments have not been reviewed by the Corps.	
		U	Unauthorized encroachments or inappropriate activities noted are likely to inhibit operations and maintenance, emergency operations, or negatively impact the integrity of this component of the interior drainage system.	
3. Ponding Areas	NA	A	No trash, debris, structures, or other obstructions present within the ponding areas. Sediment deposits do not exceed 10% of capacity.	
		M	Trash, debris, excavations, structures, or other obstructions present, or inappropriate activities that will not inhibit operations and maintenance. Sediment deposits do not exceed 30% of capacity.	
		U	Trash, debris, excavations, structures, or other obstructions, or other encroachments or activities noted that will inhibit operations, maintenance, or emergency work. Sediment deposits exceeds 30% of capacity.	
		N/A	There are no ponding areas associated with the interior drainage system	
4. Fencing and Gates[1]	A	A	Fencing is in good condition and provides protection against falling or unauthorized access Gates open and close freely, locks are in place, and there is little corrosion on metal parts	
		M	Fencing or gates are damaged or corroded but appear to be maintainable. Locks may be missing or damaged.	
		U	Fencing and gates are damaged or corroded to the point that replacement is required, or potentially dangerous features are not secured.	
		N/A	There are no features noted that require safety fencing.	
5. Concrete Surfaces (Such as gate	A	A	Negligible spalling, scaling or cracking. If the concrete surface is weathered or holds moisture, it is still satisfactory but should be seal coated to prevent freeze/ thaw damage.	ANC2_2009_a_0009 Sluice Gate Structure #8 Tower and bridge are in good condition.: Continue to maintain. (A)

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	The joint material is severely deteriorated or the concrete adjacent to the monolith joints has spalled and cracked, damaging the waterstop; in either case damage has occurred to the point where it is apparent that the joint is no longer watertight and will not provide the intended level of protection during a flood.	
		N/A	There are no monolith joints in the interior drainage system	
9. Culverts/ Discharge Pipes[4]	U	A	There are no breaks, holes, cracks in the discharge pipes/ culverts that would result in significant water leakage. The pipe shape is still essentially circular. All joints appear to be closed and the soil tight. Corrugated metal pipes, if present, are in good condition with 100% of the original coating still in place (either asphalt or galvanizing) or have been relined with appropriate material, which is still in good condition. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	Pipes need to be inspected by camera. (U) Pipes have not been visually inspected within the past five years, and no records were available detailing pipe conditions.
		M	There are a small number of corrosion pinholes or cracks that could leak water and need to be repaired, but the entire length of pipe is still structurally sound and is not in danger of collapsing. Pipe shape may be ovalized in some locations but does not appear to be approaching a curvature reversal. A limited number of joints may have opened and soil loss may be beginning. Any open joints should be repaired prior to the next inspection. Corrugated metal pipes, if present, may be showing corrosion and pinholes but there are no areas with total section loss. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	
		U	Culvert has deterioration and/or has significant leakage; it is in danger of collapsing or as already begun to collapse. Corrugated metal pipes have suffered 100% section loss in the invert. HOWEVER: Even if pipes appear to be in good condition, as judged by an external visual inspection, an Unacceptable Rating will be assigned if the condition of pipes has not been verified using television camera video taping or visual inspection methods within the past five years, and reports for all pipes are not available for review by the inspector.	
		N/A	There are no discharge pipes/ culverts.	
10. Sluice / Slide Gates[5]	M	A	Gates open and close freely to a tight seal or minor leakage. Gate operators are in good working condition and are properly maintained. Sill is free of sediment and other obstructions. Gates and lifters have been maintained and are free of corrosion. Documentation provided during the inspection	ANC2_2009_a_0007. Sluice Gate Structure #7. Operators in good condition. Cover plates to gate well are missing, and sheet steel secured by rocks put in place. This arrangement is not very safe : Replace missing cover plates (M)
		M	Gates and/or operators have been damaged or have minor corrosion, and open and close with resistance or binding. Leakage quantity is controllable, but maintenance is required. Sill is free of sediment and other obstructions.	
		U	Gates do not open or close and/or operators do not function. Gate, stem, lifter and/or guides may be damaged or have major corrosion.	
		N/A	There are no sluice/ slide gates.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		M	Minor riprap displacement or stone degradation that could pose an immediate threat to the integrity of the channel bank. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide	
		U	Significant riprap displacement, exposure of bedding, or stone degradation observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Rock protection is hidden by dense brush, trees, or grasses	
		N/A	There are no such revetments protecting this feature of the segment / system	

[1] Proper operation of this item must be demonstrated during the inspection

[2] The sponsor should be monitoring any observed movement to verify whether the movement is active or inactive.

[3] Inspectors must have as-built drawings available during the inspection so that the lateral distance to the heel and toe of the floodwalls can be determined in the field.

[4] The decision on whether or not USACE inspectors should enter a pipe to perform a detailed inspection must be made at the USACE District level. This decision should be made in conjunction with the District Safety Office, as pipes may be considered confined spaces. This decision should consider the age of the pipe, the diameter of the pipe, the apparent condition of the pipe, and the length of the pipe. If a pipe is entered for the purposes of inspection, the inspector should record observations with a video camera in order that the condition of the entire pipe, including all joints, can later be assessed. Additionally, the video record provides a baseline to which future inspections can be compared.

[5] Proper operation of the gates (full open and closed) must be demonstrated during the inspection if no documentation is available. Be aware of both manual and electrical operators.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: ANC2_2009_a_0009 **Name:** Sluice Gate #8 **Caption:** Sluice Gate Structure #8. Gate structure is in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1 Pump Stations Operating, Maintenance, Training, & Inspection Records	A	A	Operation, maintenance and inspection records are present at the pump station and are being used and updated, and personnel have been trained in pump station operations. Names and last training date shown in the record book	ANC2_2009_a_0021: Division St. Pump Station Station is in good condition. Pumps are well maintained : Continue to maintain. (A)
		M	Operation, maintenance and inspection records are present but not adequately used and updated.	
		U	No operation, maintenance and inspection records are present, or refresher training for personnel has not been conducted.	
2 Pump Station Operations and Maintenance Equipment Manuals	A	A	Operation and Maintenance Equipment Manuals and/or posted operating instructions are present and updated as required, and adequately cover all pertinent pump station features. O&M manuals include points of contact for manufacturers and suppliers of major equipment used in the facility.	
		M	Operation and Maintenance Equipment Manuals and/or posted operating instructions are present and adequately cover all pertinent pump station features. However, they are incomplete and the necessary updates have not been made.	
		U	Operation and Maintenance Equipment Manuals are not available.	
3 Safety Compliance	M	A	Safety compliance inspection reports by applicable local, state, or federal agencies available for review.	
		M	No safety compliance inspection reports are available for review	
4 Communications (A or M only)	A	A	A telephone, cellular phone, two-way radio, or similar device is available to pump station operator and maintenance personnel	Cell phones are used
		M	A telephone, cellular phone, two-way radio, or similar device is not available to pump station operator and maintenance personnel.	
5. Plant Building	A	A	The building is in good structural condition with no major foundation settlement problems. The roof is not leaking, intake & exhaust louvers are clear of debris, fans are operational, etc	
		M	There are minor structural defects, minimal foundation settlement, leaks, or other conditions noted that need repair Defects do not threaten the structural integrity or stability of the building, and will not impact pumping operations.	
		U	The structural integrity or stability of the building is threatened, or there is damage to the building that threatens safety of the operator or impacts pumping operations.	
6 Fencing and Gates[1]	A	A	Fencing is in good condition and provides protection against falling or unauthorized access Gates open and close freely, locks are in place, and there is little corrosion on metal parts	
		M	Fencing or gates are damaged or corroded but appear to be maintainable. Locks may be missing or damaged.	
		U	Fencing and gates are damaged or corroded to the point that replacement is required, or potentially dangerous features are not secured.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	Trash racks are missing or damaged to the extent that they are no longer functional and must be replaced. (For example, more than 10% of the sectional area may be lost.)	
		N/A	There are no trash racks, or they are covered in the pump stations section of the report.	
12. Fuel System for Pump Engines	A	A	Fuel system is operational, day tank present and operational, fuel fresh and rotated regularly.	
		M	Fuel system is operational and of adequate capacity, but day tank is missing or fuel is not fresh and rotated regularly.	
		U	Fuel system not functional.	
		N/A	No fuel system.	
13. Power Source	A	A	The normal power source and backup generators, if installed, are operational, properly exercised and well maintained. Surge protection, grounding, lightning protection, transformers, and automatic/manual transfer of main power to backup system is working.	
		M	Normal power source and backup units, if applicable, are operational with minor discrepancies or maintenance, inspection and exercising record is present but not up to date. Preventative maintenance or repairs are required.	
		U	Normal power source or generators are not operational and must be repaired; or generator, if required, is not on site.	
14. Electrical Systems[2]	A	A	Operational and maintained free of damage, corrosion, and debris. Preventative maintenance and system testing is being performed periodically.	
		M	Operational with minor discrepancies. Preventative maintenance or repairs are required, but the components are expected to function adequately during the next flood event.	
		U	Components of the electrical system will not function adequately during the next flood event and must be replaced.	
15. Megger Testing on Pump Motors and Critical Power Cables	U	A	Results of megger tests on pump motors or critical power cables show that the insulation meets manufacturer's or industry standards. Tested within the last year.	Megger testing needs to be performed annually at all pump stations.
		M	Megger testing not conducted within the past year. If megger tests on pump motors indicate that insulation resistance is below the manufacturer's or industry standard, but the resistance can be corrected with proper application of heat, this is minimally acceptable. (The application of heat does not relate to critical power cables.)	
		U	Megger tests not conducted within past two years, or tests indicate that insulation resistance is low enough that the equipment will not be able to meet design standards of operation; or evidence of arcing or shorting is detected visually.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		M	Cranes have not been inspected or operationally tested within the past year, or there are visible signs of corrosion, oil leakage, etc, requiring maintenance.	
		U	Cranes are not operational, and this may prevent the pump station from functioning as required No documentation available on cranes.	
		N/A	There are no cranes	
21 Other Metallic Items (Equipment, Ladders, Platform Anchors, etc)	A	A	All metal parts are protected from corrosion damage and show no rust, damage, or deterioration that would cause a safety concern.	
		M	Corrosion seen on metallic parts appears to be maintainable	
		U	Metallic parts are severely corroded and require replacement to prevent failure, equipment damage, or safety issues	
		N/A	There are no other significant metallic items	

[1] Proper operation of this item must be demonstrated during the inspection.
[2] Check motor control center, circuit breakers, pilot lights, volt meters, ammeters, sump level indicator, gate position indicators, remote operating systems, including SCADA and telemetry systems. Also, check interior and exterior lighting; especially lighting near trash rack screens, ladders, walkways, etc.
[3] Proper operation of the gates (full open and closed) must be demonstrated during the inspection if no documentation is available. Be aware of both manual and electrical operators.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Flood Damage Reduction Channels

For use during Initial and Continuing Eligibility Inspections of flood damage reduction channels

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Vegetation and Obstructions	A	A	No obstructions, vegetation, debris, or sediment accumulation within the channel Concrete channel joints and weep holes are free of grass and weeds.	
		M	Obstructions (including log jams), vegetation, debris, or sediment are minor and have not impaired channel flow capacity, but should be removed. Sediment shoals have not developed to the extent that they can support vegetation other than non-aquatic grasses. A limited volume of grass and weeds may be present in concrete channel joints and weep holes.	
		U	Obstructions (including log jams), vegetation, debris or sediment have impaired the channel flow capacity. Sediment shoals are well established and support woody and/or brushy vegetation. Sediment and debris removal required to re-establish flow capacity.	
2 Shoaling[1] (sediment deposition)	M	A	No shoaling or minor, non-vegetated shoaling is present.	ANC2_2009_a_0005: Two large islands are present in this segment of the channel Sediment and debris is accumulating along the upstream sides, modifying the flow pattern : Continue to monitor channel (M) ANC2_2009_a_0017: Shoaling noted on the far bank at this location. Monitor sediment build up and dredge if blockage begins to impede channel flow. (M)
		M	More widespread vegetated and non-vegetated shoaling is present Non-aquatic grasses are present on shoal No trees or brush is present on shoal, and channel flow is not significantly reduced. Sediment and debris removal recommended.	
		U	Shoaling is well established, stabilized by saplings, brush, or other vegetation. Shoals are diverting flow to channel walls. Channel flow capacity is reduced and maintenance is required.	
3. Encroachments	A	A	No trash, debris, unauthorized structures, excavations, or other obstructions present within the easement area Encroachments have been previously reviewed by the Corps, and it was determined that they do not diminish proper functioning of the channel.	
		M	Trash, debris, unauthorized structures, excavations, or other obstructions present, or inappropriate activities noted that should be corrected but will not inhibit operations and maintenance or emergency operations. Encroachments have not been reviewed by the Corps	
		U	Unauthorized encroachments or inappropriate activities noted are likely to inhibit operations and maintenance, emergency operations, or negatively impact the integrity of the channel.	
4. Erosion	A	A	No head cutting or horizontal deviation observed.	
		M	Head cutting and horizontal deviation evident, but is less than 1 foot from the designed grade or cross section	
		U	Head cutting and horizontal deviation of more than 1 foot from the designed grade or cross section. Corrective actions required to stop or slow erosion.	
5. Concrete Surfaces	NA	A	Negligible spalling, scaling or cracking. If the concrete surface is weathered or holds moisture, it is still satisfactory but should be seal coated to prevent freeze/ thaw damage	
		M	Spalling, scaling, and open cracking present, but the immediate integrity or performance of the structure is not threatened. Reinforcing steel may be exposed. Repairs/ sealing is necessary to prevent additional damage during periods of thawing and freezing.	


Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Flood Damage Reduction Channels

For use during Initial and Continuing Eligibility Inspections of flood damage reduction channels

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		M	The joint material has appreciable deterioration to the point where joint filler material and/or waterstop is visible in some locations. This needs to be repaired or replaced to prevent spalling and cracking during freeze/ thaw cycles, and to ensure water tightness of the joint.	
		U	The joint material is severely deteriorated or the concrete adjacent to the monolith joints has spalled and cracked, damaging the waterstop; in either case damage has occurred to the point where it is apparent that the joint is no longer watertight and will not provide the intended level of protection during a flood.	
		N/A	There are no concrete items in the channel	
9 Flap Gates/ Flap Valves/ Pinch Valves[4]	NA	A	Gates/ valves open and close easily with minimal leakage, have no corrosion damage, and have been exercised and lubricated as required.	
		M	Gates/ valves will not fully open or close because of obstructions that can be easily removed, or have minor corrosion damage that requires maintenance.	
		U	Gates/ valves are missing, have been damaged, or have deteriorated to the point that they need to be replaced.	
		N/A	There are no flap gates	
10 Riprap Revetments & Banks	A	A	No riprap displacement or stone degradation that could pose an immediate threat to the integrity of channel bank. Riprap intact with no woody vegetation present.	ANC2_2009_a_0003: Placed stone riprap is in good condition : Continue to maintain. (A) ANC2_2009_a_0012: Good condition : Continue to maintain (A)
		M	Minor riprap displacement or stone degradation that could pose an immediate threat to the integrity of the channel bank. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide.	
		U	Significant riprap displacement, exposure of bedding, or stone degradation observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Rock protection is hidden by dense brush, trees, or grasses.	
		N/A	There is no riprap protecting this feature of the segment / system, or riprap is discussed in another section.	
11 Revetments other than Riprap	NA	A	Existing revetment protection is properly maintained, undamaged, and clearly visible	
		M	Minor revetment displacement or deterioration that does not pose an immediate threat to the integrity of the levee. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide	
		U	Significant revetment displacement, deterioration, or exposure of bedding observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Revetment protection is hidden by dense brush and trees.	
		N/A	There are no such revetments protecting this feature of the segment / system	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

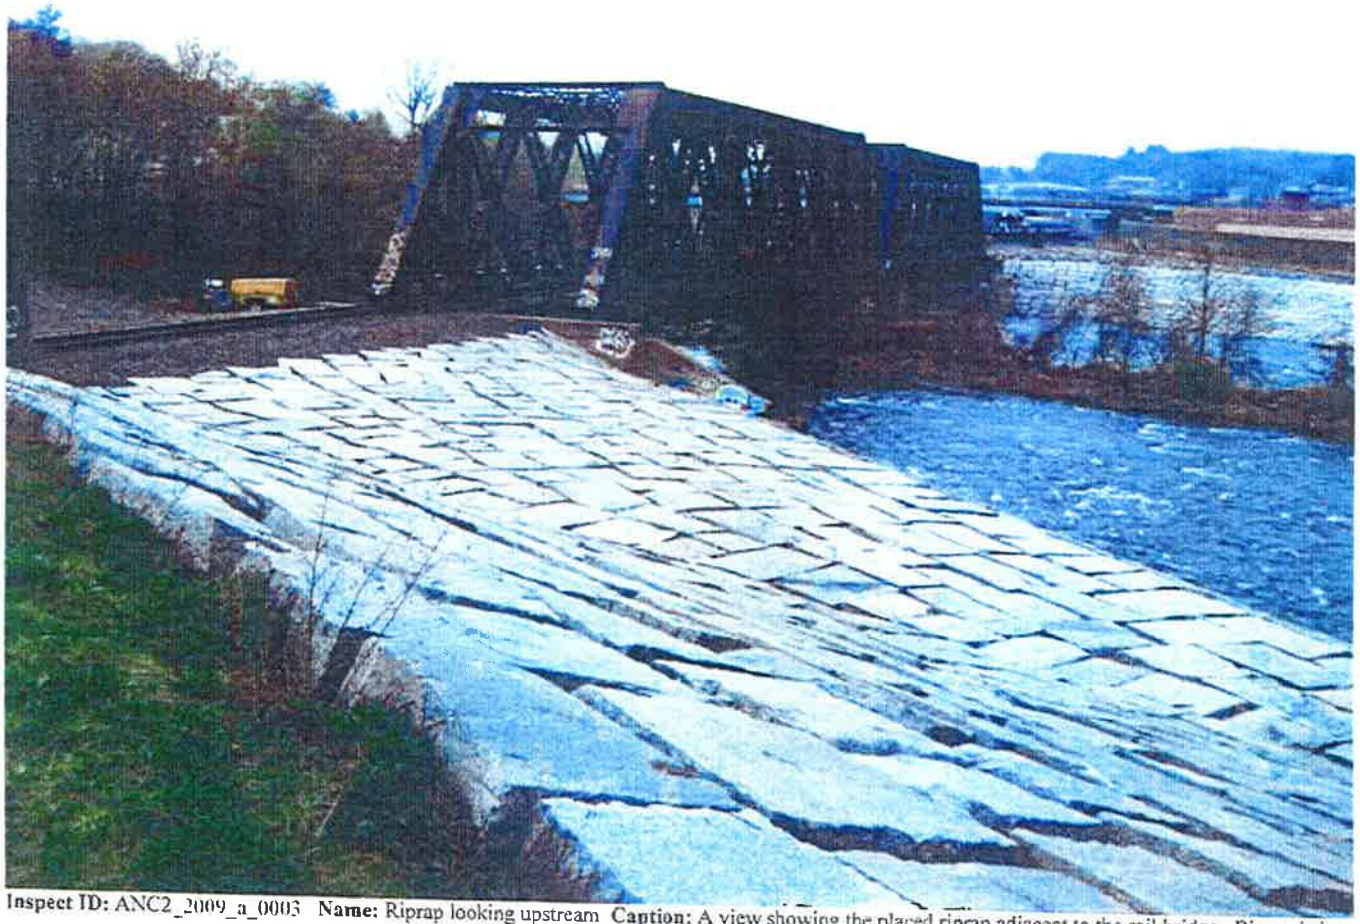

Inspect ID: ANC2_2009_a_0003 **Name:** Riprap looking upstream **Caption:** A view showing the placed riprap adjacent to the rail bridge. Riprap is in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: ANC2_2009_a_0012 **Name:** View of Riverside looking downstream **Caption:** View showing the riverside riprap. Riprap is in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

B. FLOOD DAMAGE REDUCTION SEGMENT/SYSTEM INSPECTION REPORT – Naugatuck River RB – Southend Derby/Housatonic River LB Derby, CT Date of Inspection – 4/23/2009 – Provided to Derby on February 3, 2010

DEPARTMENT OF THE ARMY
NEW ENGLAND DISTRICT, CORPS OF ENGINEERS
696 VIRGINIA ROAD
CONCORD, MASSACHUSETTS 01742-2751

REPLY TO:
ATTENTION OF:

February 3, 2010

Engineering/Planning Division
Geotechnical and Water Resources Branch

Mr. Ron Culmo
Director of Public Works
City of Derby
Coon Hollow Road
Derby, Connecticut 06418

Dear Mr. Culmo:

The routine inspection of the federally constructed Naugatuck River Right Bank-Southend Ansonia & Derby/Housatonic River Left Bank Derby CT Flood Damage Reduction (FDR) system in the cities of Ansonia and Derby, Connecticut, was conducted on April 22-23, 2009. The system is divided into two segments, with the Ansonia segment running along the right bank of the Naugatuck River from the upstream end at the railroad bridge crossing to the town line at Division Street, and the Derby segment continuing from Division Street around the confluence of the Naugatuck and Housatonic rivers and up the left bank of the Housatonic river to Bridge Street. Enclosed is the detailed inspection report of the Derby segment for the city's records.

Please note that there is a new nationwide inspection format under the United States Army Corps of Engineers (USACE) Levee Safety Program. Uniform inspection standards have been adopted as articulated in the March 2006 Federal document entitled "Levee Owner's Manual for Non-Federal Flood Control Works". Under these standards a flood damage reduction system is defined as one or more flood damage reduction segments which collectively provide flood damage reduction to a defined area. Failure of one segment within a system constitutes failure of the entire system. A flood damage reduction segment is defined as a discrete portion of a flood damage reduction system that is operated and maintained by a single entity. A flood damage reduction segment can be made up of one or more features (levee, floodwall, pump stations, etc). The overall system rating for the Naugatuck River Right Bank-Southend Ansonia & Derby/Housatonic River Left Bank Derby CT FDR system is dependant on the ratings of each segment, and was generally derived from the inspection guide excerpted from the Levee Owners Manual. There are only three possible ratings; "acceptable", "minimally acceptable", and "unacceptable".

The system was found to be in a "minimally acceptable" condition, meaning that deficiencies were identified that would not prevent the system from performing as intended during the next flood event. Systems rated minimally acceptable are considered "Active" in Rehabilitation and Inspection Program (RIP) and eligible for Public Law (PL) 84-99 post flood

storm damage rehabilitation assistance from the USACE. However, these deficiencies do lower the overall reliability of the system.

The following deficiencies are the basis for the minimally acceptable system rating and need to be addressed over the period identified:

- There was no evidence that the toe drainage system or the interior drainage system have been inspected by camera in the past five years. The toe drainage and interior drainage systems, and all pipe penetrations that run through the levee need to be inspected by camera to determine the current state of repair. These inspections should be performed by September 1, 2010.

- Sections of the toe drain riprap are covered with minor vegetation and sediment. Vegetation and sediment should be cleared by September 1, 2010.

- Relief wells are in poor condition. The presence of standing water around the relief wells indicates that they may be nonfunctional. The wells need to be inspected and tested to determine if they are still functional. This testing should be performed prior to September 1, 2010.

- Vegetation is a problem in numerous locations. All trees and shrubs that are planted on or within 15 feet of the levee toe need to be removed. There is significant vegetation growth around Railroad Gates 2A and 2B. The woody vegetation should be addressed prior to September 1, 2010. Vegetation will be an on-going maintenance issue and should be addressed for accordingly.

- Heavy vegetation is also present along the riverside slope of the Route 8 highway embankment. Vegetation consists of both weeds and woody vegetation. A review of the as built drawings shows that the embankment has a layer of compacted impervious fill which could be compromised by vegetation growth. Vegetation needs to be cleared to a minimum of 15 feet from the slope. Trees need to be removed, with the roots excavated, backfilled and compacted with similar material. The woody vegetation should be addressed prior to September 1, 2010. Vegetation will be an on-going maintenance issue and should be addressed for accordingly.

- Numerous animal burrows were noted along the length of the levee. These need to be excavated and backfilled prior to September 1, 2010. An active animal control plan should be developed to address these issues.

- The intake structure for Sluice Gate 7 is clogged with vegetation and sediment, leading to excess water ponding behind the levee. The intake needs to be cleared of vegetation and sediment by September 1, 2010.

- Railroad Gate 3 had moderate to significant concrete deterioration. Significant spalling was noted along the gate sill. The condition should be monitored and repairs made if the condition worsens.

- There were no records of Megger testing being performed at Derby Pump Station within the past year. Megger testing on pump motors and critical power cables needs to be performed annually. Perform Megger testing on Derby Pump Station within one year, and continue to perform testing annually.

If the minor noted deficiencies identified above and noted within the inspection report are not corrected within the indicated timeframe, the project will be placed in an "Inactive" status and will be ineligible for PL84-99 assistance until such time that the deficiencies have been corrected by the city and subsequently accepted by USACE.

Notwithstanding the deficiencies identified, I am pleased to report that the system should perform as intended. However, the longer the identified deficiencies go unrepaired and rectified the greater the risk to public safety. You and your staff during the inspection demonstrated a strong willingness to correct the deficiencies identified and bring the project to the original intended standards.

I extend my thanks to both yourself and the staff that maintains the project for your cooperation and presence during the inspection. If you have any questions concerning the inspection, or other matters pertaining to the Naugatuck River Right Bank-Southend Ansonia & Derby/Housatonic River Left Bank Derby CT Flood Damage Reduction (FDR) system, please call me at (978) 318-8722 or Scott Michalak, NAE District Levee Safety Program Manager, at (978) 318-8350.

Sincerely,



FOR H. Farrell McMillan, P.E.
Chief, Engineering/Planning Division
Levee Safety Officer

Enclosure

Copy Furnished (with Enclosure):

Mr. Anthony Staffieri
Mayor, City of Derby
Derby City Hall
1 Elizabeth Street
Derby, Connecticut 06418

Mr. Kevin M. Merli
Director, Mitigation Division
FEMA Region 1
99 High Street, 6th Floor
Boston, Massachusetts 02110-2320

US Army Corps of Engineers®

Flood Damage Reduction Segment / System Inspection Report

Name of Segment / System: Naugatuck River RB-Southend Derby/Housatonic River LB Derby, CT

Public Sponsor(s): City of Derby, CT

Public Sponsor Representative: Mr. Ron Culmo, Director - Derby DPW

Sponsor Phone: 203-736-1468

Sponsor Email: -

Corps of Engineers Inspector: Alex Garneau, Scott Michalak, Heather Rausch Date of Inspection: 4/23/2009

Inspection Report Prepared By: Alex Garenau Date Report Prepared: 1/25/2010

Internal Technical Review (for Periodic Inspections) By: NA Date of ITR: 2/1/2010

Final Approved By: Scott Michalak Date Approved: 1/25/2010

Type of Inspection:

- ☐ **Initial Eligibility Inspection**
- ☒ **Continuing Eligibility Inspection (Routine)**
- ☐ **Continuing Eligibility Inspection (Periodic)**

Overall Segment / System Rating:

- ☐ **Acceptable**
- ☒ **Minimally Acceptable**
- ☐ **Unacceptable**

Contents of Report:

- ☒ **Instructions**
- ☐ **Initial Eligibility Inspection**
- ☒ **General Items for All Flood Control Works**
- ☒ **Levee Embankment**
- ☒ **Concrete Floodwalls**
- ☒ **Sheet Pile and Concrete I-walls**
- ☒ **Interior Drainage System**
- ☒ **Pump Stations**
- ☒ **FDR System Channels**

Note: In addition to the report contents indicated here, a plan view drawing of the system, with stationing, should be included with this report to reference locations of items rated less than acceptable. Photos of general system condition and any noted deficiencies should also be attached.

THIS PAGE INTENTIONALLY LEFT BLANK

US Army Corps
of Engineers®

Flood Damage Reduction Segment / System
Public Sponsor Pre-Inspection Form

The following information is to be provided by the levee district sponsor prior to an inspection. This information will be used to help evaluate the organizational capability of the levee district to manage the levee segment / system maintenance program.

1. **Levee segment / system and district: (name of the segment / system and levee district)**
2. **Reporting period: (month/day/year to month/day/year)**
3. **Summary of maintenance required by last inspection report:**
4. **Summary of maintenance performed this reporting period:**
5. **Summary of maintenance planned next reporting period:**
6. **Summary of changes to segment / system since last inspection:**
7. **Problems/ issues requiring the assistance of the US Army Corps of Engineers:**

Public Sponsor Pre-Inspection Report

The following information is to be provided by the levee district sponsor prior to an inspection

8. Levee district organization: (elected or appointed levee district officials and key employees)

Name	Position	Mailing Address	Phone Number	Email Address

General Instructions for the Inspection of Flood Damage Reduction Segments / Systems

A. Purpose of USACE Inspections:

The primary purpose of these inspections is to prevent loss of life and catastrophic damages; preserve the value of Federal investments, and to encourage non-Federal sponsors to bear responsibility for their own protection. Inspections should assure that Flood Damage Reduction structures and facilities are continually maintained and operated as necessary to obtain the maximum benefits. Inspections are also conducted to determine eligibility for Rehabilitation Assistance under authority of PL 84-99 for Federal and non-Federal systems. (ER 1130-2-530, ER 500-1-1)

B. Types of Inspections:

The Corps conducts several types of inspections of Flood Damage Reduction systems, as outlined below:

Initial Eligibility Inspections	Continuing Eligibility Inspections	
	Routine Inspections	Periodic Inspections
IEIs are conducted to determine whether a non-Federally constructed Flood Damage Reduction system meets the minimum criteria and standards set forth by the Corps for initial inclusion into the Rehabilitation and Inspection Program.	RIs are intended to verify proper maintenance, owner preparedness, and component operation.	PIs are intended to verify proper maintenance and component operation and to evaluate operational adequacy, structural stability, and safety of the system. Periodic Inspections evaluate the system's original design criteria vs. current design criteria to determine potential performance impacts, evaluate the current conditions, and compare the design loads and design analysis used against current design standards. This is to be done to identify components and features for the sponsor that need to be monitored more closely over time or corrected as needed. (Periodic Inspections are used as the basis of risk assessments.)

C. Inspection Boundaries:

Inspections should be conducted so as to rate each Flood Damage Reduction "Segment" of the system. The overall system rating will be the lowest segment rating in the system.

Project	System	Segment
A flood damage reduction project is made up of one or more flood damage reduction systems which were under the same authorization.	A flood damage reduction system is made up of one or more flood damage reduction segments which collectively provide flood damage reduction to a defined area. Failure of one segment within a system constitutes failure of the entire system. Failure of one system does not affect another system.	A flood damage reduction segment is defined as a discrete portion of a flood damage reduction system that is operated and maintained by a single entity. A flood damage reduction segment can be made up of one or more features (levee, floodwall, pump stations, etc).

D. Land Use Definitions:

The following three definitions are intended for use in determining minimum required inspection intervals and initial requirements for inclusion into the Rehabilitation and Inspection Program. Inspections should be considered for all systems that would result in significant environmental or economic impact upon failure regardless of specific land use.

Agricultural	Rural	Urban
Protected population in the range of zero to 5 households per square mile protected.	Protected population in the range of 6 to 20 households per square mile protected.	Greater than 20 households per square mile; major industrial areas with significant infrastructure investment. Some protected urban areas have no permanent population but may be industrial areas with high value infrastructure with no overnight population.

E. Use of the Inspection Report Template:

The report template is intended for use in all Army Corps of Engineers inspections of levee and floodwall systems and flood damage reduction channels. The section of the template labeled "Initial Eligibility" only needs to be completed during Initial Eligibility Inspections of Non-Federally constructed Flood Damage Reduction Systems. The section labeled "General Items" needs to be completed with every inspection, along with all other sections that correspond to features in the system. The section labeled "Public Sponsor Pre-Inspection Report" is intended for completion before the inspection, if possible.

F. Individual Item / Component Ratings:

Assessment of individual components rated during the inspection should be based on the criteria provided in the inspection report template, though inspectors may incorporate additional items into the report based on the characteristics of the system. The assessment of individual components should be based on the following definitions.

Acceptable Item	Minimally Acceptable Item	Unacceptable Item
The inspected item is in satisfactory condition, with no deficiencies, and will function as intended during the next flood event.	The inspected item has one or more minor deficiencies that need to be corrected. The minor deficiency or deficiencies will not seriously impair the functioning of the item as intended during the next flood event.	The inspected item has one or more serious deficiencies that need to be corrected. The serious deficiency or deficiencies will seriously impair the functioning of the item as intended during the next flood event.

G. Overall Segment / System Ratings:

Determination of the overall system rating is based on the definitions below. Note that an Unacceptable System Rating may be either based on an engineering determination that concluded that noted deficiencies would prevent the system from functioning as intended during the next flood event, or based on the sponsor's demonstrated lack of commitment or inability to correct serious deficiencies in a timely manner.

Acceptable System	Minimally Acceptable System	Unacceptable System
All items or components are rated as Acceptable.	One or more items are rated as Minimally Acceptable or one or more items are rated as Unacceptable and an engineering determination concludes that the Unacceptable items would not prevent the segment / system from performing as intended during the next flood event.	One or more items are rated as Unacceptable and would prevent the segment / system from performing as intended, or a serious deficiency noted in past inspections (which had previously resulted in a minimally acceptable system rating) has not been corrected within the established timeframe, not to exceed two years.

H. Eligibility for PL84-99 Rehabilitation Assistance:

Inspected systems that are not operated and maintained by the Federal government may be Active in the Corps' Rehabilitation and Inspection Program (RIP) and eligible for rehabilitation assistance from the Corps as defined below:

If the Overall System Rating is Acceptable	If the Overall System Rating is Minimally Acceptable	If the Overall System Rating is Unacceptable
The system is active in the RIP and eligible for PL84-99 rehabilitation assistance.	The system is Active in the RIP during the time that it takes to make needed corrections. Active systems are eligible for rehabilitation assistance. However, if the sponsor does not present USACE with proof that serious deficiencies (which had previously resulted in a minimally acceptable system rating) were corrected within the established timeframe, then the system will become Inactive in the RIP.	The system is Inactive in the RIP, and the status will remain Inactive until the sponsor presents USACE with proof that all items rated Unacceptable have been corrected. Inactive systems are ineligible for rehabilitation assistance.

I. Reporting:

After the inspection, the Corps is responsible for assembling an inspection report (or a summary report if it was a Periodic Inspection) including the following information:

a. All sections of the report template used during the inspection, including the cover and pre-inspection materials. (Supplemental data collected, and any sections of the template that weren't used during the inspection do not need to be included with the report.)

b. Photos of the general system condition and noted deficiencies.

c. A plan view drawing of the system, with stationing, to reference locations of items rated less than acceptable.

d. The relative importance of the identified maintenance issues should be specified in the transmittal letter.

e. If the Overall System Rating is Minimally Acceptable, the report needs to establish a timeframe for correction of serious deficiencies noted (not to exceed two years) and indicate that if these items are not corrected within the required timeframe, the system will be rated as Unacceptable and made Inactive in the Rehabilitation Inspection Program.

J. Notification:

Reports are to be disseminated as follows within 30 days of the inspection date.

If the Overall System Rating is Acceptable	If the Overall System Rating is Minimally Acceptable	If the Overall System Rating is Unacceptable
Reports need to be provided to the local sponsor and the county emergency management agency.	Reports need to be provided to the local sponsor, state emergency management agency, county emergency management agency, and to the FEMA region.	Reports need to be provided to the local sponsor, state emergency management agency, county emergency management agency, FEMA region, and to the Congressional delegation within 30 days of the inspection.

THIS PAGE INTENTIONALLY LEFT BLANK

General Items for All Flood Damage Reduction Segments / Systems

For use during all inspections of all Flood Damage Reduction Segments / Systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Operations and Maintenance Manuals	A	A	Levee Owner's Manual, O&M Manuals, and/or manufacturer's operating instructions are present.	
		M	Sponsor manuals are lost or missing or out of date; however, sponsor will obtain manuals prior to next scheduled inspection.	
		U	Sponsor has not obtained lost or missing manuals identified during previous inspection.	
2. Emergency Supplies and Equipment (A or M only)	A	A	The sponsor maintains a stockpile of sandbags, shovels, and other flood fight supplies which will adequately supply all needs for the initial days of a flood fight. Sponsor determines required quantity of supplies after consulting with inspector.	
		M	The sponsor does not maintain an adequate supply of flood fighting materials as part of their preparedness activities.	
3. Flood Preparedness and Training (A or M only)	A	A	Sponsor has a written system-specific flood response plan and a solid understanding of how to operate, maintain, and staff the FDR system during a flood. Sponsor maintains a list of emergency contact information for appropriate personnel and other emergency response agencies.	
		M	The sponsor maintains a good working knowledge of flood response activities, but documentation of system-specific emergency procedures and emergency contact personnel is insufficient or out of date.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

THIS PAGE INTENTIONALLY LEFT BLANK

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Unwanted Vegetation Growth[1]	U	A	The levee has little or no unwanted vegetation (trees, bush, or undesirable weeds), except for vegetation that is properly contained and/or situated on overbuilt sections, such that the mandatory 3-foot root-free zone is preserved around the levee profile. The levee has been recently mowed. The vegetation-free zone extends 15 feet from both the landside and riverside toes of the levee to the centerline of the tree. If the levee access easement doesn't extend to the described limits, then the vegetation-free zone must be maintained to the easement limits. Reference EM 1110-2-301 or Corps policy for regional vegetation variance.	NRDB_2009_a_0002: Protected side levee slope is well maintained along this segment.: Continue to maintain. (A) NRDB_2009_a_0009: Minor vegetation growing along the toe of the levee. Note heavy vegetation adjacent to the patrol road blocks the view of ponds adjacent to the levee ,making it hard to notice signs of seepage.: Heavy vegetation should be thinned/cleared so ponds can be observed during flood events. (A) NRDB_2009_a_0012: Minor vegetation growing along bank.: Continue to spray vegetation routinely. (M)
		M	Minimal vegetation growth (brush, weeds, or trees 2 inches in diameter or smaller) is present within the zones described above. This vegetation must be removed but does not currently threaten the operation or integrity of the levee.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	Significant vegetation growth (brush, weeds, or any trees greater than 2 inches in diameter) is present within the zones described above and must to be removed to reestablish or ascertain levee integrity.	NRDB_2009_a_0014: A tree has been planted on the crown.: Tree needs to be removed. (U) NRDB_2009_a_0015: A tree is growing adjacent to the toe.: Tree needs to be removed. (U) NRDB_2009_a_0018: Significant vegetation growing along riprap and bridge wingwall.: Vegetation needs to be removed. (U) NRDB_2009_a_0021: Significant vegetation is growing along this segment of the levee.: Vegetation needs to be cleared. (U) NRDB_2009_a_0023: Significant vegetation growing adjacent to levee.: Vegetation needs to be clered to a minimum of 15 feet fron the toe of the levee. (A) NRDB_2009_a_0025: Levee slopes are in good condition.: Continue to maintain. (A) NRDB_2009_a_0030: Trees are growing along the levee toe.: Trees need to be removed. (U) NRDB_2009_a_0033: Downstream end of RT 8 impervious embankment. Embankment is currently covered in significant vegetation, including large trees, potentially compromising the impervious layer.: Embankment slope needs to be cleared of vegetation and impervious layer needs to be repaired. (U) NRDB_2009_a_0034: Upstream end of RT 8 embankment. Embankment is covered in significant vegetation, including large trees, potentially compromising the impervious layer.: Embankment slope needs to be cleared of vegetation and impervious layer needs to be repaired. (U) NRDB_2009_a_0035: Ornamental bushes and trees have been planted on the slope.: Trees and bushes should be relocated at least 15 feet from the levee toe. (U) NRDB_2009_a_0036: Good condition. A paved bike/walking trail has been added to the levee crest.: Continue to maintain. (A)
2. Sod Cover	A	A	There is good coverage of sod over the levee.	
		M	Approximately 25% of the sod cover is missing or damaged over a significant portion or over significant portions of the levee embankment. This may be the result of over-grazing or feeding on the levee, unauthorized vehicular traffic, chemical or insect problems, or burning during inappropriate seasons.	
		U	Over 50% of the sod cover is missing or damaged over a significant portion or portions of the levee embankment.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		N/A	Surface protection is provided by other means.	
3. Encroachments	M	A	No trash, debris, unauthorized farming activity, structures, excavations, or other obstructions present within the easement area. Encroachments have been previously reviewed by the Corps, and it was determined that they do not diminish proper functioning of the levee.	NRDB_2009_a_0040: A front loader has been parked at the toe of the levee.: Front loader should be relocated at least 15 feet from the toe. (M)
		M	Trash, debris, unauthorized farming activity, structures, excavations, or other obstructions present, or inappropriate activities noted that should be corrected but will not inhibit operations and maintenance or emergency operations. Encroachments have not been reviewed by the Corps.	
		U	Unauthorized encroachments or inappropriate activities noted are likely to inhibit operations and maintenance, emergency operations, or negatively impact the integrity of the levee.	
4. Closure Structures (Stop Log, Earthen Closures, Gates, or Sandbag Closures) (A or U only)	A	A	Closure structure in good repair. Placing equipment, stoplogs, and other materials are readily available at all times. Components are clearly marked and installation instructions/ procedures readily available. Trial erections have been accomplished in accordance with the O&M Manual.	NRDB_2009_a_0016: Railroad Gate #1. Structure and gate are in good condition.: Continue to maintain. (A) NRDB_2009_a_0019: Railroad Gate # 2A. Gate is in fair condition, but there is an unacceptable amount of vegetation adjacent to the gate structure.: Vegetation needs to be cleared. (U) NRDB_2009_a_0020: Railroad Gate # 2B. Gate is in fair condition, but there is an unacceptable amount of vegetation adjacent to the gate structure.: Vegetation needs to be cleared. (U) NRDB_2009_a_0029: Rairoad Gate # 3. Gate is in fair condition. Wingwalls are fair, with minor cracking and spalling. Gate sill has significant spalling. Moderate vegetation is growing adjacent to the walls.: Vegetation needs to be cleared. Monitor concrete deterioration. (M)
		U	Any of the following issues is cause for this rating: Closure structure in poor condition. Parts missing or corroded. Placing equipment may not be available within the anticipated warning time. The storage vaults cannot be opened during the time of inspection. Components of closure are not clearly marked and installation instructions/ procedures are not readily available. Trial erections have not been accomplished in accordance with the O&M Manual.	
		N/A	There are no closure structures along this component of the FDR segment / system.	
5. Slope Stability	A	A	No slides, sloughs, tension cracking, slope depressions, or bulges are present.	
		M	Minor slope stability problems that do not pose an immediate threat to the levee embankment.	
		U	Major slope stability problems (ex. deep seated sliding) identified that must be repaired to reestablish the integrity of the levee embankment.	
6. Erosion/ Bank Caving	A	A	No erosion or bank caving is observed on the landward or riverward sides of the levee that might endanger its stability.	
		M	There are areas where minor erosion is occurring or has occurred on or near the levee embankment, but levee integrity is not threatened.	
		U	Erosion or caving is occurring or has occurred that threatens the stability and integrity of the levee. The erosion or caving has progressed into the levee section or into the extended footprint of the levee foundation and has compromised the levee foundation stability.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
7. Settlement[2]	A	A	No observed depressions in crown. Records exist and indicate no unexplained historical changes.	
		M	Minor irregularities that do not threaten integrity of levee. Records are incomplete or inclusive.	
		U	Obvious variations in elevation over significant reaches. No records exist or records indicate that design elevation is compromised.	
8. Depressions/ Rutting	A	A	There are scattered, shallow ruts, pot holes, or other depressions on the levee that are unrelated to levee settlement. The levee crown, embankments, and access road crowns are well established and drain properly without any ponded water.	NRDB_2009_a_0001: A paved access road/bike trail has been installed along the crest of the levee. The pavement is in good condition, with no signs of cracking or settlement.: Continue to maintain. (A)
		M	There are some infrequent minor depressions less than 6 inches deep in the levee crown, embankment, or access roads that will pond water.	
		U	There are depressions greater than 6 inches deep that will pond water.	
9. Cracking	A	A	Minor longitudinal, transverse, or desiccation cracks with no vertical movement along the crack. No cracks extend continuously through the levee crest.	
		M	Longitudinal and/or transverse cracks up to 6 inches in depth with no vertical movement along the crack. No cracks extend continuously through the levee crest. Longitudinal cracks are no longer than the height of the levee.	
		U	Cracks exceed 6 inches in depth. Longitudinal cracks are longer than the height of the levee and/or exhibit vertical movement along the crack. Transverse cracks extend through the entire levee width.	
10. Animal Control	M	A	Continuous animal burrow control program in place that includes the elimination of active burrowing and the filling in of existing burrows.	NRDB_2009_a_0026: Animal burrows found along this section of slope.: Burrows need to be excavated and backfilled. (M) NRDB_2009_a_0038: Numerous animal burrows noted along this segment of the levee.: Burrows need to be excavated and backfilled. (M)
		M	The existing animal burrow control program needs to be improved. Several burrows are present which may lead to seepage or slope stability problems, and they require immediate attention.	
		U	Animal burrow control program is not effective or is nonexistent. Significant maintenance is required to fill existing burrows, and the levee will not provide reliable flood protection until this maintenance is complete.	
11. Culverts/ Discharge Pipes[3] (This item includes both concrete and corrugated metal pipes.)	A	A	There are no breaks, holes, cracks in the discharge pipes/ culverts that would result in significant water leakage. The pipe shape is still essentially circular. All joints appear to be closed and the soil tight. Corrugated metal pipes, if present, are in good condition with 100% of the original coating still in place (either asphalt or galvanizing) or have been relined with appropriate material, which is still in good condition. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		M	There are a small number of corrosion pinholes or cracks that could leak water and need to be repaired, but the entire length of pipe is still structurally sound and is not in danger of collapsing. Pipe shape may be ovalized in some locations but does not appear to be approaching a curvature reversal. A limited number of joints may have opened and soil loss may be beginning. Any open joints should be repaired prior to the next inspection. Corrugated metal pipes, if present, may be showing corrosion and pinholes but there are no areas with total section loss. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	
		U	Culvert has deterioration and/or has significant leakage; it is in danger of collapsing or as already begun to collapse. Corrugated metal pipes have suffered 100% section loss in the invert. HOWEVER: Even if pipes appear to be in good condition, as judged by an external visual inspection, an Unacceptable Rating will be assigned if the condition of pipes has not been verified using television camera video taping or visual inspection methods within the past five years, and reports for all pipes are not available for review by the inspector.	
		N/A	There are no discharge pipes/ culverts.	
12. Riprap Revetments & Bank Protection	A	A	No riprap displacement or stone degradation that could pose an immediate threat to the integrity of channel bank. Riprap intact with no woody vegetation present.	NRDB_2009_a_0010: Riprap is in generally good condition. In some locations riprap has been piled into small cairns.: Displaced riprap should be returned to original locations. (M) NRDB_2009_a_0024: Riprap slopes are in good condition.: Continue to maintain. (A) NRDB_2009_a_0041: Riprap slope is in good condition.: Continue to maintain. (A)
		M	Minor riprap displacement or stone degradation that could pose an immediate threat to the integrity of the channel bank. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide.	
		U	Significant riprap displacement, exposure of bedding, or stone degradation observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Rock protection is hidden by dense brush, trees, or grasses.	
		N/A	There is no riprap protecting this feature of the segment / system, or riprap is discussed in another section.	
13. Revetments other than Riprap	M	A	Existing revetment protection is properly maintained, undamaged, and clearly visible.	NRDB_2009_a_0005: Metal bin type retaining wall. Wall is in fair to poor condition.: Continue to monitor. (M)
		M	Minor revetment displacement or deterioration that does not pose an immediate threat to the integrity of the levee. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide.	
		U	Significant revetment displacement, deterioration, or exposure of bedding observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Revetment protection is hidden by dense brush and trees.	
		N/A	There are no such revetments protecting this feature of the segment / system.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
14. Underseepage Relief Wells/ Toe Drainage Systems	U	A	Toe drainage systems and pressure relief wells necessary for maintaining FDR segment / system stability during high water functioned properly during the last flood event and no sediment is observed in horizontal system (if applicable). Nothing is observed which would indicate that the drainage systems won't function properly during the next flood, and maintenance records indicate regular cleaning. Wells have been pumped tested within the past 5 years and documentation is provided.	NRDB_2009_a_0003: Vegetation and sediment present on riprap toe drain.: Riprap should be cleared of sediment and vegetation to provide proper drainage. Toe drain system needs to be inspected by camera. (U) NRDB_2009_a_0011: Numerous small areas of standing water noted along the toe of the levee in this area. It was unclear during the inspection whether this was due to poor drainage or possible signs of seepage.: Community should further investigate and inspect. (U) NRDB_2009_a_0013: Relief wells are in poor condition. Vegetation needs to be cleared from structures. Presence of standing water indicates that wells may be non functional.: Wells need to be inspected and tested per O&M manual to determine if they are functioning as designed. (U) NRDB_2009_a_0037: Toe drain riprap is clear of vegetation, and risers are visible. Toe drain system needs to be inspected by camera.: Inspect toe drain system with remote camera. (U)
		M	Toe drainage systems or pressure relief wells are damaged and may become clogged if they are not repaired. Maintenance records are incomplete or indicate irregular cleaning and pump testing.	
		U	Toe drainage systems or pressure relief wells necessary for maintaining FDR segment / system stability during flood events have fallen into disrepair or have become clogged. No maintenance records. No documentation of the required pump testing.	
		N/A	There are no relief wells/ toe drainage systems along this component of the FDR segment / system.	
15. Seepage	M	A	No evidence or history of unrepaired seepage, saturated areas, or boils.	NRDB_2009_a_0004: Location of existing pond. Pond is obscured by vegetation, making it hard to observe potential seepage during high water events.: Clear vegetation and inspect for seepage during high water events. (A) Wet spots and standing water were observed along the protected side of the levee in the vicinity of Relief Wells 1-4. It is unclear if these are due to seepage or to a failure of the toe drain/relief well system (see above comments in Section 14). These areas need to be further inspected to determine the source of the water.
		M	Evidence or history of minor unrepaired seepage or small saturated areas at or beyond the landside toe but not on the landward slope of levee. No evidence of soil transport.	
		U	Evidence or history of active seepage, extensive saturated areas, or boils.	

[1] If there is significant growth on the levee that inhibits the inspection of animal burrows or other items, the inspection should be ended until this item is corrected.
[2] Detailed survey elevations are normally required during Periodic Inspections, and whenever there are obvious visual settlements.
[3] The decision on whether or not USACE inspectors should enter a pipe to perform a detailed inspection must be made at the USACE District level. This decision should be made in conjunction with the District Safety Office, as pipes may be considered confined spaces. This decision should consider the age of the pipe, the diameter of the pipe, the apparent condition of the pipe, and the length of the pipe. If a pipe is entered for the purposes of inspection, the inspector should record observations with a video camera in order that the condition of the entire pipe, including all joints, can later be assessed. Additionally, the video record provides a baseline to which future inspections can be compared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0001 **Name:** Start of Derby Segment **Caption:** View looking downstream at the start of the Derby segment showing the paved trail along the crest of the levee.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0002 **Name:** Protected Side Slope **Caption:** View showing the protected side slope. Slope is well maintained and in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0003 **Name:** Toe Drain **Caption:** Closeup of the toe drain showing vegetation and debris build up.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: NRDB_2009_a_0004 **Name:** EXisting pond, protected side **Caption:** View of an existing pond adjacent to the levee. Note the significant vegetation. Vegetation should be cleared to allow pond to be observed during periods of high water.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0005 **Name:** Retaining wall **Caption:** Metal bin retaining wall. Wall is in fair to poor condition. It appears t ohave suffered numerous collisions from vehicular traffic, possibly from plows or mowers.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0009 **Name:** View of the slope looking downstream **Caption:** View showing the heavy vegetation adjacent to the toe blocking view of the wet areas adjacent to the toe.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0010 **Name:** Displaced Riprap **Caption:** View of one of the cairns built out of displaced riprap. These should be removed and the riprap replaced along the slope.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction


Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: NRDB_2009_a_0011 **Name:** Ponding areas at levee toe **Caption:** View of the wet areas along this section of the toe. These need to be further investigated to determine if these are caused by failure of the toe drain and relief wells, or if they are possibly due to seepage.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

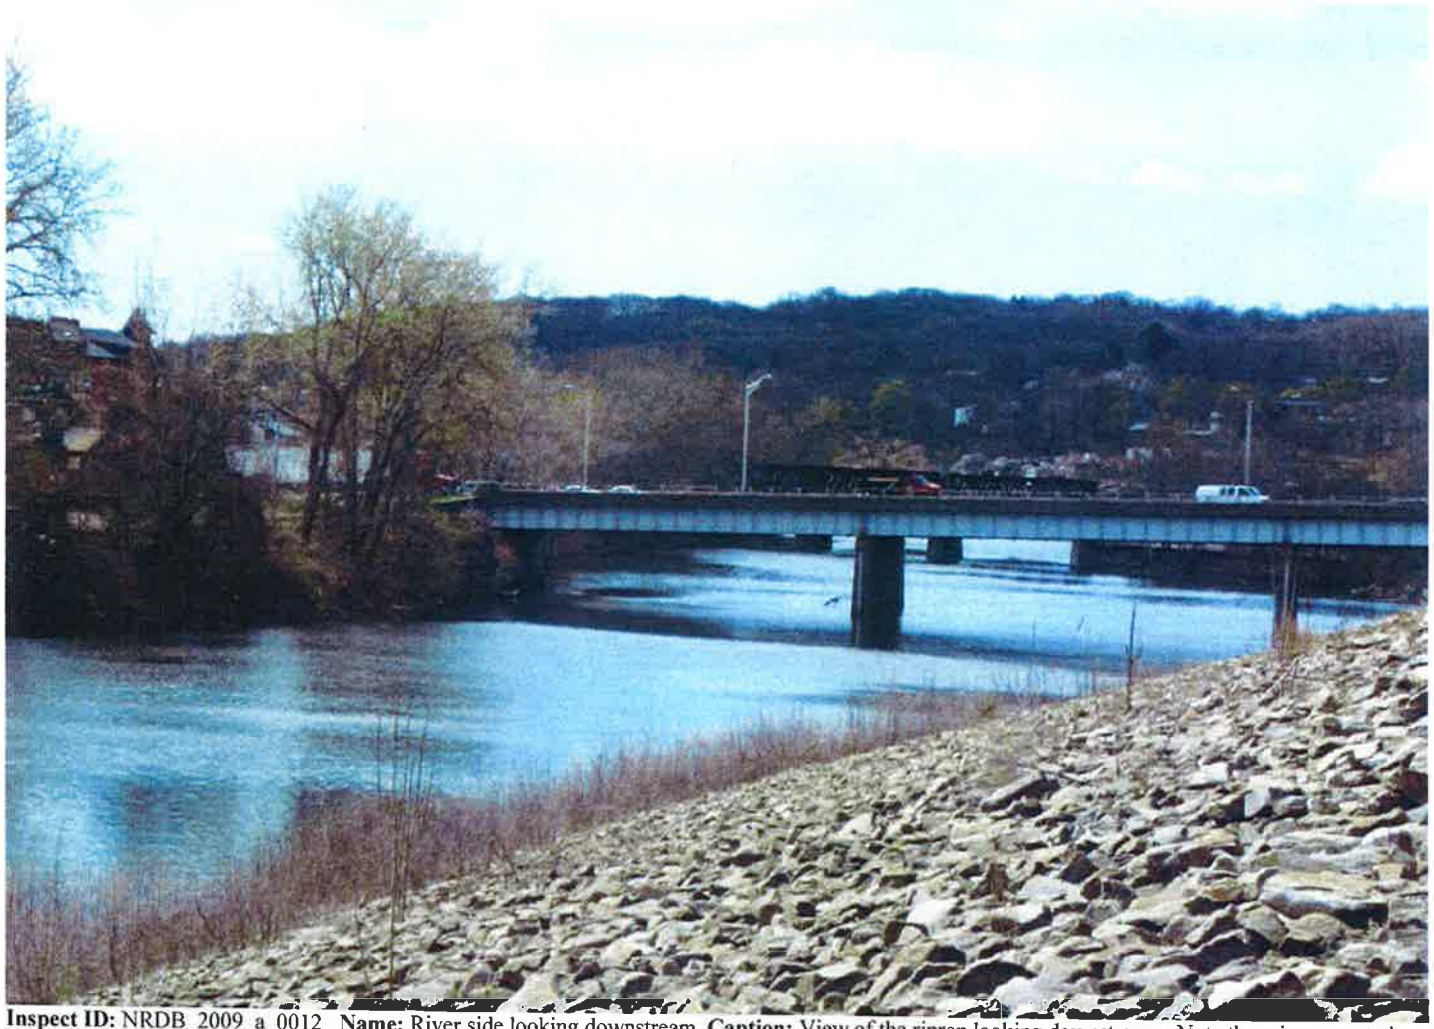

Inspect ID: NRDB_2009_a_0012 **Name:** River side looking downstream **Caption:** View of the riprap looking downstream. Note the minor vegetation along the channel bank.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0013 **Name:** Relief Well # 4 **Caption:** View of what appears to be Relief Well # 4. The trees growing next to it need to be cleared and the well inspected to determine if it is still functioning properly.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0013 **Name:** Relief Well # 1 **Caption:** View of what is believed to be Relief Well # 1. Structure is in poor condition and there is significant water ponding around the base of the structure. Structure needs to be repaired and the well inspected to determine if it is still functioning properly.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0033 **Name:** RT 8 Embankment **Caption:** View of the RT 8 Embankment looking upstream. Note the heavy vegetation growing on the slope, potentially compromising the impervious layer.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0034 **Name:** RT 8 Embankment **Caption:** Closeup showing the dense vegetation growing on the embankment slope.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: NRDB_2009_a_0035 **Name:** Landscaping at north end of Derby segment **Caption:** Tree planted adjacent to the levee. The tree needs to be removed.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0036 **Name:** North end of Derby segment **Caption:** View of the crest looking downstream showing the paved path installed on the crest. Path is well maintained and in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0037 **Name:** Toe drain **Caption:** View of the toe drain riprap. Some sections of the riprap have minor vegetation growing.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0038 **Name:** Animal Burrows **Caption:** View of one of the burrows noted along this segment.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0014 **Name:** Tree on levee slope **Caption:** View of an ornamental tree planted on the levee slope. Tree needs to be removed.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0015 **Name:** Trees on protected side slope **Caption:** View of two trees growing on the protected side of the levee slope. Trees need to be removed.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: NRDB_2009_a_0016 **Name:** Railroad Gate # 1 **Caption:** Railroad Gate # 1. Gate is in good condition. Access to the gate is sometimes blocked by the rail line. this is unacceptable, especially during inspections and potential flood conditions.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0019 **Name:** Railroad Gate # 2A **Caption:** Railroad Gate # 2A. Note the significant vegetation growing along the walls and in the closure area. The gate and walls are in fair condition. The vegetation needs to be cleared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction




Inspect ID: NRDB_2009_a_0020 **Name:** Railroad Gate # 2B **Caption:** Railroad Gate # 2B. This structure is in good condition. Moderate to significant vegetation is present, which needs to be cleared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0021 **Name:** Heavy vegetation along slope **Caption:** This section on the levee has heavy vegetation which needs to be cleared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

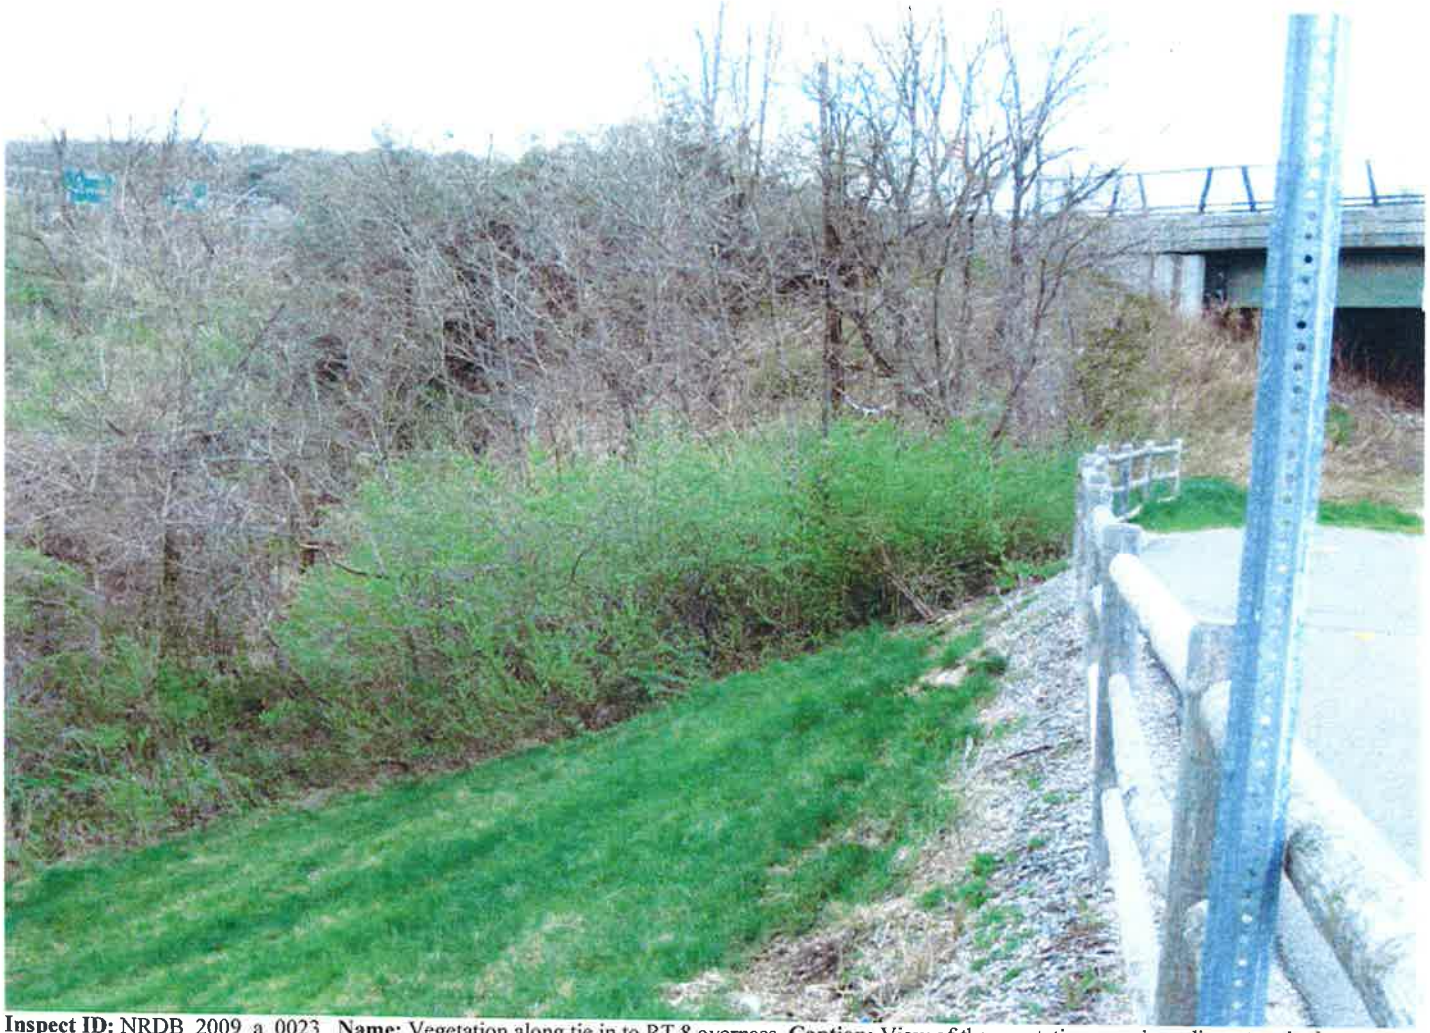

Inspect ID: NRDB_2009_a_0023 **Name:** Vegetation along tie in to RT 8 overpass **Caption:** View of the vegetation growing adjacent to the levee next to the Rt. 8 overpass. This vegetation needs to be cleared back at least 15 feet from the toe.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0024 **Name:** Housatonic Side looking upstream **Caption:** View of the riprap slope along the Housatonic River. Riprap is in good condition. Minor vegetation along the river bank.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction


Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems



Inspect ID: NRDB_2009_a_0025 **Name:** Protected side looking downstream **Caption:** View of the slope adjacent to Derby Pump Station. Slope is in generally good condition. The toe drain should be cleared of debris.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

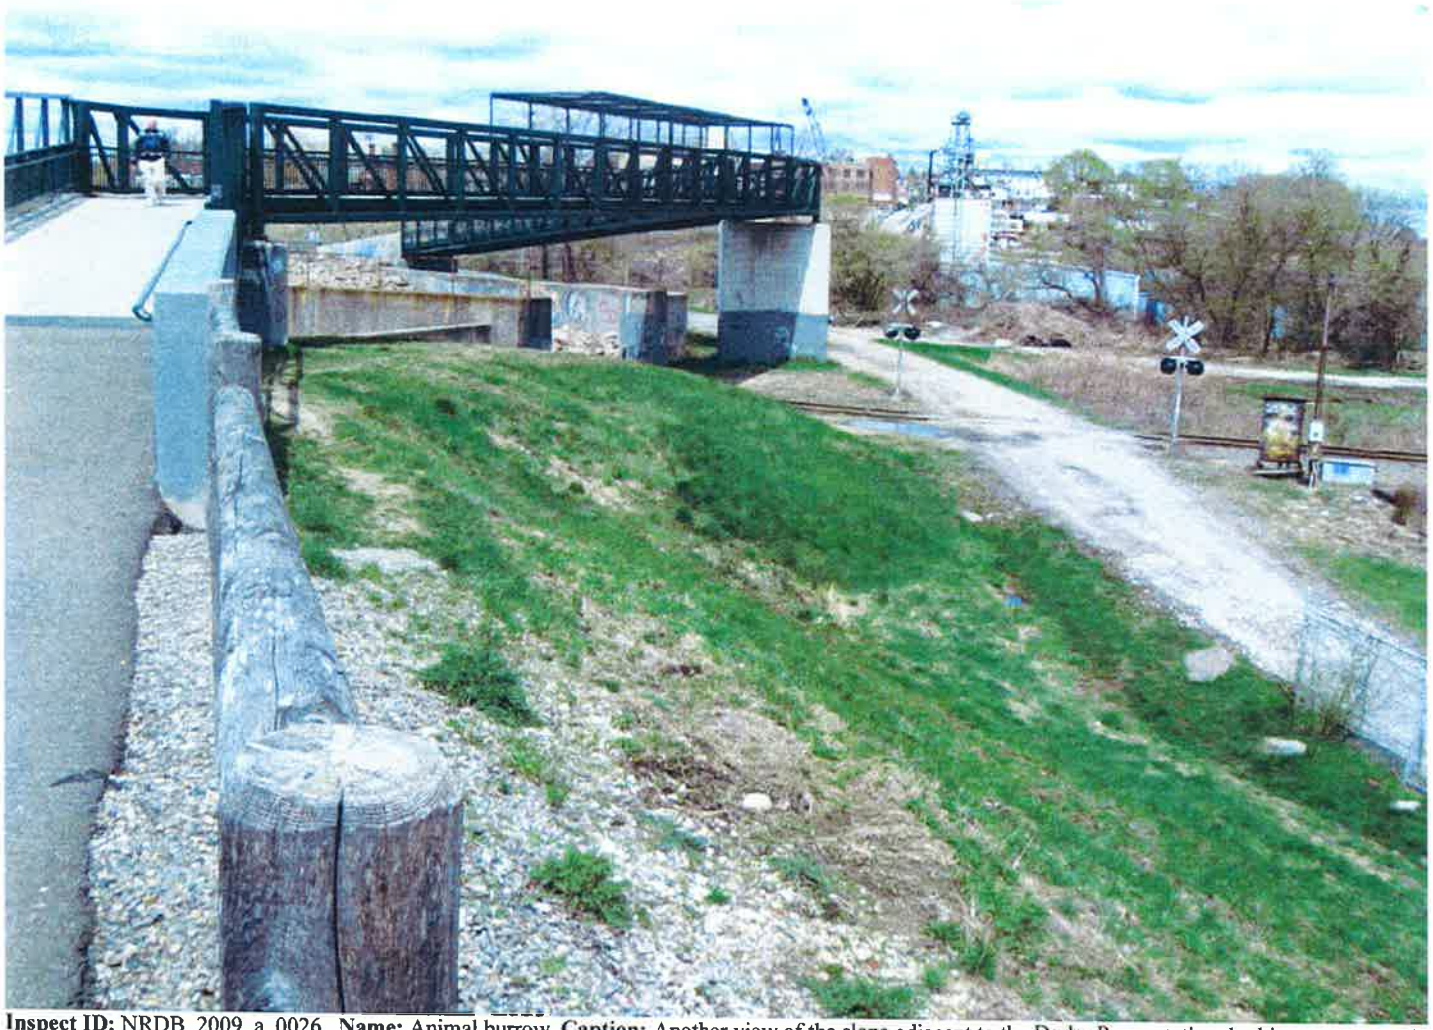

Inspect ID: NRDB_2009_a_0026 **Name:** Animal burrow **Caption:** Another view of the slope adjacent to the Derby Pump station, looking upstream. An active animal burrow was found here. Burrow shold be excavated and backfilled.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0029 **Name:** Closeup of the gate sill **Caption:** Closeup showing the shalling along the closure sill.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0029 **Name:** Railroad Gate # 3 **Caption:** Railroad Gate #3. The gate is in good condition. The walls and sill are in fair to poor condition, with some cracking and spalling. Joints are in fair condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0030 **Name:** Trees along the toe **Caption:** View of trees growing adjacent to the protected side toe.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction




Inspect ID: NRDB_2009_a_0040 **Name:** Bulldozer next to levee toe **Caption:** View of the bulldozer parked adjacent to the levee. This should be relocated at least 15 feet from the toe.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Levee Embankments

For use during Initial and Continuing Eligibility Inspections of levee segments / systems

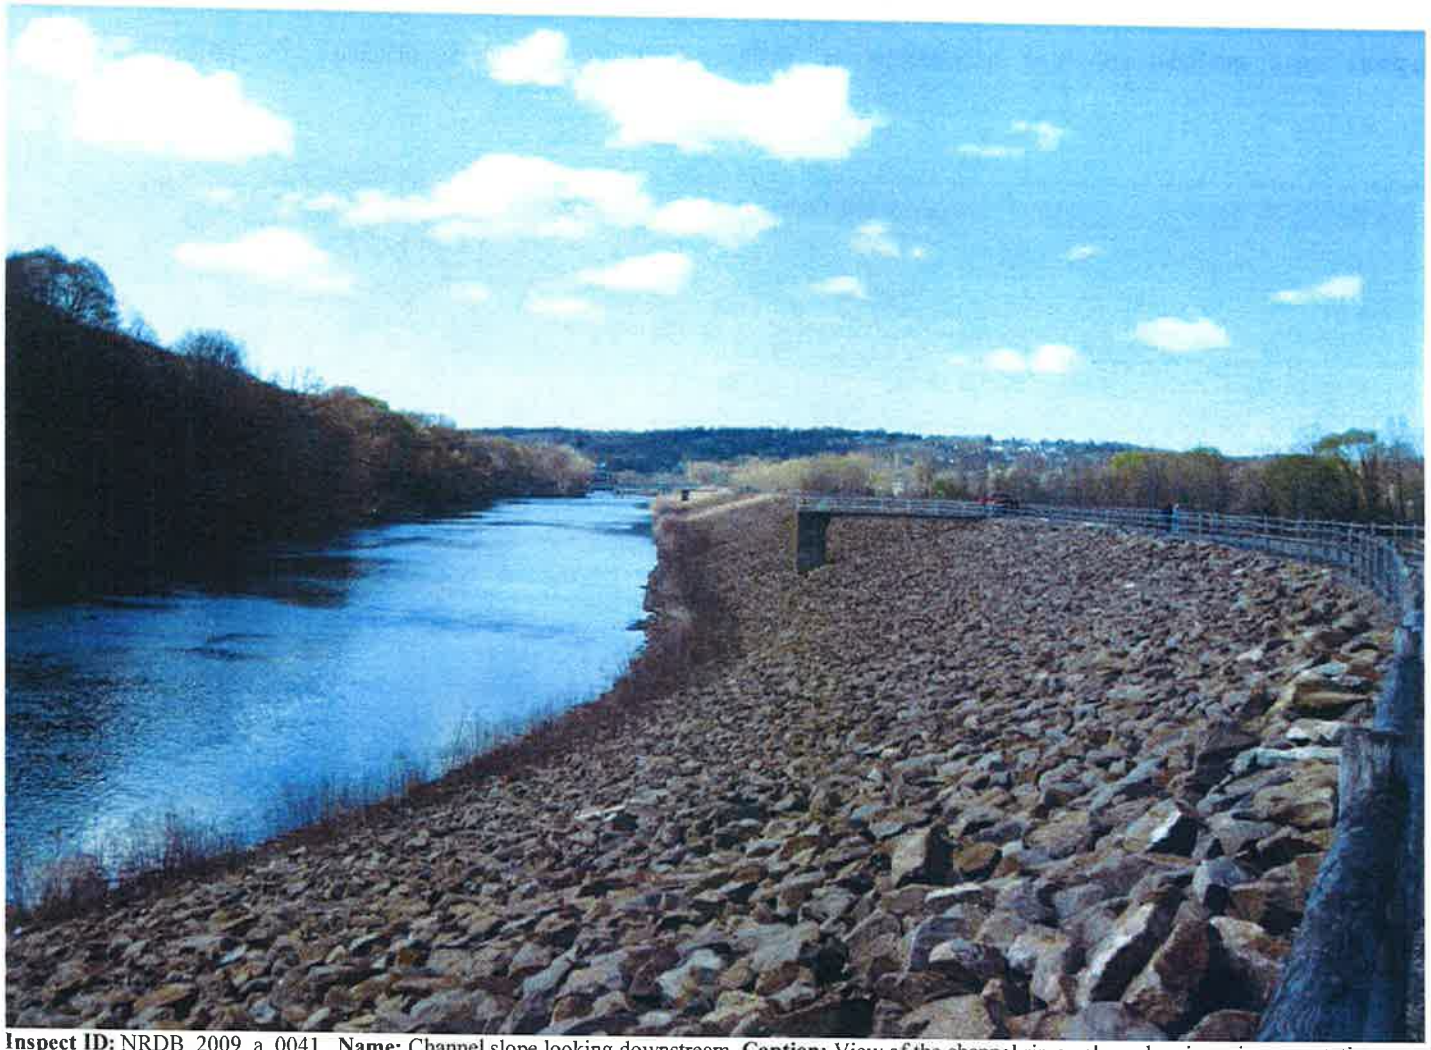

Inspect ID: NRDB_2009_a_0041 **Name:** Channel slope looking downstream **Caption:** View of the channel riprap slope showing minor vegetation growing along the bank.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Floodwalls

For use during Initial and Continuing Eligibility Inspections of all floodwalls

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Unwanted Vegetation Growth[1]	M	A	A grass-only or paved zone is maintained on both sides of the floodwall, free of all trees, brush, and undesirable weeds. The vegetation-free zone extends 15 feet from both the land and riverside of the floodwall, at ground-level, to the centerline of the tree. Additionally, an 8-foot root-free zone is maintained around the entire structure, including the floodwall toe, heel, and any toe-drains. If the floodwall access easement doesn't extend to the described limits, then the vegetation-free zone must be maintained to the easement limits. Reference EM 1110-2-301 and/or Corps policy for regional vegetation variance.	NRDB_2009_a_0017: Moderate vegetation growing along the floodwall.: Vegetation needs to be cleared. (M)
		M	Minimal vegetation growth (brush, weeds, or trees 2 inches in diameter or smaller) is present within the zones described above. This vegetation must be removed but does not currently threaten the operation or integrity of the floodwall.	
		U	Significant vegetation growth (brush, weeds, or any trees greater than 2 inches in diameter) is present within the zones described above. This vegetation threatens the operation or integrity of the floodwall and must be removed.	
2. Encroachments	A	A	No trash, debris, unauthorized structures, excavations, or other obstructions present within the easement area. Encroachments have been previously reviewed by the Corps, and it was determined that they do not diminish proper functioning of the floodwall.	
		M	Trash, debris, unauthorized structures, excavations, or other obstructions present, or inappropriate activities noted that should be corrected but will not inhibit operations and maintenance or emergency operations. Encroachments have not been reviewed by the Corps.	
		U	Unauthorized encroachments or inappropriate activities noted are likely to inhibit operations and maintenance, emergency operations, or negatively impact the integrity of the floodwall.	
3. Closure Structures (Stop Log Closures and Gates) (A or U only)	A	A	Closure structure in good repair. Placing equipment, stoplogs, and other materials are readily available at all times. Components are clearly marked and installation instructions/ procedures readily available. Trial erections have been accomplished in accordance with the O&M Manual.	
		U	Any of the following issues is cause for this rating: Closure structure in poor condition. Parts missing or corroded. Placing equipment may not be available within the anticipated warning time. The storage vaults cannot be opened during the time of inspection. Components of closure are not clearly marked and installation instructions/ procedures are not readily available. Trial erections have not been accomplished in accordance with the O&M Manual.	
		N/A	There are no closure structures along this component of the FDR segment / system.	
4. Concrete Surfaces	A	A	Negligible spalling, scaling or cracking. If the concrete surface is weathered or holds moisture, it is still satisfactory but should be seal coated to prevent freeze/ thaw damage.	NRDB_2009_a_0031: Floodwall is in good condition. Minor spalling noted. Joints are in fair condition.: Continue to maintain. (A)
		M	Spalling, scaling, and open cracking present, but the immediate integrity or performance of the structure is not threatened. Reinforcing steel may be exposed. Repairs/ sealing is necessary to prevent additional damage during periods of thawing and freezing.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Floodwalls

For use during Initial and Continuing Eligibility Inspections of all floodwalls

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	Surface deterioration or deep cracks present that may result in an unreliable structure. Any surface deterioration that exposes the sheet piling or lies adjacent to monolith joints may indicate underlying reinforcement corrosion and is unacceptable.	
5. Tilting, Sliding or Settlement of Concrete Structures[2]	A	A	There are no significant areas of tilting, sliding, or settlement that would endanger the integrity of the structure.	None visually observed.
		M	There are areas of tilting, sliding, or settlement (either active or inactive) that need to be repaired. The maximum offset, either laterally or vertically, does not exceed 2 inches unless the movement can be shown to be no longer actively occurring. The integrity of the structure is not in danger.	
		U	There are areas of tilting, sliding, or settlement (either active or inactive) that threaten the structure's integrity and performance. Any movement that has resulted in failure of the waterstop (possibly identified by daylight visible through the joint) is unacceptable. Differential movement of greater than 2 inches between any two adjacent monoliths, either laterally or vertically, is unacceptable unless it can be shown that the movement is no longer active. Also, if the floodwall is of I-wall construction, then any visible or measurable tilting of the wall toward the protected side that has created an open horizontal crack on the riverside base of a monolith is unacceptable.	
6. Foundation of Concrete Structures[1]	A	A	No active erosion, scouring, or bank caving that might endanger the structure's stability.	
		M	There are areas where the ground is eroding towards the base of the structure. Efforts need to be taken to slow and repair this erosion, but it is not judged to be close enough to the structure or to be progressing rapidly enough to affect structural stability before the next inspection. For the purposes of inspection, the erosion or scour is not closer to the riverside face of the wall than twice the floodwall's underground base width if the wall is of L-wall or T-wall construction; or if the wall is of sheetpile or I-wall construction, the erosion is not closer than twice the wall's visible height. Additionally, rate of erosion is such that the wall is expected to remain stabile until the next inspection.	
		U	Erosion or bank caving observed that is closer to the wall than the limits described above, or is outside these limits but may lead to structural instabilities before the next inspection. Additionally, if the floodwall is of I-wall or sheetpile construction, the foundation is unacceptable if any turf, soil or pavement material got washed away from the landside of the I-wall as the result of a previous overtopping event.	
7. Monolith Joints	M	A	The joint material is in good condition. The exterior joint sealant is intact and cracking/ desiccation is minimal. Joint filler material and/or waterstop is not visible at any point.	Joints are generally in good to fair condition. Joint sealant is cracked and dried in some sections. Joints should be resealed.
		M	The joint material has appreciable deterioration to the point where joint filler material and/or waterstop is visible in some locations. This needs to be repaired or replaced to prevent spalling and cracking during freeze/ thaw cycles, and to ensure water tightness of the joint.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Floodwalls

For use during Initial and Continuing Eligibility Inspections of all floodwalls

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	The joint material is severely deteriorated or the concrete adjacent to the monolith joints has spalled and cracked, damaging the waterstop; in either case damage has occurred to the point where it is apparent that the joint is no longer watertight and will not provide the intended level of protection during a flood.	
		N/A	There are no monolith joints in the floodwall.	
8. Underseepage Relief Wells/ Toe Drainage Systems	U	A	Toe drainage systems and pressure relief wells necessary for maintaining FDR segment / system stability during high water functioned properly during the last flood event and no sediment is observed in horizontal system (if applicable). Nothing is observed which would indicate that the drainage systems won't function properly during the next flood, and maintenance records indicate regular cleaning. Wells have been pumped tested within the past 5 years and documentation is provided.	Storm drains and toe drains need to be inspected by remote camera. Verify existence and locations of all risers and drains.
		M	Toe drainage systems or pressure relief wells are damaged and may become clogged if they are not repaired. Maintenance records are incomplete or indicate irregular cleaning and pump testing.	
		U	Toe drainage systems or pressure relief wells necessary for maintaining FDR segment / system stability during flood events have fallen into disrepair or have become clogged. No maintenance records. No documentation of the required pump testing.	
		N/A	There are no relief wells/ toe drainage systems along this component of the FDR segment / system.	
9. Seepage	A	A	No evidence or history of unrepaired seepage, saturated areas, or boils.	No sign of seepage along the floodwalls.
		M	Evidence or history of minor unrepaired seepage or small saturated areas at or beyond the landside toe but not on the landward slope of levee. No evidence of soil transport.	
		U	Evidence or history of active seepage, extensive saturated areas, or boils.	

[1] Inspectors must have as-built drawings available during the inspection so that the lateral distance to the heel and toe of the floodwalls can be determined in the field.
[2] The sponsor should be monitoring any observed movement to verify whether the movement is active or inactive.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Floodwalls

For use during Initial and Continuing Eligibility Inspections of all floodwalls




Inspect ID: NRDB_2009_a_0017 **Name:** Floodwall adjacent to RR Gate # 1 **Caption:** View of the wall adjacent to RR Gate #1. Wall is in good condition. Note vegetation growth along the wall which needs to be cleared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Floodwalls

For use during Initial and Continuing Eligibility Inspections of all floodwalls

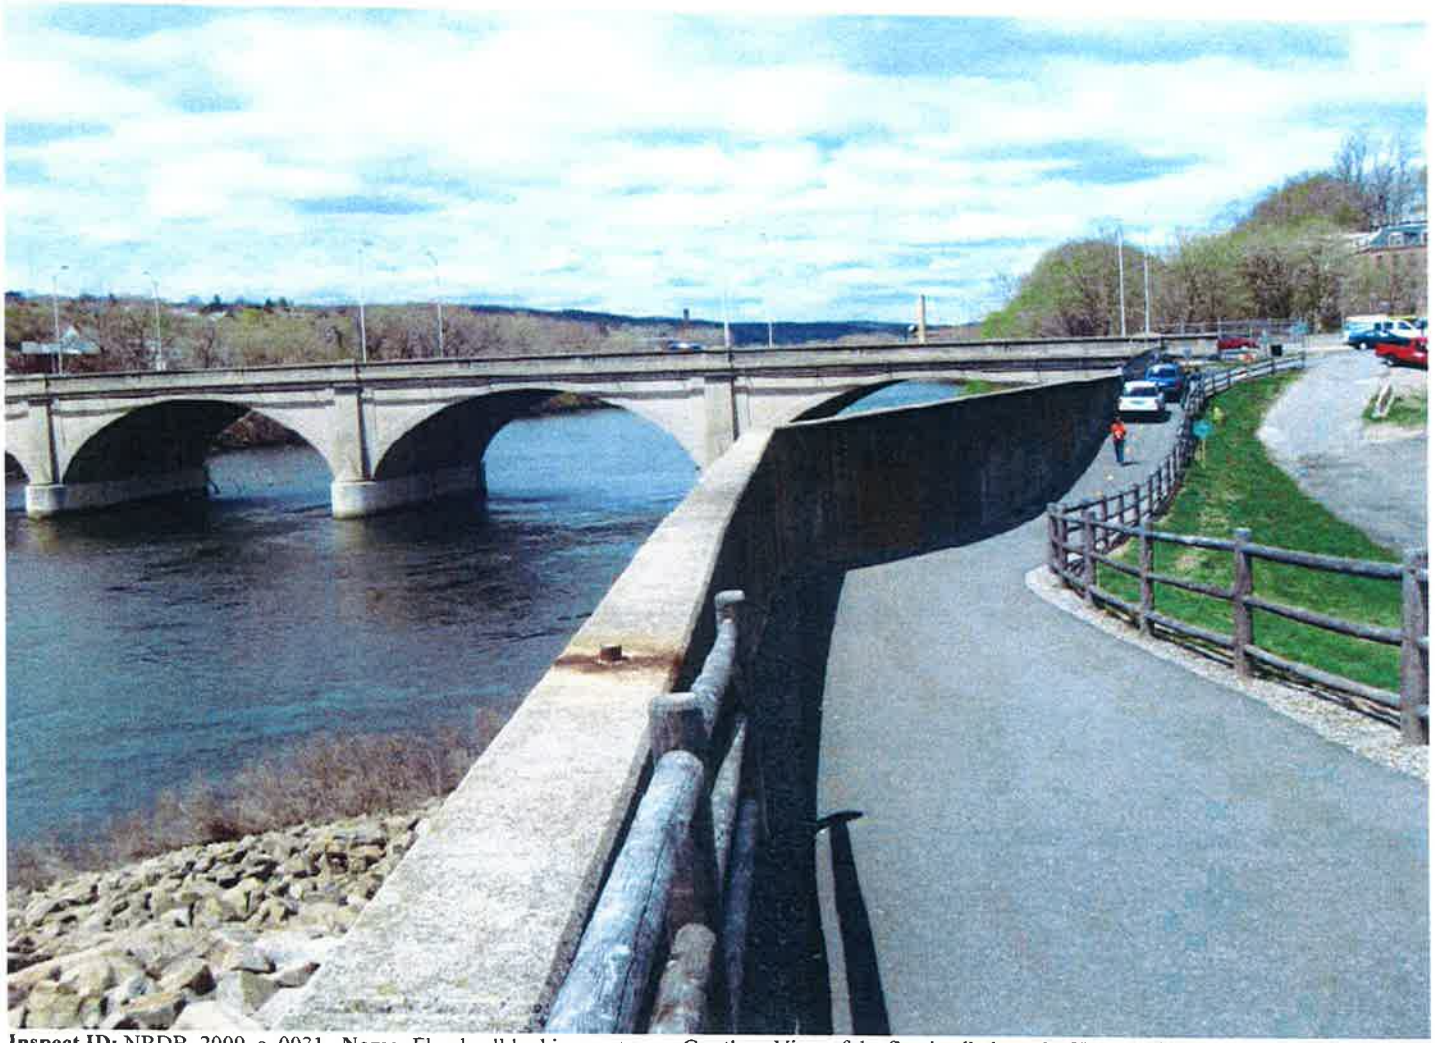

Inspect ID: NRDB_2009_a_0031 **Name:** Floodwall looking upstream **Caption:** View of the floodwall along the Housatonic River. Wall is in good condition, with some patched areas along the riverside face. Joints are generally in good to fair condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

THIS PAGE INTENTIONALLY LEFT BLANK

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Vegetation and Obstructions	M	A	No obstructions, vegetation, debris, or sediment accumulation noted within interior drainage channels or blocking the culverts, inlets, or discharge areas. Concrete joints and weep holes are free of grass and weeds.	NRDB_2009_a_0007: Sluice gate intake structure. Intake is clogged with vegetation and sediment leading to ponding of water.: Clear vegetation and dredge sediment. (U) Vegetation is generally in good condition.
		M	Obstructions, vegetation, debris, or sediment are minor and have not impaired channel flow capacity or blocked more than 10% of any culvert openings, but should be removed. A limited volume of grass and weeds may be present in concrete channel joints and weep holes.	
		U	Obstructions, vegetation, debris, or sediment have impaired the channel flow capacity or blocked more than 10% of a culvert opening. Sediment and debris removal required to re-establish flow capacity.	
2. Encroachments	A	A	No trash, debris, unauthorized structures, excavations, or other obstructions present within the easement area. Encroachments have been previously reviewed by the Corps, and it was determined that they do not diminish proper functioning of the interior drainage system.	
		M	Trash, debris, unauthorized structures, excavations, or other obstructions present, or inappropriate activities noted that should be corrected but will not inhibit operations and maintenance or emergency operations. Encroachments have not been reviewed by the Corps.	
		U	Unauthorized encroachments or inappropriate activities noted are likely to inhibit operations and maintenance, emergency operations, or negatively impact the integrity of this component of the interior drainage system.	
3. Ponding Areas	NA	A	No trash, debris, structures, or other obstructions present within the ponding areas. Sediment deposits do not exceed 10% of capacity.	
		M	Trash, debris, excavations, structures, or other obstructions present, or inappropriate activities that will not inhibit operations and maintenance. Sediment deposits do not exceed 30% of capacity.	
		U	Trash, debris, excavations, structures, or other obstructions, or other encroachments or activities noted that will inhibit operations, maintenance, or emergency work. Sediment deposits exceeds 30% of capacity.	
		N/A	There are no ponding areas associated with the interior drainage system.	
4. Fencing and Gates[1]	NA	A	Fencing is in good condition and provides protection against falling or unauthorized access. Gates open and close freely, locks are in place, and there is little corrosion on metal parts.	
		M	Fencing or gates are damaged or corroded but appear to be maintainable. Locks may be missing or damaged.	
		U	Fencing and gates are damaged or corroded to the point that replacement is required, or potentially dangerous features are not secured.	
		N/A	There are no features noted that require safety fencing.	
5. Concrete Surfaces (Such as gate	A	A	Negligible spalling, scaling or cracking. If the concrete surface is weathered or holds moisture, it is still satisfactory but should be seal coated to prevent freeze/ thaw damage.	NRDB_2009_a_0006: Sluice Gate #1. Gate and structure are in good condition.: Continue to maintain. (A)

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
wells, outfalls, intakes, or culverts)		M	Spalling, scaling, and open cracking present, but the immediate integrity or performance of the structure is not threatened. Reinforcing steel may be exposed. Repairs/ sealing is necessary to prevent additional damage during periods of thawing and freezing.	NRDB_2009_a_0022: Sluice Gate #3. Gate and gate tower are in good condition.: Continue to maintain. (A) NRDB_2009_a_0028: Sluice Gate #2. Gate and gate tower are in good condition.: Continue to maintain. (A) NRDB_2009_a_0042: Sluice Gate Structure #11. Structure is in good condition.: Continue to maintain. (A)
		U	Surface deterioration or deep cracks present that may result in an unreliable structure. Any surface deterioration that exposes the sheet piling or lies adjacent to monolith joints may indicate underlying reinforcement corrosion and is unacceptable.	
		N/A	There are no concrete items in the interior drainage system.	
6. Tilting, Sliding or Settlement of Concrete and Sheet Pile Structures[2] (Such as gate wells, outfalls, intakes, or culverts)	A	A	There are no significant areas of tilting, sliding, or settlement that would endanger the integrity of the structure.	
		M	There are areas of tilting, sliding, or settlement (either active or inactive) that need to be repaired. The maximum offset, either laterally or vertically, does not exceed 2 inches unless the movement can be shown to be no longer actively occurring. The integrity of the structure is not in danger.	
		U	There are areas of tilting, sliding, or settlement (either active or inactive) that threaten the structure's integrity and performance. Any movement that has resulted in failure of the waterstop (possibly identified by daylight visible through the joint) is unacceptable. Differential movement of greater than 2 inches between any two adjacent monoliths, either laterally or vertically, is unacceptable unless it can be shown that the movement is no longer active. Also, if the floodwall is of I-wall construction, then any visible or measurable tilting of the wall toward the protected side that has created an open horizontal crack on the riverside base of a monolith is unacceptable.	
		N/A	There are no concrete items in the interior drainage system.	
7. Foundation of Concrete Structures[3] (Such as culverts, inlet and discharge structures, or gatewells.)	A	A	No active erosion, scouring, or bank caving that might endanger the structure's stability.	
		M	There are areas where the ground is eroding towards the base of the structure. Efforts need to be taken to slow and repair this erosion, but it is not judged to be close enough to the structure or to be progressing rapidly enough to affect structural stability before the next inspection. The rate of erosion is such that the structure is expected to remain stabile until the next inspection.	
		U	Erosion or bank caving observed that may lead to structural instabilities before the next inspection.	
		N/A	There are no concrete items in the interior drainage system.	
8. Monolith Joints	A	A	The joint material is in good condition. The exterior joint sealant is intact and cracking/ desiccation is minimal. Joint filler material and/or waterstop is not visible at any point.	
		M	The joint material has appreciable deterioration to the point where joint filler material and/or waterstop is visible in some locations. This needs to be repaired or replaced to prevent spalling and cracking during freeze/ thaw cycles, and to ensure water tightness of the joint.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	The joint material is severely deteriorated or the concrete adjacent to the monolith joints has spalled and cracked, damaging the waterstop; in either case damage has occurred to the point where it is apparent that the joint is no longer watertight and will not provide the intended level of protection during a flood.	
		N/A	There are no monolith joints in the interior drainage system.	
9. Culverts/ Discharge Pipes[4]	U	A	There are no breaks, holes, cracks in the discharge pipes/ culverts that would result in significant water leakage. The pipe shape is still essentially circular. All joints appear to be closed and the soil tight. Corrugated metal pipes, if present, are in good condition with 100% of the original coating still in place (either asphalt or galvanizing) or have been relined with appropriate material, which is still in good condition. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	Pipes need to be inspected by remote camera.
		M	There are a small number of corrosion pinholes or cracks that could leak water and need to be repaired, but the entire length of pipe is still structurally sound and is not in danger of collapsing. Pipe shape may be ovalized in some locations but does not appear to be approaching a curvature reversal. A limited number of joints may have opened and soil loss may be beginning. Any open joints should be repaired prior to the next inspection. Corrugated metal pipes, if present, may be showing corrosion and pinholes but there are no areas with total section loss. Condition of pipes has been verified using television camera video taping or visual inspection methods within the past five years, and the report for every pipe is available for review by the inspector.	
		U	Culvert has deterioration and/or has significant leakage; it is in danger of collapsing or as already begun to collapse. Corrugated metal pipes have suffered 100% section loss in the invert. HOWEVER: Even if pipes appear to be in good condition, as judged by an external visual inspection, an Unacceptable Rating will be assigned if the condition of pipes has not been verified using television camera video taping or visual inspection methods within the past five years, and reports for all pipes are not available for review by the inspector.	
		N/A	There are no discharge pipes/ culverts.	
10. Sluice / Slide Gates[3]	A	A	Gates open and close freely to a tight seal or minor leakage. Gate operators are in good working condition and are properly maintained. Sill is free of sediment and other obstructions. Gates and lifters have been maintained and are free of corrosion. Documentation provided during the inspection.	
		M	Gates and/or operators have been damaged or have minor corrosion, and open and close with resistance or binding. Leakage quantity is controllable, but maintenance is required. Sill is free of sediment and other obstructions.	
		U	Gates do not open or close and/or operators do not function. Gate, stem, lifter and/or guides may be damaged or have major corrosion.	
		N/A	There are no sluice/ slide gates.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
11. Flap Gates/ Flap Valves/ Pinch Valves[1]	A	A	Gates/ valves open and close easily with minimal leakage, have no corrosion damage, and have been exercised and lubricated as required.	NRDB_2009_a_0032: Gates are in good condition. Continue to maintain. (A)
		M	Gates/ valves will not fully open or close because of obstructions that can be easily removed, or have minor corrosion damage that requires maintenance.	
		U	Gates/ valves are missing, have been damaged, or have deteriorated to the point that they need to be replaced.	
		N/A	There are no flap gates.	
12. Trash Racks (non-mechanical)	NA	A	Trash racks are fastened in place and properly maintained.	
		M	Trash racks are in place but are unfastened or have bent bars that allow debris to enter into the pipe or pump station, bars are corroded to the point that up to 10% of the sectional area may be lost. Repair or replacement is required.	
		U	Trash racks are missing or damaged to the extent that they are no longer functional and must be replaced. (For example, more than 10% of the sectional area may be lost.)	
		N/A	There are no trash racks, or they are covered in the pump stations section of the report.	
13. Other Metallic Items	A	A	All metal parts are protected from corrosion damage and show no rust, damage, or deterioration that would cause a safety concern.	
		M	Corrosion seen on metallic parts appears to be maintainable.	
		U	Metallic parts are severely corroded and require replacement to prevent failure, equipment damage, or safety issues.	
		N/A	There are no other significant metallic items.	
14. Riprap Revetments of Inlet/ Discharge Areas	A	A	No riprap displacement or stone degradation that could pose an immediate threat to the integrity of channel bank. Riprap intact with no woody vegetation present.	
		M	Minor riprap displacement or stone degradation that could pose an immediate threat to the integrity of the channel bank. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide.	
		U	Significant riprap displacement, exposure of bedding, or stone degradation observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Rock protection is hidden by dense brush, trees, or grasses.	
		N/A	There is no riprap protecting this feature of the segment / system, or riprap is discussed in another section.	
15. Revetments other than Riprap	NA	A	No riprap displacement or stone degradation that could pose an immediate threat to the integrity of channel bank. Riprap intact with no woody vegetation present.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		M	Minor riprap displacement or stone degradation that could pose an immediate threat to the integrity of the channel bank. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide.	
		U	Significant riprap displacement, exposure of bedding, or stone degradation observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Rock protection is hidden by dense brush, trees, or grasses.	
		N/A	There are no such revetments protecting this feature of the segment / system.	

[1] Proper operation of this item must be demonstrated during the inspection.
[2] The sponsor should be monitoring any observed movement to verify whether the movement is active or inactive.
[3] Inspectors must have as-built drawings available during the inspection so that the lateral distance to the heel and toe of the floodwalls can be determined in the field.
[4] The decision on whether or not USACE inspectors should enter a pipe to perform a detailed inspection must be made at the USACE District level. This decision should be made in conjunction with the District Safety Office, as pipes may be considered confined spaces. This decision should consider the age of the pipe, the diameter of the pipe, the apparent condition of the pipe, and the length of the pipe. If a pipe is entered for the purposes of inspection, the inspector should record observations with a video camera in order that the condition of the entire pipe, including all joints, can later be assessed. Additionally, the video record provides a baseline to which future inspections can be compared.
[5] Proper operation of the gates (full open and closed) must be demonstrated during the inspection if no documentation is available. Be aware of both manual and electrical operators.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems



Inspect ID: NRDB_2009_a_0042 **Name:** Sluice Gate #11 **Caption:** View of Sluice Gate #11. Structure is in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0006 **Name:** Sluice Gate # 1 **Caption:** View of Sluice Gate Structure # 1. Gate and tower are in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems



Inspect ID: NRDB_2009_a_0007 **Name:** Inlet structure for Sluice Gate # 1 **Caption:** View of the heavy vegetation around the inlet structure for Sluice Gate # 1. Vegetation needs to be cleared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0007 **Name:** Water ponding at Sluice Gate # 1 Inlet **Caption:** View of the water ponding behind the inlet structure. This could be caused by the inlet being blocked by silt or debris. Conduit should be inspected by remote camera and cleared if necessary.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Interior Drainage System

For use during Initial and Continuing Eligibility Inspections of interior drainage systems




Inspect ID: NRDB_2009_a_0022 **Name:** Sluice Gate # 3. **Caption:** Sluice Gate #3. Gate and structure are in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0028 **Name:** Sluice Gate # 2 **Caption:** Sluice Gate Structure #2. Structure and gate are in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

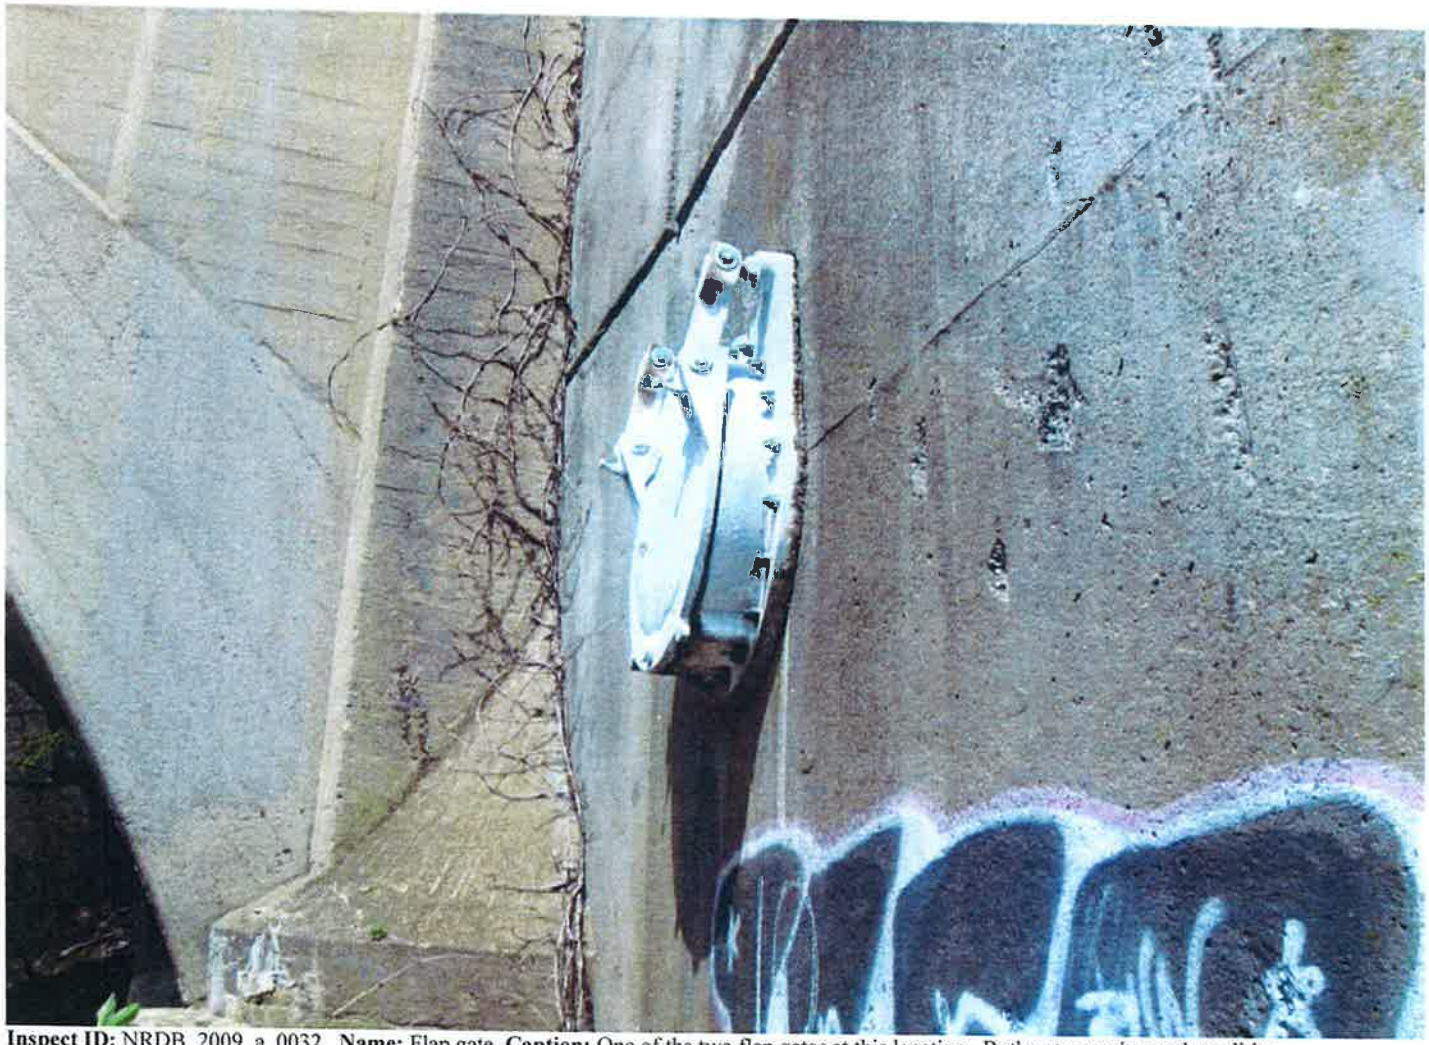

Inspect ID: NRDB_2009_a_0032 **Name:** Flap gate **Caption:** One of the two flap gates at this location. Both gates are in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Pump Stations Operating, Maintenance, Training, & Inspection Records	A	A	Operation, maintenance and inspection records are present at the pump station and are being used and updated, and personnel have been trained in pump station operations. Names and last training date shown in the record book.	
		M	Operation, maintenance and inspection records are present but not adequately used and updated.	
		U	No operation, maintenance and inspection records are present, or refresher training for personnel has not been conducted.	
2. Pump Station Operations and Maintenance Equipment Manuals	A	A	Operation and Maintenance Equipment Manuals and/or posted operating instructions are present and updated as required, and adequately cover all pertinent pump station features. O&M manuals include points of contact for manufacturers and suppliers of major equipment used in the facility.	
		M	Operation and Maintenance Equipment Manuals and/or posted operating instructions are present and adequately cover all pertinent pump station features. However, they are incomplete and the necessary updates have not been made.	
		U	Operation and Maintenance Equipment Manuals are not available.	
3. Safety Compliance	M	A	Safety compliance inspection reports by applicable local, state, or federal agencies available for review.	
		M	No safety compliance inspection reports are available for review.	
4. Communications (A or M only)	A	A	A telephone, cellular phone, two-way radio, or similar device is available to pump station operator and maintenance personnel.	
		M	A telephone, cellular phone, two-way radio, or similar device is not available to pump station operator and maintenance personnel.	
5. Plant Building	A	A	The building is in good structural condition with no major foundation settlement problems. The roof is not leaking, intake & exhaust louvers are clear of debris, fans are operational, etc.	NRDB_2009_a_0027: Derby Pump Station. Pumps and pump station are in good condition.: Continue to maintain. (A)
		M	There are minor structural defects, minimal foundation settlement, leaks, or other conditions noted that need repair. Defects do not threaten the structural integrity or stability of the building, and will not impact pumping operations.	
		U	The structural integrity or stability of the building is threatened, or there is damage to the building that threatens safety of the operator or impacts pumping operations.	
6. Fencing and Gates[1]	A	A	Fencing is in good condition and provides protection against falling or unauthorized access. Gates open and close freely, locks are in place, and there is little corrosion on metal parts.	
		M	Fencing or gates are damaged or corroded but appear to be maintainable. Locks may be missing or damaged.	
		U	Fencing and gates are damaged or corroded to the point that replacement is required, or potentially dangerous features are not secured.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		N/A	There are no features noted that require safety fencing.	
7. Pumps[1]	A	A	All pumps are properly maintained and lubricated. Systems are periodically tested and documented for review. No vibration, cavitation noises or unusual sounds are noted when the pump is operated. Bearing temperature sensor records don't indicate any problems.	
		M	Minor deficiencies noted that need to be closely monitored or repaired, such as the presence of slight vibrations, leakage of packing gland, bearing temperature sensors are inoperable or no record is present. However, the pumps are operational and are expected to perform through the next period of usage.	
		U	Major deficiencies identified that may significantly reduce pumping operations. For example, bearing sensor records indicate problems, excessive vibration noted, impellers are badly corroded, or there are eroded or missing blades.	
8. Motors, Engines, Fans, Gear Reducers, Back Stop Devices, etc.	A	A	All items are operational. Preventative maintenance and lubrication is being performed and the system is periodically subjected to performance testing. Instrumentation, alarms, bearing sensors and auto shutdowns are operational.	
		M	Systems have minor deficiencies, but are operational and will function adequately through the next flood. Bearing sensors are not operational.	
		U	One or more of the primary motors or systems is not operational, or noted deficiencies have not been corrected.	
9. Sumps / Wet well	A	A	Clear of debris, sediment, or other obstructions. Procedures are in place to remove debris accumulation during operation.	
		M	Debris, sediment, or other obstructions may be present and must be removed, but the sump/ wet well will function as intended during the next flood. Procedures are in place to remove debris accumulation during operation.	
		U	Large debris or excessive silt present which will hinder or damage pumps during operation, or no procedures established to remove debris accumulation during operation.	
10. Mechanical Operating Trash Rakes[1]	NA	A	Drive chain, bearing, gear reducers, and other components are in good operating condition and are being properly maintained.	
		M	The trash rake is in need of maintenance, but is still operational.	
		U	Trash rake not operational or deficiencies will inhibit operations during the next flood event.	
		N/A	There are no mechanical trash rakes.	
11. Non-Mechanical Trash Racks	NA	A	Trash racks are fastened in place and properly maintained.	
		M	Trash racks are in place but are unfastened or have bent bars that allow debris to enter into the pipe or pump station, bars are corroded to the point that up to 10% of the sectional area may be lost. Repair or replacement is required.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	Trash racks are missing or damaged to the extent that they are no longer functional and must be replaced. (For example, more than 10% of the sectional area may be lost.)	
		N/A	There are no trash racks, or they are covered in the pump stations section of the report.	
12. Fuel System for Pump Engines	A	A	Fuel system is operational, day tank present and operational, fuel fresh and rotated regularly.	
		M	Fuel system is operational and of adequate capacity, but day tank is missing or fuel is not fresh and rotated regularly.	
		U	Fuel system not functional.	
		N/A	No fuel system.	
13. Power Source	A	A	The normal power source and backup generators, if installed, are operational, properly exercised and well maintained. Surge protection, grounding, lightning protection, transformers, and automatic/manual transfer of main power to backup system is working.	
		M	Normal power source and backup units, if applicable, are operational with minor discrepancies or maintenance, inspection and exercising record is present but not up to date. Preventative maintenance or repairs are required.	
		U	Normal power source or generators are not operational and must be repaired; or generator, if required, is not on site.	
14. Electrical Systems[2]	A	A	Operational and maintained free of damage, corrosion, and debris. Preventative maintenance and system testing is being performed periodically.	
		M	Operational with minor discrepancies. Preventative maintenance or repairs are required, but the components are expected to function adequately during the next flood event.	
		U	Components of the electrical system will not function adequately during the next flood event and must be replaced.	
15. Megger Testing on Pump Motors and Critical Power Cables	U	A	Results of megger tests on pump motors or critical power cables show that the insulation meets manufacturer's or industry standards. Tested within the last year.	Megger testing needs to be performed annually.
		M	Megger testing not conducted within the past year. If megger tests on pump motors indicate that insulation resistance is below the manufacturer's or industry standard, but the resistance can be corrected with proper application of heat, this is minimally acceptable. (The application of heat does not relate to critical power cables.)	
		U	Megger tests not conducted within past two years, or tests indicate that insulation resistance is low enough that the equipment will not be able to meet design standards of operation; or evidence of arcing or shorting is detected visually.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
16. Enclosures, Panels, Conduit and Ducts	A	A	All enclosures, panels, conduits, and ducts are protected from corrosion damage and show no rust, damage, or deterioration that would cause a safety concern.	
		M	Minor surface corrosion which appears to be maintainable. Cleaning and painting required.	
		U	Severely corroded and must be replaced to prevent failure, equipment damage, or safety issues.	
17. Intake and Discharge Pipelines	A	A	Intake and discharge pipelines have no corrosion and paint is intact, except for minor touch up required. Pipe couplings and anchors have no leakage or corrosion.	
		M	Intake and discharge pipelines have minor corrosion and repair and painting is required. Pipe coupling with anchors have minor leakage, corrosion and require bolts to be tightened.	
		U	Intake and discharge pipelines have major corrosion and replacement is required. Pipe coupling with anchors have major leakage and is heavily corroded and requires replacement.	
18. Sluice/ Slide Gates[3]	A	A	Gates open and close freely to a tight seal or minor leakage. Gate operators are in good working condition and are properly maintained. Sill is free of sediment and other obstructions. Gates and lifters have been maintained and are free of corrosion. Documentation provided during the inspection.	
		M	Gates and/or operators have been damaged or have minor corrosion, and open and close with resistance or binding. Leakage quantity is controllable, but maintenance is required. Sill is free of sediment and other obstructions.	
		U	Gates do not open or close and/or operators do not function. Gate, stem, lifter and/or guides may be damaged or have major corrosion.	
		N/A	There are no sluice/ slide gates.	
19. Flap Gates/ Flap Valves/ Pinch Valves[1]	A	A	Gates/ valves open and close easily with minimal leakage, have no corrosion damage, and have been exercised and lubricated as required.	
		M	Gates/ valves will not fully open or close because of obstructions that can be easily removed, or have minor corrosion damage that requires maintenance.	
		U	Gates/ valves are missing, have been damaged, or have deteriorated to the point that they need to be replaced.	
		N/A	There are no gates on discharge lines from pump station.	
20. Cranes[1]	A	A	Cranes operational and have been inspected and load tested in accordance with applicable standards within the last year. Documentation is on hand.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations


Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		M	Cranes have not been inspected or operationally tested within the past year, or there are visible signs of corrosion, oil leakage, etc, requiring maintenance.	
		U	Cranes are not operational, and this may prevent the pump station from functioning as required. No documentation available on cranes.	
		N/A	There are no cranes.	
21. Other Metallic Items (Equipment, Ladders, Platform Anchors, etc)	A	A	All metal parts are protected from corrosion damage and show no rust, damage, or deterioration that would cause a safety concern.	
		M	Corrosion seen on metallic parts appears to be maintainable.	
		U	Metallic parts are severely corroded and require replacement to prevent failure, equipment damage, or safety issues.	
		N/A	There are no other significant metallic items.	

[1] Proper operation of this item must be demonstrated during the inspection.
[2] Check motor control center, circuit breakers, pilot lights, volt meters, ammeters, sump level indicator, gate position indicators, remote operating systems, including SCADA and telemetry systems. Also, check interior and exterior lighting; especially lighting near trash rack screens, ladders, walkways, etc.
[3] Proper operation of the gates (full open and closed) must be demonstrated during the inspection if no documentation is available. Be aware of both manual and electrical operators.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Pump Stations

For use during Initial and Continuing Eligibility Inspections of pump stations

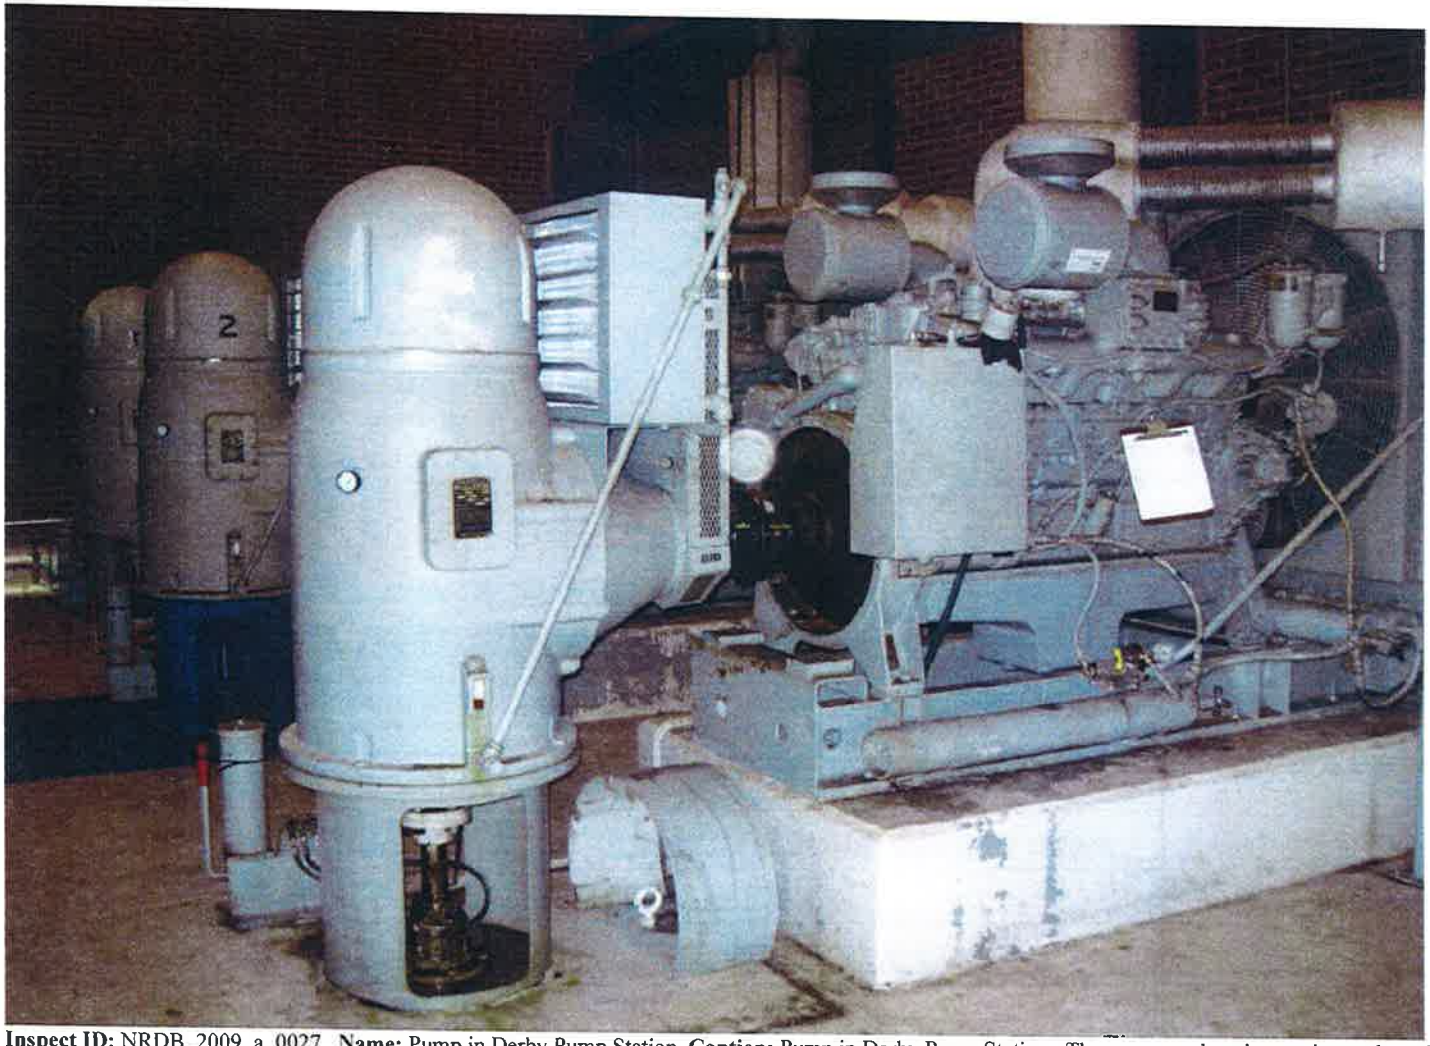

Inspect ID: NRDB_2009_a_0027 **Name:** Pump in Derby Pump Station **Caption:** Pump in Derby Pump Station. The pumps and station are in good condition.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Flood Damage Reduction Channels

For use during Initial and Continuing Eligibility Inspections of flood damage reduction channels

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
1. Vegetation and Obstructions	A	A	No obstructions, vegetation, debris, or sediment accumulation within the channel. Concrete channel joints and weep holes are free of grass and weeds.	NRDB_2009_a_0008: Minor buildup of debris and sediment along the RB of the channel.: Monitor buildup and clear if buildup continues. (M) Naugatuck River channel is generally clear of obstructions.
		M	Obstructions (including log jams), vegetation, debris, or sediment are minor and have not impaired channel flow capacity, but should be removed. Sediment shoals have not developed to the extent that they can support vegetation other than non-aquatic grasses. A limited volume of grass and weeds may be present in concrete channel joints and weep holes.	
		U	Obstructions (including log jams), vegetation, debris or sediment have impaired the channel flow capacity. Sediment shoals are well established and support woody and/or brushy vegetation. Sediment and debris removal required to re-establish flow capacity.	
2. Shoaling[1] (sediment deposition)	A	A	No shoaling or minor, non-vegetated shoaling is present.	NRDB_2009_a_0039: Shoaling noted on the far bank at this location.: Monitor sediment build up and dredge if blockage begins to impede channel flow. (M)
		M	More widespread vegetated and non-vegetated shoaling is present. Non-aquatic grasses are present on shoal. No trees or brush is present on shoal, and channel flow is not significantly reduced. Sediment and debris removal recommended.	
		U	Shoaling is well established, stabilized by saplings, brush, or other vegetation. Shoals are diverting flow to channel walls. Channel flow capacity is reduced and maintenance is required.	
3. Encroachments	A	A	No trash, debris, unauthorized structures, excavations, or other obstructions present within the easement area. Encroachments have been previously reviewed by the Corps, and it was determined that they do not diminish proper functioning of the channel.	
		M	Trash, debris, unauthorized structures, excavations, or other obstructions present, or inappropriate activities noted that should be corrected but will not inhibit operations and maintenance or emergency operations. Encroachments have not been reviewed by the Corps.	
		U	Unauthorized encroachments or inappropriate activities noted are likely to inhibit operations and maintenance, emergency operations, or negatively impact the integrity of the channel.	
4. Erosion	A	A	No head cutting or horizontal deviation observed.	
		M	Head cutting and horizontal deviation evident, but is less than 1 foot from the designed grade or cross section.	
		U	Head cutting and horizontal deviation of more than 1 foot from the designed grade or cross section. Corrective actions required to stop or slow erosion.	
5. Concrete Surfaces	NA	A	Negligible spalling, scaling or cracking. If the concrete surface is weathered or holds moisture, it is still satisfactory but should be seal coated to prevent freeze/ thaw damage.	
		M	Spalling, scaling, and open cracking present, but the immediate integrity or performance of the structure is not threatened. Reinforcing steel may be exposed. Repairs/ sealing is necessary to prevent additional damage during periods of thawing and freezing.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Flood Damage Reduction Channels

For use during Initial and Continuing Eligibility Inspections of flood damage reduction channels

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		U	Surface deterioration or deep cracks present that may result in an unreliable structure. Any surface deterioration that exposes the sheet piling or lies adjacent to monolith joints may indicate underlying reinforcement corrosion and is unacceptable.	
		N/A	There are no concrete items in the channel.	
6. Tilting, Sliding or Settlement of Concrete Structures[2]	NA	A	There are no significant areas of tilting, sliding, or settlement that would endanger the integrity of the structure.	
		M	There are areas of tilting, sliding, or settlement (either active or inactive) that need to be repaired. The maximum offset, either laterally or vertically, does not exceed 2 inches unless the movement can be shown to be no longer actively occurring. The integrity of the structure is not in danger.	
		U	There are areas of tilting, sliding, or settlement (either active or inactive) that threaten the structure's integrity and performance. Any movement that has resulted in failure of the waterstop (possibly identified by daylight visible through the joint) is unacceptable. Differential movement of greater than 2 inches between any two adjacent monoliths, either laterally or vertically, is unacceptable unless it can be shown that the movement is no longer active. Also, if the floodwall is of I-wall construction, then any visible or measurable tilting of the wall toward the protected side that has created an open horizontal crack on the riverside base of a monolith is unacceptable.	
		N/A	There are no concrete items in the channel.	
7. Foundation of Concrete Structures[3]	NA	A	No active erosion, scouring, or bank caving that might endanger the structure's stability.	
		M	There are areas where the ground is eroding towards the base of the structure. Efforts need to be taken to slow and repair this erosion, but it is not judged to be close enough to the structure or to be progressing rapidly enough to affect structural stability before the next inspection. For the purposes of inspection, the erosion or scour is not closer to the riverside face of the wall than twice the floodwall's underground base width if the wall is of L-wall or T-wall construction; or if the wall is of sheetpile or I-wall construction, the erosion is not closer than twice the wall's visible height. Additionally, rate of erosion is such that the wall is expected to remain stabile until the next inspection.	
		U	Erosion or bank caving observed that is closer to the wall than the limits described above, or is outside these limits but may lead to structural instabilities before the next inspection. Additionally, if the floodwall is of I-wall or sheetpile construction, the foundation is unacceptable if any turf, soil or pavement material got washed away from the landside of the I-wall as the result of a previous overtopping event.	
		N/A	There are no concrete items in the channel.	
8. Slab and Monolith Joints	NA	A	The joint material is in good condition. The exterior joint sealant is intact and cracking/ desiccation is minimal. Joint filler material and/or waterstop is not visible at any point.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Flood Damage Reduction Channels

For use during Initial and Continuing Eligibility Inspections of flood damage reduction channels

Rated Item	Rating	Rating Guidelines		Location/Remarks/Recommendations
		M	The joint material has appreciable deterioration to the point where joint filler material and/or waterstop is visible in some locations. This needs to be repaired or replaced to prevent spalling and cracking during freeze/ thaw cycles, and to ensure water tightness of the joint.	
		U	The joint material is severely deteriorated or the concrete adjacent to the monolith joints has spalled and cracked, damaging the waterstop; in either case damage has occurred to the point where it is apparent that the joint is no longer watertight and will not provide the intended level of protection during a flood.	
		N/A	There are no concrete items in the channel.	
9. Flap Gates/ Flap Valves/ Pinch Valves[4]	NA	A	Gates/ valves open and close easily with minimal leakage, have no corrosion damage, and have been exercised and lubricated as required.	
		M	Gates/ valves will not fully open or close because of obstructions that can be easily removed, or have minor corrosion damage that requires maintenance.	
		U	Gates/ valves are missing, have been damaged, or have deteriorated to the point that they need to be replaced.	
		N/A	There are no flap gates.	
10. Riprap Revetments & Banks	A	A	No riprap displacement or stone degradation that could pose an immediate threat to the integrity of channel bank. Riprap intact with no woody vegetation present.	
		M	Minor riprap displacement or stone degradation that could pose an immediate threat to the integrity of the channel bank. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide.	
		U	Significant riprap displacement, exposure of bedding, or stone degradation observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Rock protection is hidden by dense brush, trees, or grasses.	
		N/A	There is no riprap protecting this feature of the segment / system, or riprap is discussed in another section.	
11. Revetments other than Riprap	NA	A	Existing revetment protection is properly maintained, undamaged, and clearly visible.	
		M	Minor revetment displacement or deterioration that does not pose an immediate threat to the integrity of the levee. Unwanted vegetation must be cleared or sprayed with an appropriate herbicide.	
		U	Significant revetment displacement, deterioration, or exposure of bedding observed. Scour activity is undercutting banks, eroding embankments, or impairing channel flows by causing turbulence or shoaling. Revetment protection is hidden by dense brush and trees.	
		N/A	There are no such revetments protecting this feature of the segment / system.	

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

Flood Damage Reduction Channels

For use during Initial and Continuing Eligibility Inspections of flood damage reduction channels


[1] If weather and flow conditions allow, inspectors should walk in the channel and probe shoal areas in order to estimate extent of blockage of the cross-sectional area where shoaling is present.
[2] The sponsor should be monitoring any observed movement to verify whether the movement is active or inactive.
[3] Inspectors must have as-built drawings available during the inspection so that the lateral distance to the heel and toe of the floodwalls can be determined in the field.
[4] Proper operation of this item must be demonstrated during the inspection.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction



Inspect ID: NRDB_2009_a_0039 **Name:** Shoaling on far bank **Caption:** View of shoaling present on the far bank of the channel.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction

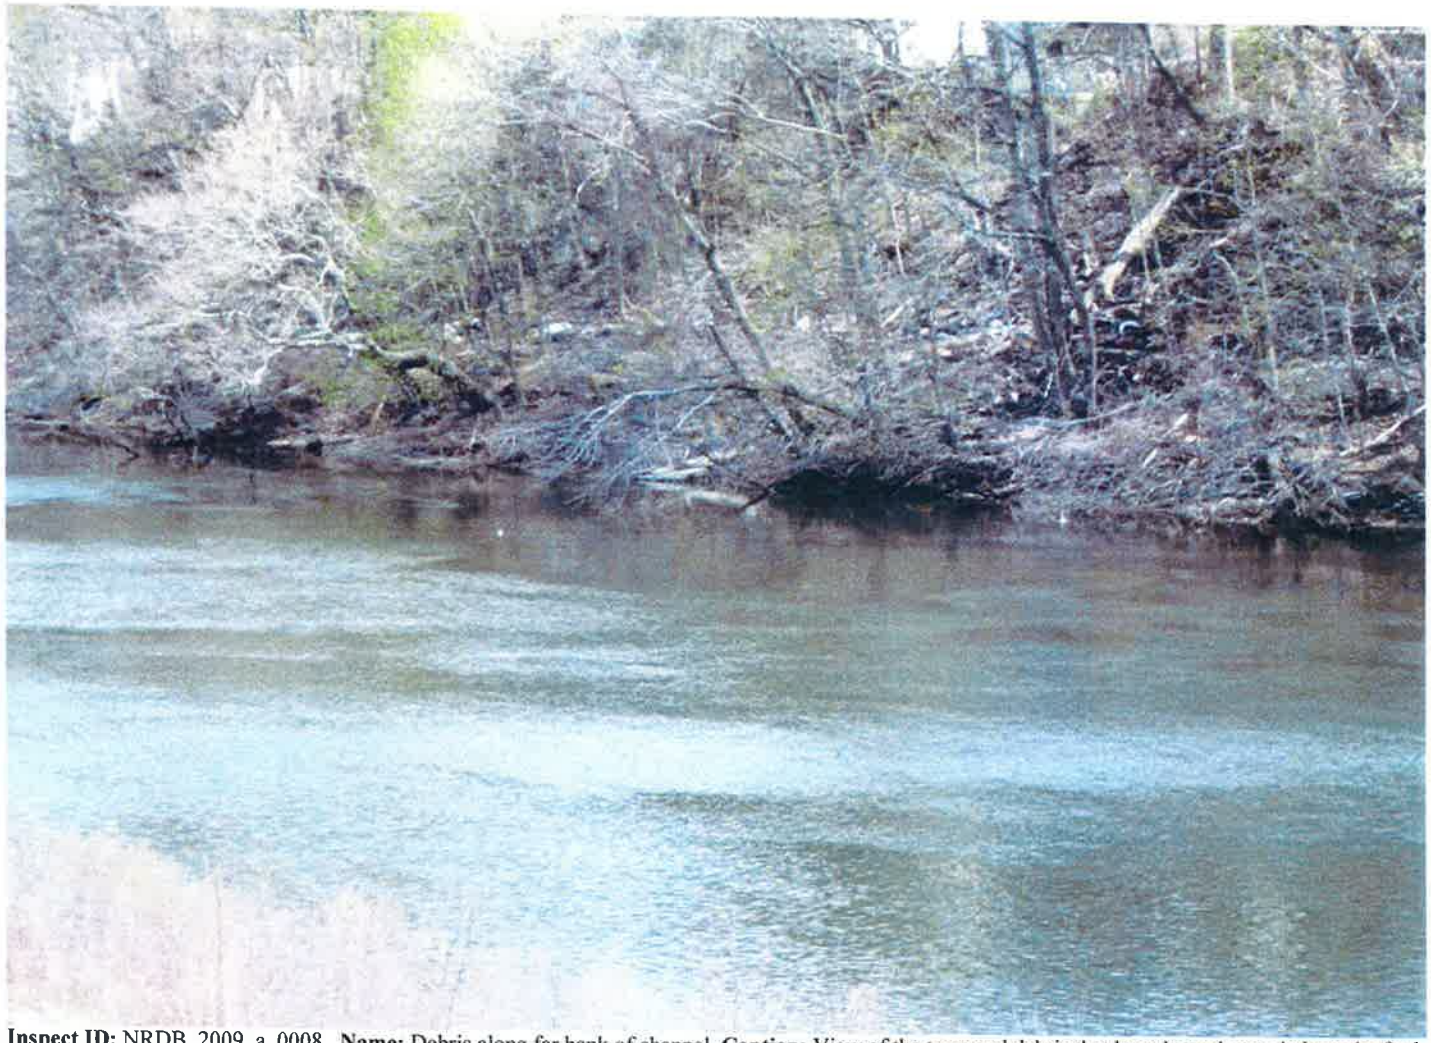

Inspect ID: NRDB_2009_a_0008 **Name:** Debris along far bank of channel **Caption:** View of the trees and debris that have been dumped along the far bank of the channel. The debris should be cleared.

Key: A = Acceptable. M = Minimally Acceptable; Maintenance is required. U = Unacceptable. N/A = Not Applicable. FDR = Flood Damage Reduction


USACE_CENAE_
USACE_GENAE_
USACE_CENAE_
USACE_CENAE_
USACE_CE
USACE_CENAE_NRD
USACE_CENAE_NRDB
USACE_CENAE_NRDB_2009_a_003
USACE_CENAE_NRDB_2
USACE_CENAE_NRDB_2009_a_
USACE_CENAE_NRDB
USACE_CENAE_NRDB_2009_a_0029
USACE_CENAE_NRDB_2009_a_0028
USACE_CENA
USACE_CE
USACE
USACE_CENAE_NRDB_2009_a_0023
USACE_CENAE_NRDB_2009_a_0021
N
W
E
S
860 430 0 860 1,720 2,

C. MUNICIPAL RESOLUTIONS

AUTHORIZING RESOLUTION OF THE

Board of Alderman – City of Derby

BE IT RESOLVED THAT

I, Anthony Staffieri, the Mayor of City of Derby, do hereby certify that on October 28, 2010, the Derby Board of Aldermen formally adopted the updated Operation & Maintenance Manual for the Housatonic River and Naugatuck River Flood Protection Works in accordance with Title 44 Chapter 1Section 65.10 of the Code of Federal Regulations (44 CFR Section 65.10).

The undersigned has executed this certificate this December 14, 2010.

Anthony Staffieri
Mayor
City of Derby

RESOLUTION

City of Ansonia

Aldermen Edward Adamowski 1st Ward
Alderman Jerome Fainer, **of the** 4th Ward **Ward, introduced the following Resolution:** Operation and Maintenance Manual for Flood Protection Works

Resolved,

Certification

Certified a true copy of a resolution adopted by the board of alderman of the City of Ansonia at a meeting held on 12/14/10 *and which has not been rescinded or modified in anyway.*

12/15/10 *Date* Madeline H. Bottone *Town and City Clerk*

Seal

WHEREAS, the City of Ansonia is part of the Housatonic River flood control in conjunction with the United States Army Corps of Engineers;

WHEREAS, the City of Ansonia, through the Department of Public Works has been delegated responsibility for the operation and maintenance of the flood protection works located along the banks of the Naugatuck River;

WHEREAS, the Housatonic Flood Control Operation and Maintenance Manual for the flood protection works for Ansonia, Connecticut and the Naugatuck River was initially adopted in May of 1973;

WHEREAS, the New England District Office of the United States Army Corps Engineer requested that the City of Ansonia revise and update the Housatonic Flood Control Operation and Maintenance Manual for the flood protection works located along the Naugatuck River in Ansonia, Connecticut;

WHEREAS, the City of Ansonia had retained Milone & MacBroom of Cheshire, Connecticut whom in ~~December~~ of 2010 submitted a revised Housatonic River Flood Control Operation and Maintenance Manual for flood protection works for Ansonia, Connecticut as it pertains to the Naugatuck River.

THEREFORE BE IT RESOLVED, the Board of Aldermen hereby approves and adopts the revised November 2010 Housatonic River Flood Control Operation and Maintenance Manual for flood protection works for Ansonia, Connecticut as it pertains to the Naugatuck River and that the Board of Aldermen hereby authorize Mayor James Della Volpe and Superintendent of Public Works Michael Schryver to sign any and all necessary documents to complete the adoption of the afore-mentioned Operation and Maintenance Manual.

Approved December 15, 2010 **Adopted** December 14, 2010

J. T. Della Volpe
Mayor

Madeline H. Bottone
City Clerk

(OVER)