

SITE ENGINEERING DESIGN REPORT

Proposed Residential Subdivision
Summit Street
Derby, Connecticut
Job No. 2508

Prepared For:
Summit Hill, LLC

Prepared By:



June 25, 2026

Manuel J. Silva
Project Manager

TABLE OF CONTENTS

SECTION	PAGE
Introduction	1
Existing Storm Water Runoff	2
Proposed Storm Water Drainage	3
Sanitary Sewer	5
Other Utilities	5
TABLES	
Table 1	2
Table 2	4
Appendix A	Storm Water Hydrographs
Appendix B	Drainage Area Maps, Existing & Proposed Conditions
Appendix C	Water quality Volume Calcs
Appendix D	Storm sewer Calcs with Gutter flow analysis

INTRODUCTION:

Summit Hill, LLC is proposing the construction of 34 new residential duplex houses and 5 single-family detached dwellings on the two parcels totaling 17.725 acres at the end of Summit Street. The majority of the proposed dwellings will have a total floor area of approximately 2,080 square feet, distributed over two (2) stories.

Currently, the property is made up of 2 parcels. The entire site in general is a wooded area with little understory with some rock outcrops.

The stormwater runoff from the site flows in three directions: southwest to Coon Hollow Brook, which flows southerly and connects to an unnamed canal to the Housatonic River. To the northeast, where water flows to a tributary to the Naugatuck River that starts near Spring and Mohawk Ave. The southeast portion of the site flows southeast towards a tributary of the Naugatuck river which starts near the east end of Fall Street.

This site has an existing accessway to Summit Street. Two roadways are proposed for this development accessing Summit Street and Mountain Street in Derby. Upon completion of the development, garage parking will be provided for 78 cars; these spaces will be garage spaces located in the single houses 2-car garages, and the on car garage for each duplex unit.

EXISTING STORMWATER RUNOFF

For analysis purposes, the site has been examined as having four drainage areas. These four drainage areas will be referred to as DA-1 & DA-2(South west, North West drainage area flowing to Coon Hollow Brook), and DA-3 & DA-4 (North East and south East drainage area flowing to Mountain Street, and Fall Street).

Based on the above, it is apparent that there is three points of interest associated with the existing drainage pattern, the point immediately prior to the southwesterly portion of the property to a Coon Hollow Brook, where the site drains, and the two point immediately prior to the Northeasterly and southwesterly portions of the property. Peak rates of stormwater runoff, for 2, 10, 25, 50 and 100-year storm events, have been calculated for this point of interest. The rates are depicted on Table 1. The supporting calculations are included as Appendix A.

These existing flows will later be compared to post-development flows as a means of assessing the potential flow impact on surrounding infrastructures.

TABLE 1
Existing Flows (CFS)

Drainage Area	Existing Runoff from the western watershed area to be developed				
	2-Yr	10-Yr	25-Yr	50-Yr	100-Yr
DA-1 S. West	6.51	12.68	16.62	19.58	22.77
DA-2 N.West	3.99	7.71	10.09	11.87	13.79
WEST TOTAL	9.97	19.44	25.51	30.08	35.00

Existing Runoff from the eastern watershed area to be developed

DA-3 N. East	9.03	17.54	22.97	27.06	31.45
DA-4 S. East	8.96	17.41	22.81	26.87	31.23

PROPOSED STORM WATER DRAINAGE

The plans are designed to minimize potential impacts to adjacent properties and the existing stormwater infrastructure.

Without stormwater quality measures, the proposed development of this site will increase the Weighted Runoff Coefficient (WRC) and decrease the Time of Concentration (T_c), resulting in an increase in the peak rate of stormwater runoff. However, the construction of two (2) Storm Water Management Areas (SWMA) actually reduces the post-development rate of runoff relative to predevelopment conditions.

Design details for these systems are presented on Sheet SP-2 (part of the overall Project Documents). The system will drain the Roads, sidewalks, and grassy areas associated with the 34 new residential duplex houses and 5-single-family detached homes development. The Roads will be the major elements of the total impervious area on the site. (calculations included as Appendix A, Gutter flow analysis included as Appendix B) The roof, grassy areas, sidewalks, and driveways will contribute to the runoff totals seen in Table 2. The Roofs and driveways will be controlled by separate individual systems on each lot designed at a later time when the house's final layouts are known.

WEST POND

The Southwest Pond receives runoff from DA-1A, DA-2A, DA-3C and DA-4A. The basin provides approximately 100,937 cubic feet of storage with a maximum design depth of approximately 14.5 feet. Outlet control is provided through a low-flow outlet structure and an emergency overflow weir. The 100-year routed discharge from the pond is approximately 13.71 cfs.

NORTH SYSTEM

The North System receives runoff from DA-3A and consists of six rows of underground concrete chamber galleries approximately 100 feet in length. Total available storage is approximately 14,576 cubic feet. The system attenuates runoff from the northeastern drainage area before discharge to the downstream drainage network.

As indicated in the following summary and attached computations, the proposed development will reduce the peak rate of runoff to less than the pre-developed condition for all the water shed areas, Northwest, South West, Northeast, and Southeast on-site.

The development as proposed, will not have an adverse impact on the surrounding wetlands or watercourses.

Table 2, (below) represents the combined effect of these flow patterns on the existing infrastructures. Flows from the proposed systems will produce peak flows that are less than the existing peak flows from the two watersheds on the site.

TABLE 2

Drainage Area	Proposed Flows (CFS) for new condition				
	Proposed Runoff from the western watershed area to be developed				
	2-Yr	10-Yr	25-Yr	50-Yr	100-Yr
WEST TOTAL	3.193	5.924	7.511	8.677	15.55
Percent reduction	-67.97%	-69.53%	-70.56%	-71.15%	-55.57%
Proposed Runoff from the eastern watershed area to be developed					
DA-3A N.East from galleries	7.92	15.71	20.45	23.91	27.58
Percent reduction	-12.29%	-10.43%	-10.97%	-11.64%	-12.31%
DA-4-B S.East	6.912	13.36	17.47	20.56	23.88
Percent reduction	-22.86%	-23.26%	-23.41%	-23.48%	-23.54%

SANITARY SEWER

Sanitary Sewer discharge will be through a proposed 8-inch PVC sanitary sewer line to the existing sewer main in Summit Street.

Using the technical standards of the Connecticut Public Health Code, the estimated sewage flow is 150 gallons per day per bedroom. This development will have no more than 219 bedrooms :

34 lots have 6 bedrooms + 5 lots have 3 bedrooms

$(34 \times 6) + (5 \times 3) = 219$ total bedrooms

$219 \times 150 = 32,850$ gallons per day average flow

Average Daily Flow = 22.8 gpm per phase

Peak flow estimate = 22.8×5 (peaking factor) = 114

= 114gpm Peak or 0.25 cfs

Other Utilities

All proposed utilities to the site will be through underground utility connections. Electrical service will be from existing aboveground electric utility line in proposed streets. Water service will be from an existing water main in the proposed streets.

APPENDIX A

STAGE HYDROGRAPHS

Table of Contents

Project Name: Summitt St Derby
File: Drairage Calcs.hys

Hydrology Studio v 3.0.0.44

06-26-2026

Basin Model Schematic	1
Hydrograph by Return Period	2
2 - Year	
Hydrograph Summary	3
Hydrograph Reports	
Design Storm Report - NOAA-D, 24-hr	4
10 - Year	
Hydrograph Summary	5
Hydrograph Reports	
Design Storm Report - NOAA-D, 24-hr	6
25 - Year	
Hydrograph Summary	7
Hydrograph Reports	
Design Storm Report - NOAA-D, 24-hr	8
50 - Year	
Hydrograph Summary	9
Hydrograph Reports	
Design Storm Report - NOAA-D, 24-hr	10
100 - Year	
Hydrograph Summary	11
Hydrograph Reports	
Design Storm Report - NOAA-D, 24-hr	12
IDF Report	13
Precipitation Report	14

Basin Model

Hydrology Studio v 3.0.0.44

Project Name: Summitt St Derby

File: Drainage Calcs.hys

06-26-2026



Hydrograph by Return Period

Hydrology Studio v 3.0.0.44

Project Name: Sumitt St Derby

File: Drairage Calcs.hys

06-26-2026

Hyd. No.	Hydrograph Type	Hydrograph Name	Peak Outflow (cfs)							
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr
1	NRCS Runoff	Pre DA-1		6.512			12.68	16.62	19.58	22.77
2	NRCS Runoff	Pre DA-2		3.987			7.713	10.09	11.87	13.79
3	NRCS Runoff	Pre DA-3 NORTH EAST		9.025			17.54	22.97	27.06	31.45
4	NRCS Runoff	Pre DA-4 SOUTH EAST		8.956			17.41	22.81	26.87	31.23
5	NRCS Runoff	Post DA-1-A		7.913			15.01	19.50	22.87	26.48
6	NRCS Runoff	Post DA-1-B		1.278			2.470	3.230	3.800	4.414
7	NRCS Runoff	Post DA-2-A		3.574			6.780	8.810	10.33	11.96
8	NRCS Runoff	Post DA-2-B		1.037			2.005	2.622	3.085	3.583
9	NRCS Runoff	Post DA-3-A		4.497			8.181	10.48	12.20	14.05
10	NRCS Runoff	Post DA-3-B		7.292			13.94	18.16	21.32	24.72
11	NRCS Runoff	Post DA-3-C		1.217			2.252	2.903	3.390	3.912
12	NRCS Runoff	Post DA-4-A		5.939			10.52	13.36	15.48	17.75
13	NRCS Runoff	Post DA-4-B SOUTH EAST		6.912			13.36	17.47	20.56	23.88
14	Junction	Pre WEST TOTAL		9.969			19.44	25.51	30.08	35.00
15	Junction	Post TO WEST POND		18.64			34.56	44.58	52.07	60.11
16	Pond Route	Post FROM WEST POND		1.304			1.828	2.052	5.627	13.83
17	Junction	Post WEST BYPASS TOTAL		2.315			4.475	5.852	6.885	7.996
18	Junction	Post WEST TOTAL		3.193			5.924	7.511	8.677	15.67
19	Pond Route	Post FROM NORTH SYSTEM		0.835			2.229	2.766	4.018	9.108
20	Junction	Post NORTH EAST TOTAL		7.292			15.71	20.45	23.91	27.58

Hydrograph 2-yr Summary

Hydrology Studio v 3.0.0.44

Project Name: Summitt St Derby

File: Drairage Calcs.hys


06-26-2026

Hyd. No.	Hydrograph Type	Hydrograph Name	Peak Flow (cfs)	Time to Peak (hrs)	Hydrograph Volume (cuft)	Inflow Hyd(s)	Maximum Elevation (ft)	Maximum Storage (cuft)
1	NRCS Runoff	Pre DA-1	6.512	12.20	26,416	---		
2	NRCS Runoff	Pre DA-2	3.987	12.13	12,984	---		
3	NRCS Runoff	Pre DA-3 NORTH EAST	9.025	12.17	33,396	---		
4	NRCS Runoff	Pre DA-4 SOUTH EAST	8.956	12.18	34,451	---		
5	NRCS Runoff	Post DA-1-A	7.913	12.12	24,458	---		
6	NRCS Runoff	Post DA-1-B	1.278	12.12	3,948	---		
7	NRCS Runoff	Post DA-2-A	3.574	12.12	11,048	---		
8	NRCS Runoff	Post DA-2-B	1.037	12.12	3,204	---		
9	NRCS Runoff	Post DA-3-A	4.497	12.12	13,959	---		
10	NRCS Runoff	Post DA-3-B	7.292	12.12	22,532	---		
11	NRCS Runoff	Post DA-3-C	1.217	12.12	3,767	---		
12	NRCS Runoff	Post DA-4-A	5.939	12.12	18,545	---		
13	NRCS Runoff	Post DA-4-B SOUTH EAST	6.912	12.12	21,356	---		
14	Junction	Pre WEST TOTAL	9.969	12.17	39,400	1, 2		
15	Junction	Post TO WEST POND	18.64	12.12	57,818	5, 7, 11, 12		
16	Pond Route	Post FROM WEST POND	1.304	13.62	50,149	15	180.96	31,188
17	Junction	Post WEST BYPASS TOTAL	2.315	12.12	7,152	6, 8		
18	Junction	Post WEST TOTAL	3.193	12.13	57,301	16, 17		
19	Pond Route	Post FROM NORTH SYSTEM	0.835	12.57	9,123	9	226.23	6,515
20	Junction	Post NORTH EAST TOTAL	7.292	12.12	31,655	10, 19		

Storm Distribution: NOAA-D, 24-hr

Storm Duration	Total Rainfall Volume (in)								
	1-yr	✓ 2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
24 hrs	3.01	3.67	0.00	4.75	5.65	6.88	7.80	8.79	

Incremental Rainfall Distribution, 2-yr									
Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)
11.60	0.011071	11.78	0.015983	11.97	0.038259	12.15	0.022178	12.33	0.011653
11.62	0.011652	11.80	0.015984	11.98	0.038261	12.17	0.022178	12.35	0.011652
11.63	0.011652	11.82	0.022178	12.00	0.038258	12.18	0.022180	12.37	0.011653
11.65	0.011653	11.83	0.022180	12.02	0.063838	12.20	0.022178	12.38	0.011652
11.67	0.011652	11.85	0.022179	12.03	0.063842	12.22	0.015983	12.40	0.011653
11.68	0.011653	11.87	0.022178	12.05	0.063838	12.23	0.015983	12.42	0.011071
11.70	0.011652	11.88	0.022180	12.07	0.063842	12.25	0.015983	12.43	0.011072
11.72	0.015983	11.90	0.022179	12.08	0.063838	12.27	0.015982	12.45	0.011071
11.73	0.015983	11.92	0.038261	12.10	0.063842	12.28	0.015983	12.47	0.011071
11.75	0.015982	11.93	0.038259	12.12	0.022178	12.30	0.015982	12.48	0.011072
11.77	0.015983	11.95	0.038261	12.13	0.022180	12.32	0.011652	12.50	0.011071

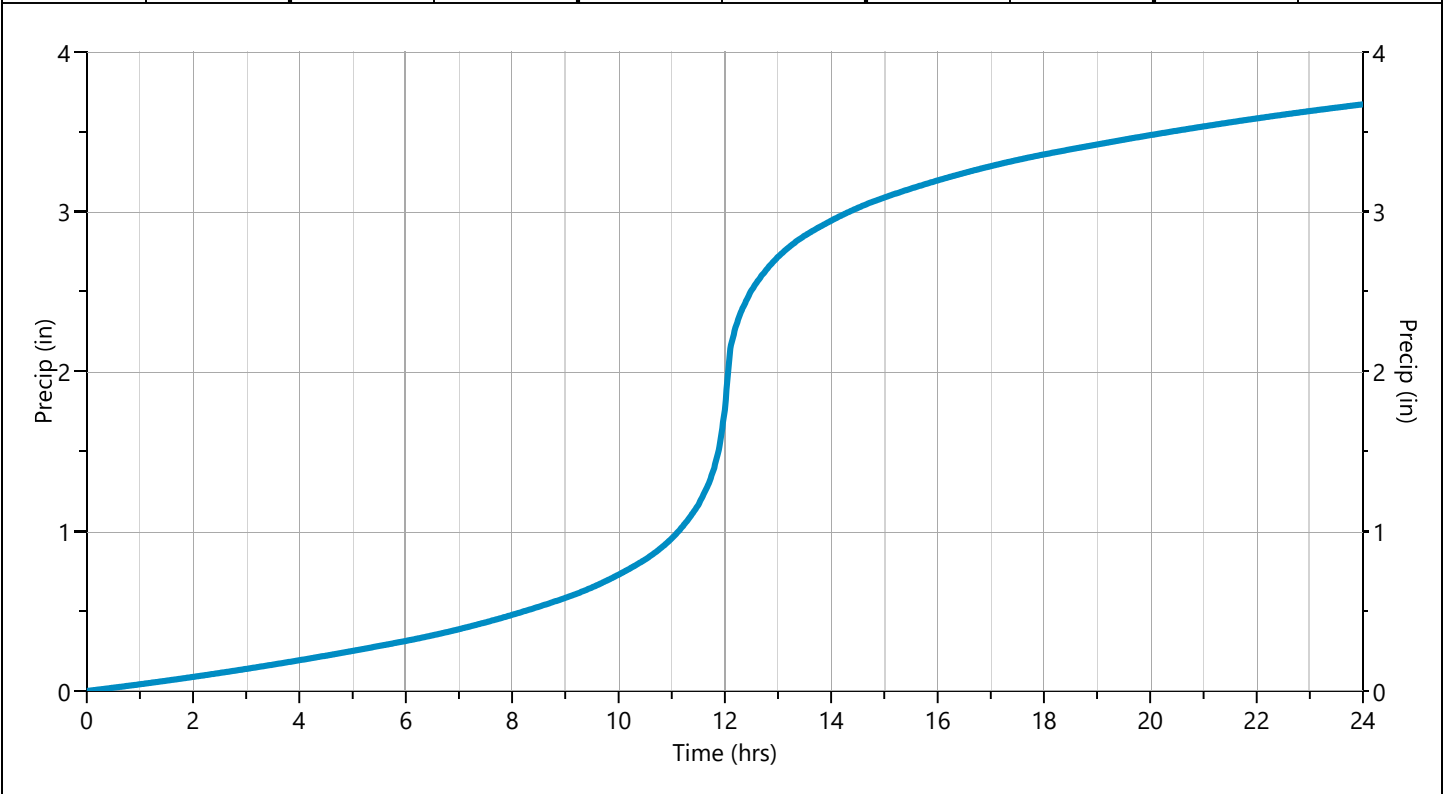

Hydrograph 10-yr Summary

Hydrology Studio v 3.0.0.44

Project Name: Summitt St Derby

File: Drainage Calcs.hys


06-26-2026

Hyd. No.	Hydrograph Type	Hydrograph Name	Peak Flow (cfs)	Time to Peak (hrs)	Hydrograph Volume (cuft)	Inflow Hyd(s)	Maximum Elevation (ft)	Maximum Storage (cuft)
1	NRCS Runoff	Pre DA-1	12.68	12.20	51,675	---		
2	NRCS Runoff	Pre DA-2	7.713	12.13	25,400	---		
3	NRCS Runoff	Pre DA-3 NORTH EAST	17.54	12.17	65,331	---		
4	NRCS Runoff	Pre DA-4 SOUTH EAST	17.41	12.18	67,394	---		
5	NRCS Runoff	Post DA-1-A	15.01	12.12	47,108	---		
6	NRCS Runoff	Post DA-1-B	2.470	12.12	7,722	---		
7	NRCS Runoff	Post DA-2-A	6.780	12.12	21,280	---		
8	NRCS Runoff	Post DA-2-B	2.005	12.12	6,269	---		
9	NRCS Runoff	Post DA-3-A	8.181	12.12	25,972	---		
10	NRCS Runoff	Post DA-3-B	13.94	12.12	43,672	---		
11	NRCS Runoff	Post DA-3-C	2.252	12.12	7,113	---		
12	NRCS Runoff	Post DA-4-A	10.52	12.12	33,728	---		
13	NRCS Runoff	Post DA-4-B SOUTH EAST	13.36	12.12	41,778	---		
14	Junction	Pre WEST TOTAL	19.44	12.15	77,075	1, 2		
15	Junction	Post TO WEST POND	34.56	12.12	109,229	5, 7, 11, 12		
16	Pond Route	Post FROM WEST POND	1.828	14.23	101,491	15	184.79	64,072
17	Junction	Post WEST BYPASS TOTAL	4.475	12.12	13,991	6, 8		
18	Junction	Post WEST TOTAL	5.924	12.12	115,482	16, 17		
19	Pond Route	Post FROM NORTH SYSTEM	2.229	12.35	21,136	9	227.74	10,916
20	Junction	Post NORTH EAST TOTAL	15.71	12.12	64,809	10, 19		

Storm Distribution: NOAA-D, 24-hr

Storm Duration	Total Rainfall Volume (in)								
	1-yr	2-yr	3-yr	5-yr	✓ 10-yr	25-yr	50-yr	100-yr	
24 hrs	3.01	3.67	0.00	4.75	5.65	6.88	7.80	8.79	

Incremental Rainfall Distribution, 10-yr									
Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)
11.60	0.017044	11.78	0.024605	11.97	0.058900	12.15	0.034144	12.33	0.017939
11.62	0.017939	11.80	0.024608	11.98	0.058903	12.17	0.034144	12.35	0.017938
11.63	0.017938	11.82	0.034144	12.00	0.058899	12.18	0.034146	12.37	0.017940
11.65	0.017939	11.83	0.034146	12.02	0.098279	12.20	0.034144	12.38	0.017938
11.67	0.017938	11.85	0.034144	12.03	0.098285	12.22	0.024606	12.40	0.017940
11.68	0.017940	11.87	0.034144	12.05	0.098279	12.23	0.024605	12.42	0.017044
11.70	0.017938	11.88	0.034146	12.07	0.098284	12.25	0.024606	12.43	0.017045
11.72	0.024605	11.90	0.034144	12.08	0.098279	12.27	0.024605	12.45	0.017044
11.73	0.024606	11.92	0.058903	12.10	0.098285	12.28	0.024607	12.47	0.017044
11.75	0.024605	11.93	0.058900	12.12	0.034144	12.30	0.024605	12.48	0.017045
11.77	0.024606	11.95	0.058903	12.13	0.034146	12.32	0.017938	12.50	0.017044

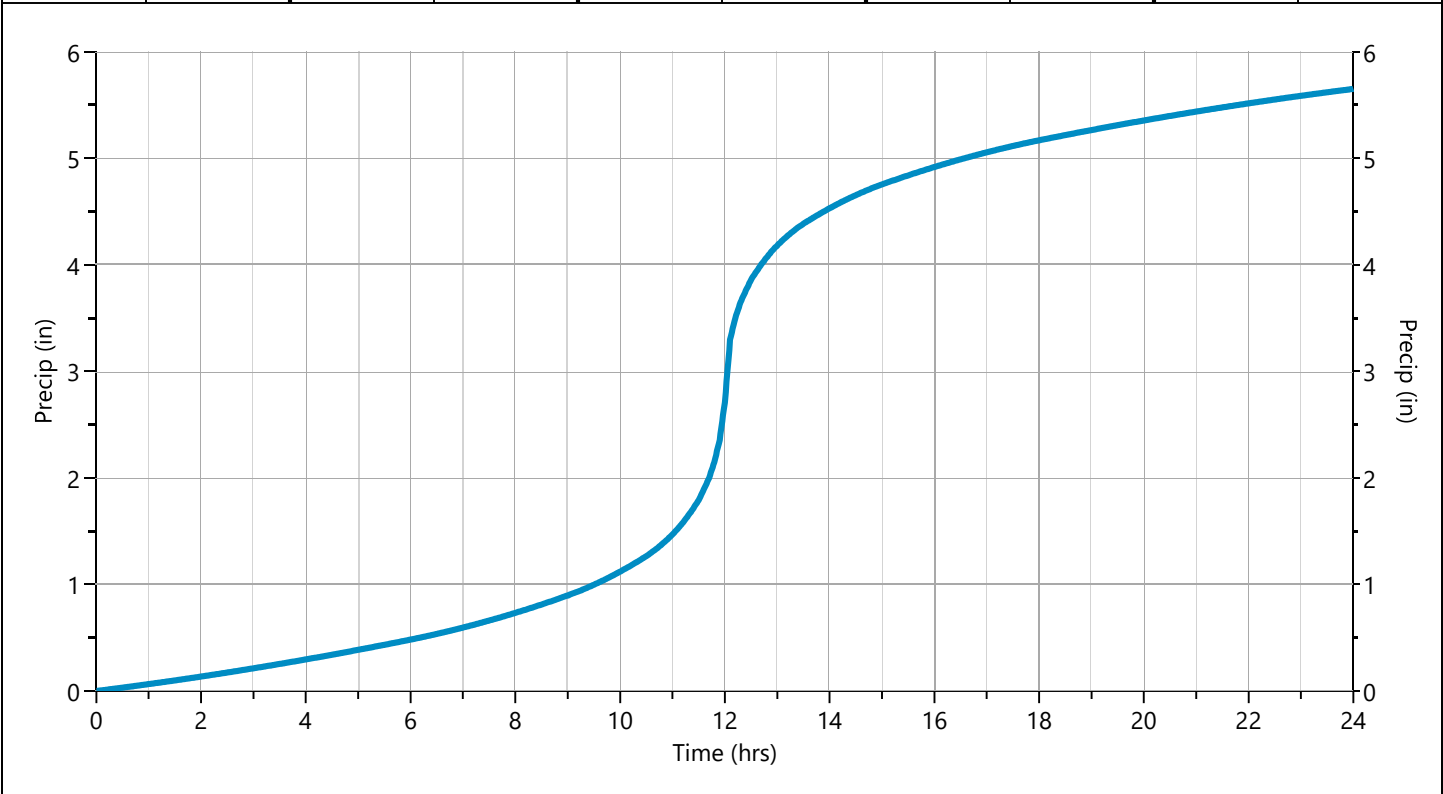

Hydrograph 25-yr Summary

Hydrology Studio v 3.0.0.44

Project Name: Summitt St Derby

File: Drainage Calcs.hys


06-26-2026

Hyd. No.	Hydrograph Type	Hydrograph Name	Peak Flow (cfs)	Time to Peak (hrs)	Hydrograph Volume (cuft)	Inflow Hyd(s)	Maximum Elevation (ft)	Maximum Storage (cuft)
1	NRCS Runoff	Pre DA-1	16.62	12.20	68,321	---		
2	NRCS Runoff	Pre DA-2	10.09	12.13	33,582	---		
3	NRCS Runoff	Pre DA-3 NORTH EAST	22.97	12.17	86,376	---		
4	NRCS Runoff	Pre DA-4 SOUTH EAST	22.81	12.18	89,103	---		
5	NRCS Runoff	Post DA-1-A	19.50	12.12	61,949	---		
6	NRCS Runoff	Post DA-1-B	3.230	12.12	10,210	---		
7	NRCS Runoff	Post DA-2-A	8.810	12.12	27,984	---		
8	NRCS Runoff	Post DA-2-B	2.622	12.12	8,288	---		
9	NRCS Runoff	Post DA-3-A	10.48	12.12	33,746	---		
10	NRCS Runoff	Post DA-3-B	18.16	12.12	57,556	---		
11	NRCS Runoff	Post DA-3-C	2.903	12.12	9,289	---		
12	NRCS Runoff	Post DA-4-A	13.36	12.12	43,478	---		
13	NRCS Runoff	Post DA-4-B SOUTH EAST	17.47	12.12	55,236	---		
14	Junction	Pre WEST TOTAL	25.51	12.15	101,903	1, 2		
15	Junction	Post TO WEST POND	44.58	12.12	142,699	5, 7, 11, 12		
16	Pond Route	Post FROM WEST POND	2.052	14.55	134,881	15	186.81	86,512
17	Junction	Post WEST BYPASS TOTAL	5.852	12.12	18,498	6, 8		
18	Junction	Post WEST TOTAL	7.511	12.12	153,379	16, 17		
19	Pond Route	Post FROM NORTH SYSTEM	2.766	12.35	28,910	9	228.69	13,678
20	Junction	Post NORTH EAST TOTAL	20.45	12.12	86,466	10, 19		

Storm Distribution: NOAA-D, 24-hr

Storm Duration	Total Rainfall Volume (in)								
	1-yr	2-yr	3-yr	5-yr	10-yr	✓ 25-yr	50-yr	100-yr	
24 hrs	3.01	3.67	0.00	4.75	5.65	6.88	7.80	8.79	

Incremental Rainfall Distribution, 25-yr									
Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)
11.60	0.020754	11.78	0.029962	11.97	0.071722	12.15	0.041577	12.33	0.021845
11.62	0.021844	11.80	0.029965	11.98	0.071726	12.17	0.041577	12.35	0.021843
11.63	0.021844	11.82	0.041577	12.00	0.071721	12.18	0.041580	12.37	0.021845
11.65	0.021845	11.83	0.041579	12.02	0.119675	12.20	0.041577	12.38	0.021843
11.67	0.021843	11.85	0.041577	12.03	0.119681	12.22	0.029963	12.40	0.021845
11.68	0.021845	11.87	0.041577	12.05	0.119675	12.23	0.029962	12.42	0.020754
11.70	0.021843	11.88	0.041579	12.07	0.119681	12.25	0.029963	12.43	0.020755
11.72	0.029962	11.90	0.041577	12.08	0.119674	12.27	0.029962	12.45	0.020754
11.73	0.029963	11.92	0.071725	12.10	0.119681	12.28	0.029963	12.47	0.020754
11.75	0.029962	11.93	0.071722	12.12	0.041577	12.30	0.029961	12.48	0.020756
11.77	0.029963	11.95	0.071726	12.13	0.041579	12.32	0.021843	12.50	0.020754

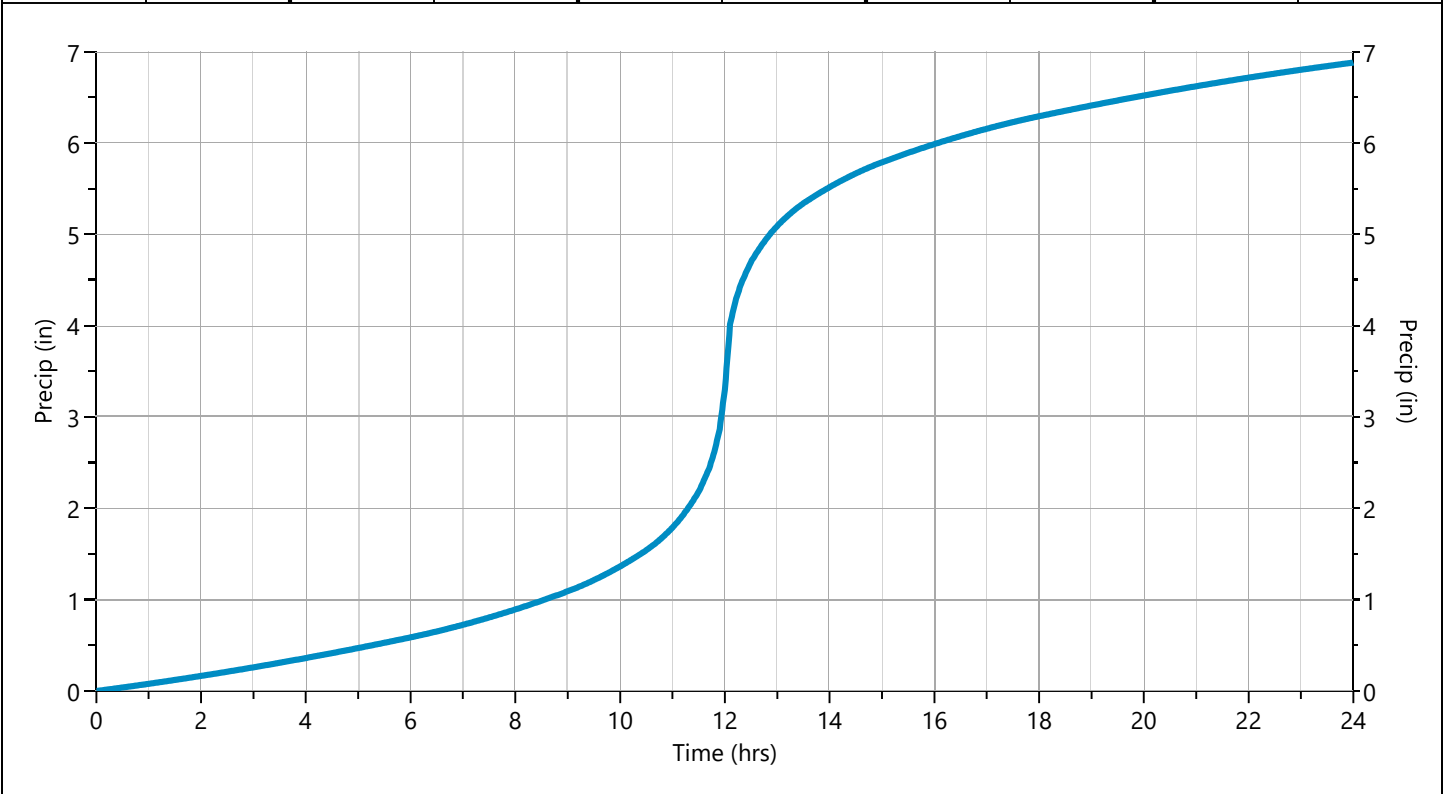

Hydrograph 50-yr Summary

Hydrology Studio v 3.0.0.44

Project Name: Summitt St Derby

File: Drainage Calcs.hys


06-26-2026

Hyd. No.	Hydrograph Type	Hydrograph Name	Peak Flow (cfs)	Time to Peak (hrs)	Hydrograph Volume (cuft)	Inflow Hyd(s)	Maximum Elevation (ft)	Maximum Storage (cuft)
1	NRCS Runoff	Pre DA-1	19.58	12.20	81,049	---		
2	NRCS Runoff	Pre DA-2	11.87	12.13	39,838	---		
3	NRCS Runoff	Pre DA-3 NORTH EAST	27.06	12.17	102,467	---		
4	NRCS Runoff	Pre DA-4 SOUTH EAST	26.87	12.18	105,703	---		
5	NRCS Runoff	Post DA-1-A	22.87	12.12	73,270	---		
6	NRCS Runoff	Post DA-1-B	3.800	12.12	12,112	---		
7	NRCS Runoff	Post DA-2-A	10.33	12.12	33,098	---		
8	NRCS Runoff	Post DA-2-B	3.085	12.12	9,832	---		
9	NRCS Runoff	Post DA-3-A	12.20	12.12	39,648	---		
10	NRCS Runoff	Post DA-3-B	21.32	12.12	68,157	---		
11	NRCS Runoff	Post DA-3-C	3.390	12.12	10,944	---		
12	NRCS Runoff	Post DA-4-A	15.48	12.12	50,858	---		
13	NRCS Runoff	Post DA-4-B SOUTH EAST	20.56	12.12	65,526	---		
14	Junction	Pre WEST TOTAL	30.08	12.15	120,887	1, 2		
15	Junction	Post TO WEST POND	52.07	12.12	168,169	5, 7, 11, 12		
16	Pond Route	Post FROM WEST POND	5.627	13.00	160,306	15	187.51	94,982
17	Junction	Post WEST BYPASS TOTAL	6.885	12.12	21,944	6, 8		
18	Junction	Post WEST TOTAL	8.677	12.12	182,250	16, 17		
19	Pond Route	Post FROM NORTH SYSTEM	4.018	12.28	34,812	9	229.54	15,366
20	Junction	Post NORTH EAST TOTAL	23.91	12.12	102,969	10, 19		

Storm Distribution: NOAA-D, 24-hr

Storm Duration	Total Rainfall Volume (in)							
	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	✓ 50-yr	100-yr
24 hrs	3.01	3.67	0.00	4.75	5.65	6.88	7.80	8.79

Incremental Rainfall Distribution, 50-yr									
Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)
11.60	0.023529	11.78	0.033968	11.97	0.081313	12.15	0.047137	12.33	0.024766
11.62	0.024765	11.80	0.033972	11.98	0.081318	12.17	0.047137	12.35	0.024765
11.63	0.024765	11.82	0.047137	12.00	0.081311	12.18	0.047140	12.37	0.024766
11.65	0.024766	11.83	0.047139	12.02	0.135678	12.20	0.047137	12.38	0.024764
11.67	0.024764	11.85	0.047137	12.03	0.135685	12.22	0.033969	12.40	0.024766
11.68	0.024766	11.87	0.047137	12.05	0.135678	12.23	0.033968	12.42	0.023530
11.70	0.024764	11.88	0.047139	12.07	0.135685	12.25	0.033970	12.43	0.023531
11.72	0.033968	11.90	0.047137	12.08	0.135677	12.27	0.033968	12.45	0.023530
11.73	0.033970	11.92	0.081317	12.10	0.135685	12.28	0.033970	12.47	0.023529
11.75	0.033968	11.93	0.081313	12.12	0.047137	12.30	0.033967	12.48	0.023531
11.77	0.033970	11.95	0.081318	12.13	0.047140	12.32	0.024764	12.50	0.023530

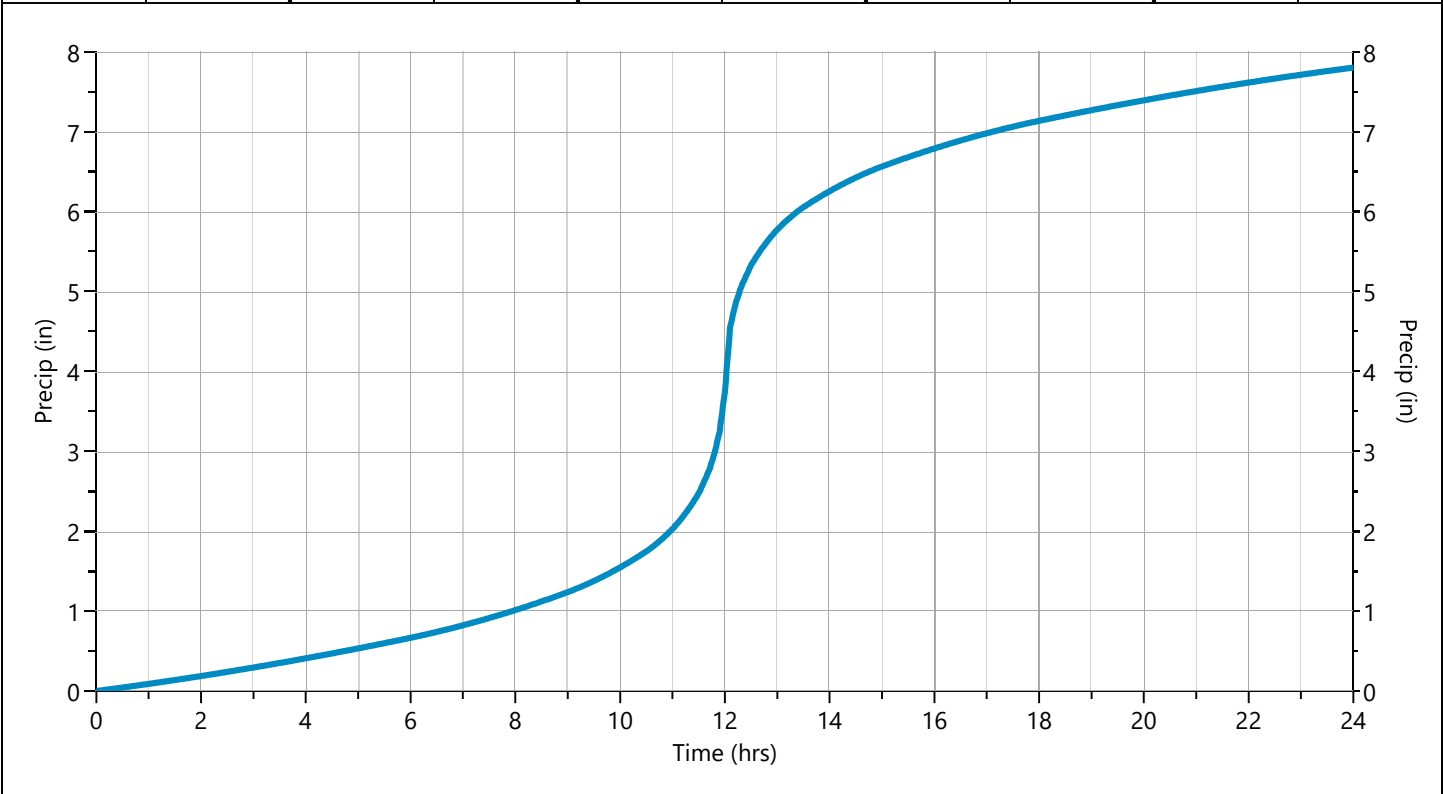

Hydrograph 100-yr Summary

Hydrology Studio v 3.0.0.44

Project Name: Summitt St Derby

File: Drainage Calcs.hys


06-26-2026

Hyd. No.	Hydrograph Type	Hydrograph Name	Peak Flow (cfs)	Time to Peak (hrs)	Hydrograph Volume (cuft)	Inflow Hyd(s)	Maximum Elevation (ft)	Maximum Storage (cuft)
1	NRCS Runoff	Pre DA-1	22.77	12.20	94,932	---		
2	NRCS Runoff	Pre DA-2	13.79	12.13	46,663	---		
3	NRCS Runoff	Pre DA-3 NORTH EAST	31.45	12.17	120,019	---		
4	NRCS Runoff	Pre DA-4 SOUTH EAST	31.23	12.18	123,809	---		
5	NRCS Runoff	Post DA-1-A	26.48	12.12	85,601	---		
6	NRCS Runoff	Post DA-1-B	4.414	12.12	14,186	---		
7	NRCS Runoff	Post DA-2-A	11.96	12.12	38,668	---		
8	NRCS Runoff	Post DA-2-B	3.583	12.12	11,516	---		
9	NRCS Runoff	Post DA-3-A	14.05	12.12	46,056	---		
10	NRCS Runoff	Post DA-3-B	24.72	12.12	79,710	---		
11	NRCS Runoff	Post DA-3-C	3.912	12.12	12,744	---		
12	NRCS Runoff	Post DA-4-A	17.75	12.12	58,856	---		
13	NRCS Runoff	Post DA-4-B SOUTH EAST	23.88	12.12	76,750	---		
14	Junction	Pre WEST TOTAL	35.00	12.15	141,595	1, 2		
15	Junction	Post TO WEST POND	60.11	12.12	195,869	5, 7, 11, 12		
16	Pond Route	Post FROM WEST POND	13.83	12.40	187,984	15	187.64	96,558
17	Junction	Post WEST BYPASS TOTAL	7.996	12.12	25,703	6, 8		
18	Junction	Post WEST TOTAL	15.67	12.40	213,687	16, 17		
19	Pond Route	Post FROM NORTH SYSTEM	9.108	12.18	41,220	9	229.90	15,893
20	Junction	Post NORTH EAST TOTAL	27.58	12.12	120,931	10, 19		

Storm Distribution: NOAA-D, 24-hr

Storm Duration	Total Rainfall Volume (in)							
	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	✓ 100-yr
24 hrs	3.01	3.67	0.00	4.75	5.65	6.88	7.80	8.79

Incremental Rainfall Distribution, 100-yr									
Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)	Time (hrs)	Precip (in)
11.60	0.026516	11.78	0.038280	11.97	0.091633	12.15	0.053119	12.33	0.027909
11.62	0.027909	11.80	0.038284	11.98	0.091639	12.17	0.053120	12.35	0.027907
11.63	0.027908	11.82	0.053119	12.00	0.091632	12.18	0.053123	12.37	0.027909
11.65	0.027909	11.83	0.053123	12.02	0.152898	12.20	0.053120	12.38	0.027907
11.67	0.027907	11.85	0.053120	12.03	0.152906	12.22	0.038280	12.40	0.027910
11.68	0.027909	11.87	0.053119	12.05	0.152898	12.23	0.038280	12.42	0.026516
11.70	0.027907	11.88	0.053123	12.07	0.152907	12.25	0.038281	12.43	0.026518
11.72	0.038280	11.90	0.053120	12.08	0.152898	12.27	0.038280	12.45	0.026516
11.73	0.038282	11.92	0.091638	12.10	0.152907	12.28	0.038282	12.47	0.026515
11.75	0.038280	11.93	0.091633	12.12	0.053119	12.30	0.038279	12.48	0.026518
11.77	0.038281	11.95	0.091639	12.13	0.053123	12.32	0.027907	12.50	0.026516

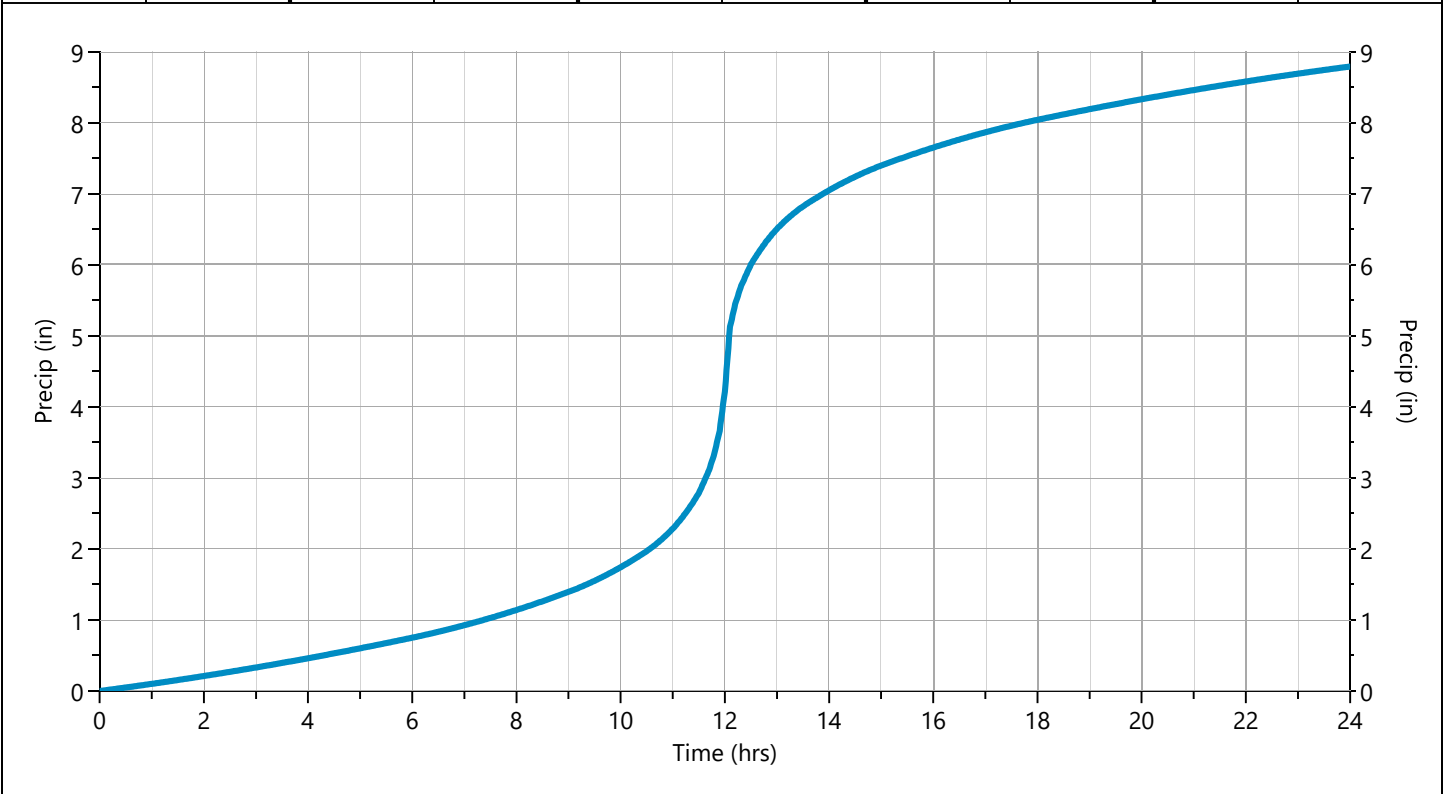

IDF Report

IDF filename: Derby Summit st NOAA.IDF

Hydrology Studio v 3.0.0.44

06-26-2026


Equation Coefficients	Intensity = B / (Tc + D)^E (in/hr)								
	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
B	10.3584	12.3122	0.0000	15.4927	18.1288	21.7643	24.4797	27.2643	
D	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
E	0.5348	0.5344	0.0000	0.5340	0.5328	0.5323	0.5319	0.5310	

Minimum Tc = 5 minutes

Tc (min)	Intensity Values (in/hr)								
	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
Cf	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
5	4.38	5.21	0	6.56	7.69	9.24	10.40	11.60	
10	3.02	3.60	0	4.53	5.32	6.39	7.19	8.03	
15	2.43	2.90	0	3.65	4.28	5.15	5.80	6.47	
20	2.09	2.48	0	3.13	3.67	4.42	4.98	5.56	
25	1.85	2.20	0	2.78	3.26	3.92	4.42	4.94	
30	1.68	2.00	0	2.52	2.96	3.56	4.01	4.48	
35	1.55	1.84	0	2.32	2.73	3.28	3.69	4.13	
40	1.44	1.72	0	2.16	2.54	3.05	3.44	3.85	
45	1.35	1.61	0	2.03	2.38	2.87	3.23	3.61	
50	1.28	1.52	0	1.92	2.25	2.71	3.06	3.42	
55	1.21	1.45	0	1.82	2.14	2.58	2.90	3.25	
60	1.16	1.38	0	1.74	2.05	2.46	2.77	3.10	

Cf = Correction Factor applied to Rational Method runoff coefficient.

Connecticut, USA

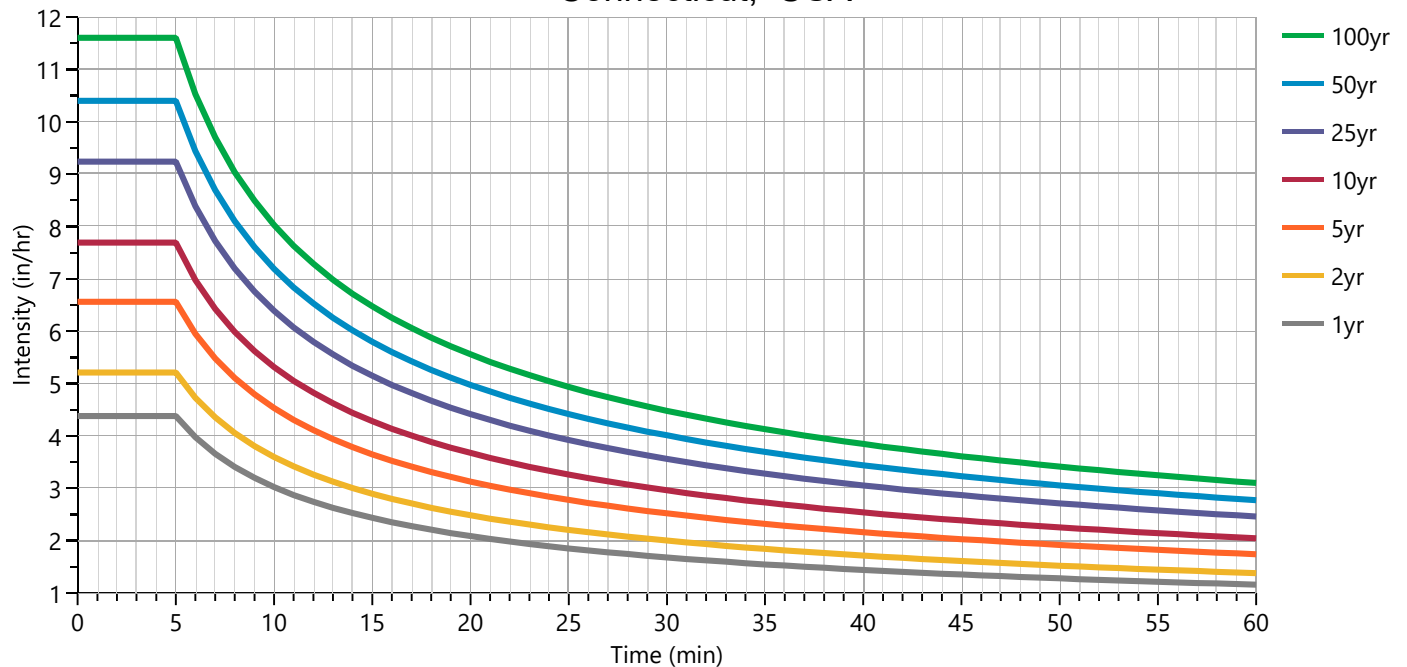

Precipitation Report

Precipitation filename: derby-noaa-ct.pcp

Hydrology Studio v 3.0.0.44 (Rainfall totals in Inches)

06-26-2026

	Active	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr
Active			✓			✓	✓	✓	✓
SCS Storms	> SCS Dimensionless Storms								
SCS 6hr		2.04	2.42	0	3.05	3.57	4.29	4.82	5.39
Type I, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Type IA, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Type II, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Type II FL, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Type III, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Synthetic Storms	> IDF-Based Synthetic Storms								
1-hr		1.16	1.38	0	1.74	2.05	2.46	2.77	3.10
2-hr		1.60	1.91	0	2.40	2.83	3.40	3.84	4.29
3-hr		1.93	2.30	0	2.90	3.42	4.11	4.64	5.19
6-hr		2.67	3.18	0	4.01	4.73	5.69	6.42	7.18
12-hr		3.68	4.39	0	5.54	6.53	7.87	8.88	9.94
24-hr		5.09	6.07	0	7.65	9.03	10.88	12.28	13.77
Huff Distribution	> 1st Quartile (0 to 6 hrs)								
1-hr		1.07	1.28	0	1.61	1.89	2.27	2.56	2.86
2-hr		1.39	1.64	0	2.06	2.41	2.88	3.24	3.62
3-hr		1.60	1.90	0	2.38	2.78	3.33	3.74	4.17
6-hr		2.04	2.42	0	3.05	3.57	4.29	4.82	5.39
Huff Distribution	> 2nd Quartile (>6 to 12 hrs)								
8-hr		0	0	0	0	0	0	0	0
12-hr		2.54	3.05	0	3.89	4.58	5.53	6.24	6.99
Huff Distribution	> 3rd Quartile (>12 to 24 hrs)								
18-hr		0	0	0	0	0	0	0	0
24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Custom Storms	> Custom Storm Distributions								
My Custom Storm 1		0	0	0	0	0	0	0	0
My Custom Storm 2		0	0	0	0	0	0	0	0
My Custom Storm 3		0	0	0	0	0	0	0	0
My Custom Storm 4		0	0	0	0	0	0	0	0
My Custom Storm 5		0	0	0	0	0	0	0	0
My Custom Storm 6		0	0	0	0	0	0	0	0
My Custom Storm 7		0	0	0	0	0	0	0	0
My Custom Storm 8		0	0	0	0	0	0	0	0
My Custom Storm 9		0	0	0	0	0	0	0	0
My Custom Storm 10		0	0	0	0	0	0	0	0

Precipitation Report Cont'd

Precipitation filename: derby-noaa-ct.pcp

Rainfall totals in Inches

06-26-2026

	Active	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr
Active			✓			✓	✓	✓	✓
Huff Indiana	> Indianapolis								
30-min		0.84	1.00	0	1.26	1.48	1.78	2.00	2.24
1-hr		1.07	1.28	0	1.61	1.89	2.27	2.56	2.86
2-hr		1.39	1.64	0	2.06	2.41	2.88	3.24	3.62
3-hr		1.60	1.90	0	2.38	2.78	3.33	3.74	4.17
6-hr		2.04	2.42	0	3.05	3.57	4.29	4.82	5.39
12-hr		2.54	3.05	0	3.89	4.58	5.53	6.24	6.99
24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Huff Indiana	> Evansville								
30-min		0.84	1.00	0	1.26	1.48	1.78	2.00	2.24
1-hr		1.07	1.28	0	1.61	1.89	2.27	2.56	2.86
2-hr		1.39	1.64	0	2.06	2.41	2.88	3.24	3.62
3-hr		1.60	1.90	0	2.38	2.78	3.33	3.74	4.17
6-hr		2.04	2.42	0	3.05	3.57	4.29	4.82	5.39
12-hr		2.54	3.05	0	3.89	4.58	5.53	6.24	6.99
24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Huff Indiana	> Fort Wayne								
30-min		0.84	1.00	0	1.26	1.48	1.78	2.00	2.24
1-hr		1.07	1.28	0	1.61	1.89	2.27	2.56	2.86
2-hr		1.39	1.64	0	2.06	2.41	2.88	3.24	3.62
3-hr		1.60	1.90	0	2.38	2.78	3.33	3.74	4.17
6-hr		2.04	2.42	0	3.05	3.57	4.29	4.82	5.39
12-hr		2.54	3.05	0	3.89	4.58	5.53	6.24	6.99
24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
Huff Indiana	> South Bend								
30-min		0.84	1.00	0	1.26	1.48	1.78	2.00	2.24
1-hr		1.07	1.28	0	1.61	1.89	2.27	2.56	2.86
2-hr		1.39	1.64	0	2.06	2.41	2.88	3.24	3.62
3-hr		1.60	1.90	0	2.38	2.78	3.33	3.74	4.17
6-hr		2.04	2.42	0	3.05	3.57	4.29	4.82	5.39
12-hr		2.54	3.05	0	3.89	4.58	5.53	6.24	6.99
24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79

Precipitation Report Cont'd

Precipitation filename: derby-noaa-ct.pcp

Rainfall totals in Inches

06-26-2026

	Active	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr
Active			✓			✓	✓	✓	✓
NRCS Storms	> NRCS Dimensionless Storms								
NRCS MSE1, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCS MSE2, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCS MSE3, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCS MSE4, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCS MSE5, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCS MSE6, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NOAA-A, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NOAA-B, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NOAA-C, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NOAA-D, 24-hr	✓	3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCC-A, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCC-B, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCC-C, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
NRCC-D, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
CA-1, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
CA-2, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
CA-3, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
CA-4, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
CA-5, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
CA-6, 24-hr		3.01	3.67	0	4.75	5.65	6.88	7.80	8.79
FDOT Storms	> Florida DOT Storms								
FDOT, 1-hr		1.07	1.28	2.36	1.61	1.89	2.27	2.56	2.86
FDOT, 2-hr		1.39	1.64	3.00	2.06	2.41	2.88	3.24	3.62
FDOT, 4-hr		0	3.28	3.76	4.00	4.80	5.50	6.20	6.80
FDOT, 8-hr		0	3.76	4.32	4.80	5.60	6.20	7.20	8.00
FDOT, 24-hr		3.01	3.67	4.75	4.75	5.65	6.88	7.80	8.79
FDOT, 72-hr		0	5.44	6.10	6.74	7.98	9.92	11.60	13.40
SFWMD, 72-hr		0	5.44	6.10	6.74	7.98	9.92	11.60	13.40
Austin Storms	> Austin Frequency Storms								
Austin Zone 1, 24-hr		0	4.14	0	5.51	6.84	8.90	10.69	12.80
Austin Zone 2, 24-hr		0	4.06	0	5.38	6.65	8.59	10.28	12.23

Appendix B
Drainage Area Maps, Existing & Proposed Conditions

[illegible]

PROJECT TITLE


**SUMMIT STREET
EXTENSION
DERBY, CONNECTICUT**

Prepared For:
SUMMIT HILL, LLC

SHEET TITLE

**EXISTING DRAINAGE AREA
MAP**

DESIGNED BY: SFS	SCALE: 1"=80'
DRAWN BY: SFS	DATE: 01-05-23
CHECKED BY: MUS	PROJECT NUMBER: 2508
CAD FILE: R:\2508\dwg\2508	

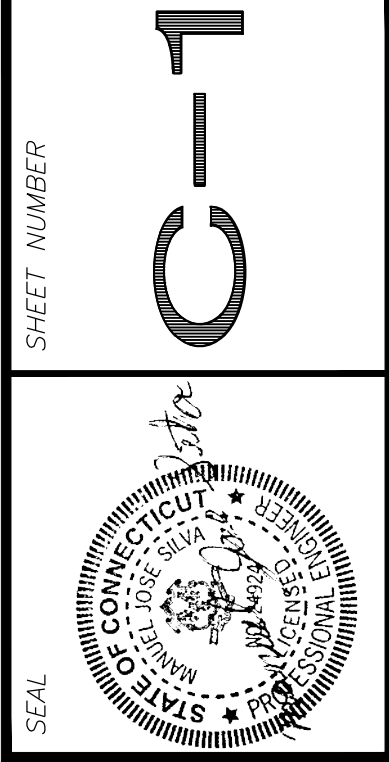

[illegible]

PROJECT TITLE



**SUMMIT STREET
EXTENSION
DERBY, CONNECTICUT**

Prepared For:
SUMMIT HILL, LLC

SHEET TITLE

**PROPOSED DRAINAGE AREA
MAP**


DESIGNED BY: SFS	SCALE: 1"=80'
DRAWN BY: SFS	DATE: 01-05-23
CHECKED BY: MUS	PROJECT NUMBER: 2508
CAD FILE: R:\2508\dwg\2508	

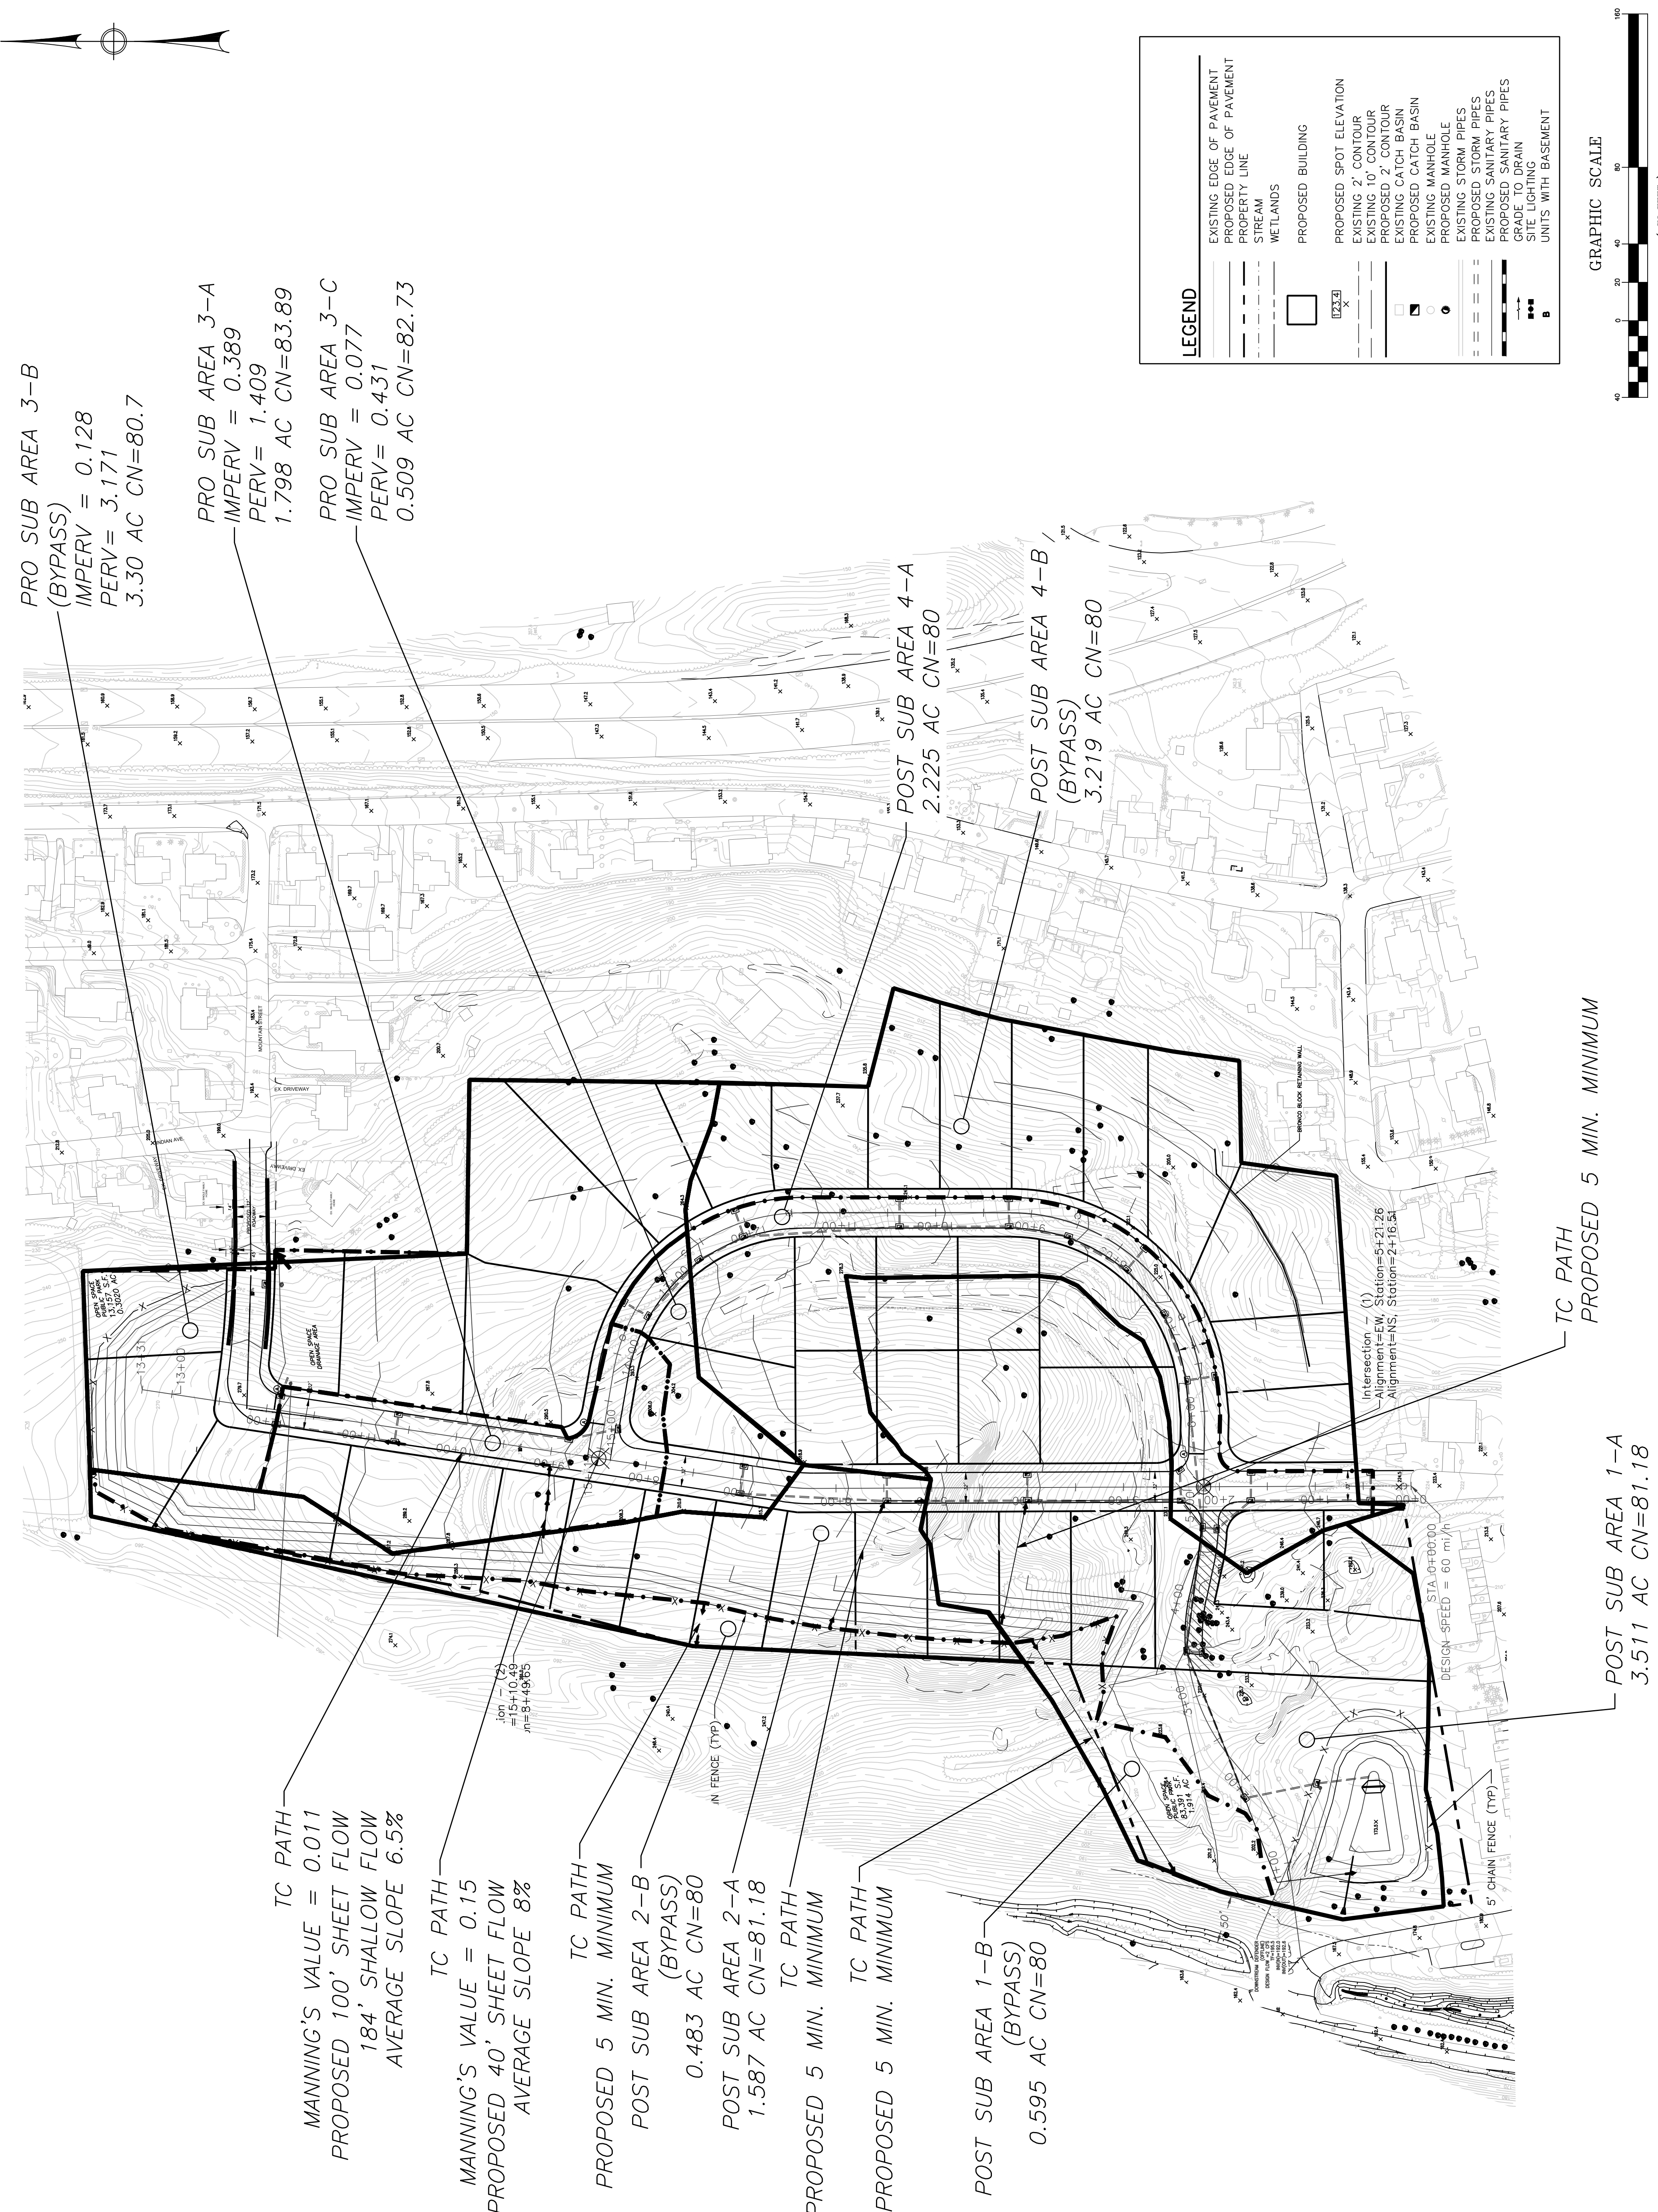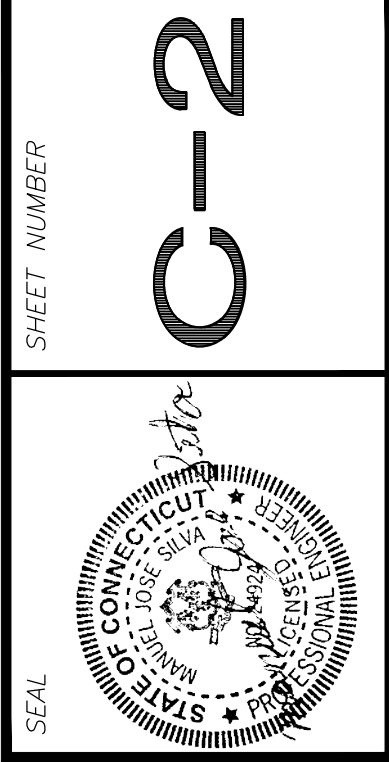

Soil Map—State of Connecticut, Western Part



Soil Map may not be valid at this scale.



**Natural Resources
Conservation Service**

Web Soil Survey
National Cooperative Soil Survey

6/16/2026
Page 1 of 3

MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)

Soils

 Soil Map Unit Polygons

 Soil Map Unit Lines

 Soil Map Unit Points

Special Point Features

 Blowout

 Borrow Pit

 Clay Spot

 Closed Depression

 Gravel Pit

 Gravelly Spot

 Landfill

 Lava Flow

 Marsh or swamp

 Mine or Quarry

 Miscellaneous Water

 Perennial Water

 Rock Outcrop

 Saline Spot

 Sandy Spot

 Severely Eroded Spot

 Sinkhole

 Slide or Slip

 Sodic Spot

Water Features

 Streams and Canals

Transportation

 Rails

 Interstate Highways

 US Routes

 Major Roads

 Local Roads

Background

 Aerial Photography

Other

 Spoil Area

 Stony Spot

 Very Stony Spot

 Wet Spot

 Other

 Special Line Features

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:12,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL:
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: State of Connecticut, Western Part
Survey Area Data: Version 6, Sep 16, 2025

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Oct 21, 2022—Oct 27, 2022

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
60D	Canton and Charlton soils, 15 to 25 percent slopes	2.0	3.8%
73C	Charlton-Chatfield complex, 0 to 15 percent slopes, very rocky	2.0	3.7%
73E	Charlton-Chatfield complex, 15 to 45 percent slopes, very rocky	5.6	10.4%
75C	Hollis-Chatfield-Rock outcrop complex, 3 to 15 percent slopes	4.0	7.5%
75E	Hollis-Chatfield-Rock outcrop complex, 15 to 45 percent slopes	17.3	31.8%
229B	Agawam-Urban land complex, 0 to 8 percent slopes	2.2	4.1%
260B	Charlton-Urban land complex, 3 to 8 percent slopes	5.5	10.1%
260C	Charlton-Urban land complex, 8 to 15 percent slopes	0.3	0.6%
260D	Charlton-Urban land complex, 15 to 25 percent slopes	1.2	2.2%
273C	Urban land-Charlton-Chatfield complex, rocky, 3 to 15 percent slopes	0.3	0.6%
273E	Urban land-Charlton-Chatfield complex, rocky, 15 to 45 percent slopes	8.3	15.2%
306	Udorthents-Urban land complex	5.5	10.1%
Totals for Area of Interest		54.3	100.0%

State of Connecticut, Western Part

75E—Hollis-Chatfield-Rock outcrop complex, 15 to 45 percent slopes

Map Unit Setting

National map unit symbol: 9lqp

Landscape: Uplands

Elevation: 0 to 1,200 feet

Mean annual precipitation: 43 to 56 inches

Mean annual air temperature: 45 to 55 degrees F

Frost-free period: 140 to 185 days

Farmland classification: Not prime farmland

Map Unit Composition

Hollis and similar soils: 35 percent

Chatfield and similar soils: 30 percent

Rock outcrop: 15 percent

Minor components: 20 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Hollis

Setting

Landscape: Uplands

Landform: Bedrock controlled ridges, Bedrock controlled hills

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loamy melt-out till derived from granite and/or schist and/or gneiss

Typical profile

Oa - 0 to 1 inches: highly decomposed plant material

A - 1 to 6 inches: gravelly fine sandy loam

Bw1 - 6 to 9 inches: channery fine sandy loam

Bw2 - 9 to 15 inches: gravelly fine sandy loam

2R - 15 to 80 inches: bedrock

Properties and qualities

Slope: 15 to 45 percent

Surface area covered with cobbles, stones or boulders: 9.0 percent

Depth to restrictive feature: 10 to 20 inches to lithic bedrock

Drainage class: Somewhat excessively drained

Runoff class: High

Capacity of the most limiting layer to transmit water (Ksat): Low to high (0.01 to 5.95 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water supply, 0 to 60 inches: Very low (about 1.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: D

Ecological site: F144AY033MA - Shallow Dry Till Uplands

Hydric soil rating: No

Description of Chatfield

Setting

Landscape: Uplands

Landform: Bedrock controlled ridges, Bedrock controlled hills

Down-slope shape: Convex

Across-slope shape: Linear

Parent material: Coarse-loamy melt-out till derived from granite and/or schist and/or gneiss

Typical profile

Oa - 0 to 1 inches: highly decomposed plant material

A - 1 to 6 inches: gravelly fine sandy loam

Bw1 - 6 to 15 inches: gravelly fine sandy loam

Bw2 - 15 to 29 inches: gravelly fine sandy loam

2R - 29 to 80 inches: unweathered bedrock

Properties and qualities

Slope: 15 to 45 percent

Surface area covered with cobbles, stones or boulders: 1.6 percent

Depth to restrictive feature: 20 to 40 inches to lithic bedrock

Drainage class: Well drained

Runoff class: High

Capacity of the most limiting layer to transmit water (Ksat): Low to high (0.01 to 5.95 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water supply, 0 to 60 inches: Low (about 3.3 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: B

Ecological site: F144AY034CT - Well Drained Till Uplands

Hydric soil rating: No

Description of Rock Outcrop

Typical profile

R - 0 to 0 inches: bedrock

Properties and qualities

Slope: 15 to 45 percent

Depth to restrictive feature: 0 inches to lithic bedrock

Runoff class: Very high

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 8

Hydrologic Soil Group: D

Hydric soil rating: Unranked

Minor Components

Charlton

Percent of map unit: 7 percent

Landscape: Uplands

Landform: Hills

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

Sutton, very stony

Percent of map unit: 5 percent

Landscape: Uplands

Landform: Drainageways, Depressions

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Leicester

Percent of map unit: 5 percent

Landscape: Uplands

Landform: Drainageways, Depressions

Down-slope shape: Linear

Across-slope shape: Concave

Hydric soil rating: Yes

Brimfield

Percent of map unit: 1 percent

Landscape: Uplands

Landform: Bedrock controlled ridges, Bedrock controlled hills

Down-slope shape: Convex

Across-slope shape: Convex

Hydric soil rating: No

Unnamed, red parent material

Percent of map unit: 1 percent

Hydric soil rating: No

Unnamed, sandy subsoil

Percent of map unit: 1 percent

Hydric soil rating: No

Data Source Information

Soil Survey Area: State of Connecticut, Western Part

Survey Area Data: Version 6, Sep 16, 2025

State of Connecticut, Western Part

75C—Hollis-Chatfield-Rock outcrop complex, 3 to 15 percent slopes

Map Unit Setting

National map unit symbol: 9lqn

Landscape: Uplands

Elevation: 0 to 1,200 feet

Mean annual precipitation: 43 to 56 inches

Mean annual air temperature: 45 to 55 degrees F

Frost-free period: 140 to 185 days

Farmland classification: Not prime farmland

Map Unit Composition

Hollis and similar soils: 35 percent

Chatfield and similar soils: 30 percent

Rock outcrop: 15 percent

Minor components: 20 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Hollis

Setting

Landscape: Uplands

Landform: Bedrock controlled ridges, Bedrock controlled hills

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loamy melt-out till derived from granite and/or schist and/or gneiss

Typical profile

Oa - 0 to 1 inches: highly decomposed plant material

A - 1 to 6 inches: gravelly fine sandy loam

Bw1 - 6 to 9 inches: channery fine sandy loam

Bw2 - 9 to 15 inches: gravelly fine sandy loam

2R - 15 to 80 inches: bedrock

Properties and qualities

Slope: 3 to 15 percent

Surface area covered with cobbles, stones or boulders: 9.0 percent

Depth to restrictive feature: 10 to 20 inches to lithic bedrock

Drainage class: Somewhat excessively drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Low to high (0.01 to 5.95 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water supply, 0 to 60 inches: Very low (about 1.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 6s

Hydrologic Soil Group: D

Ecological site: F144AY033MA - Shallow Dry Till Uplands

Hydric soil rating: No

Description of Chatfield

Setting

Landscape: Uplands

Landform: Bedrock controlled ridges, Bedrock controlled hills

Down-slope shape: Convex

Across-slope shape: Linear

Parent material: Coarse-loamy melt-out till derived from granite and/or schist and/or gneiss

Typical profile

Oa - 0 to 1 inches: highly decomposed plant material

A - 1 to 6 inches: gravelly fine sandy loam

Bw1 - 6 to 15 inches: gravelly fine sandy loam

Bw2 - 15 to 29 inches: gravelly fine sandy loam

2R - 29 to 80 inches: unweathered bedrock

Properties and qualities

Slope: 3 to 15 percent

Surface area covered with cobbles, stones or boulders: 1.6 percent

Depth to restrictive feature: 20 to 40 inches to lithic bedrock

Drainage class: Well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Low to high (0.01 to 5.95 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water supply, 0 to 60 inches: Low (about 3.3 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 6s

Hydrologic Soil Group: B

Ecological site: F144AY034CT - Well Drained Till Uplands

Hydric soil rating: No

Description of Rock Outcrop

Typical profile

R - 0 to 0 inches: bedrock

Properties and qualities

Slope: 3 to 15 percent

Depth to restrictive feature: 0 inches to lithic bedrock

Runoff class: Very high

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 8

Hydrologic Soil Group: D

Hydric soil rating: Unranked

Minor Components

Charlton

Percent of map unit: 7 percent

Landscape: Uplands

Landform: Hills

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

Sutton, very stony

Percent of map unit: 5 percent

Landscape: Uplands

Landform: Drainageways, Depressions

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Leicester

Percent of map unit: 5 percent

Landscape: Uplands

Landform: Drainageways, Depressions

Down-slope shape: Linear

Across-slope shape: Concave

Hydric soil rating: Yes

Brimfield

Percent of map unit: 1 percent

Landscape: Uplands

Landform: Bedrock controlled ridges, Bedrock controlled hills

Down-slope shape: Convex

Across-slope shape: Convex

Hydric soil rating: No

Unnamed, sandy subsoil

Percent of map unit: 1 percent

Hydric soil rating: No

Unnamed, red parent material

Percent of map unit: 1 percent

Hydric soil rating: No

Data Source Information

Soil Survey Area: State of Connecticut, Western Part

Survey Area Data: Version 6, Sep 16, 2025

APPENDIX C
Water quality Volume Calcs

WATER QUALITY VOLUME COMPUTATION SOUTH POND:

RESIDENTIAL DEVELOPMENT (SOUTH) = 9.83 AC SF

IMPERV=1.19 AC OR 12.1%

$WQV = (P \cdot RV \cdot A)$; $RV = 0.05 + 0.009 \cdot I$

$RV = 0.05 + 0.009 \cdot I = 0.1589$ WATERSHED INCHES

$WQV = (1.3 \cdot 0.1589 \cdot 428,194) / 12 = 5,670$ CF REQUIRED

PROVIDED = 7,371 CF @ ELEVATION 176.5'

RESIDENTIAL DEVELOPMENT NORTH = 5.097 AC

IMPERVIOUS = 0.517 AC OR 10.1%

$WQV = (P \cdot RV \cdot A)$; $RV = 0.05 + 0.009 \cdot I$

$RV = 0.05 + 0.009 \cdot I = 0.141$ WATERSHED INCHES


$WQV = (0.141 \cdot 222,025) / 12 = 2,608$ CF REQUIRED

PROVIDED = 2,608 CF @ ELEVATION 224.78'


APPENDIX D

HGL storm sewer calculation 10-year storm
Storm sewer Calcs with Gutter flow analysis


Storm Sewer Profile

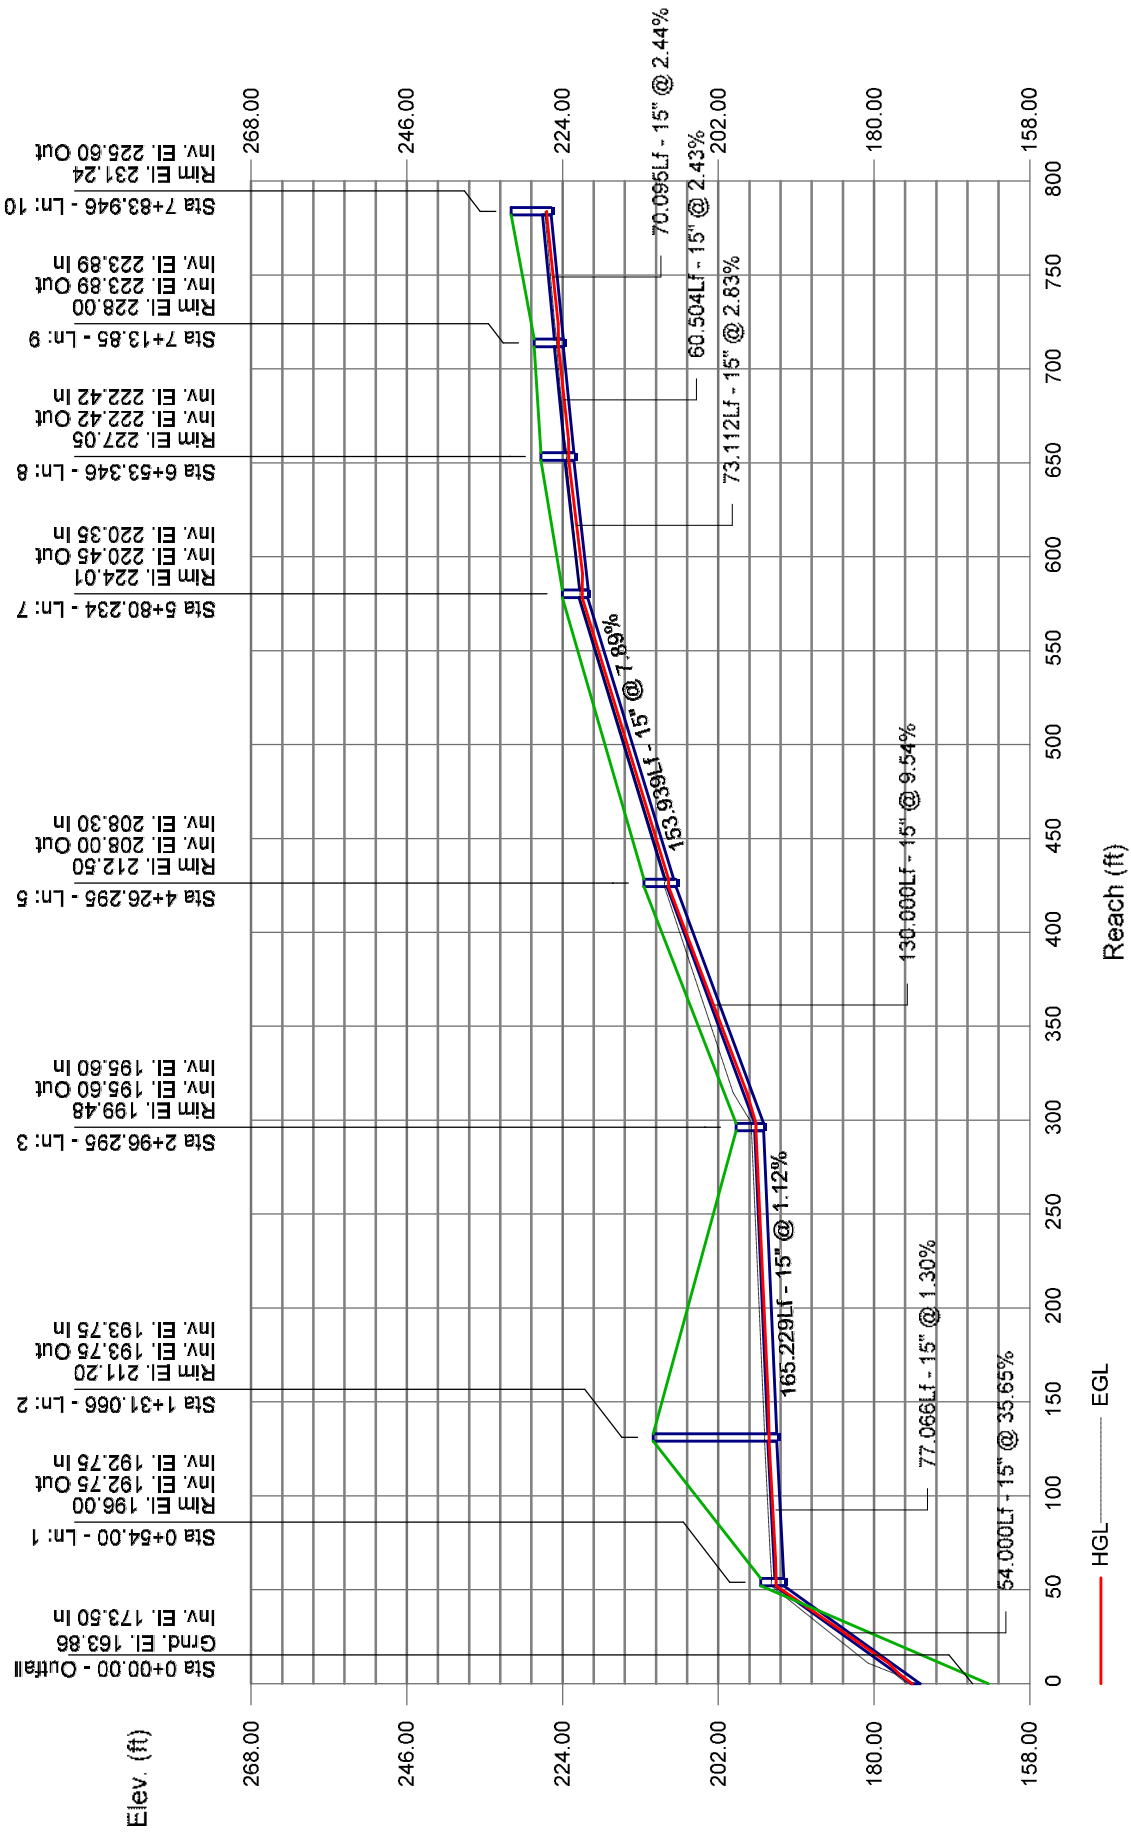


Storm Sewer Profile

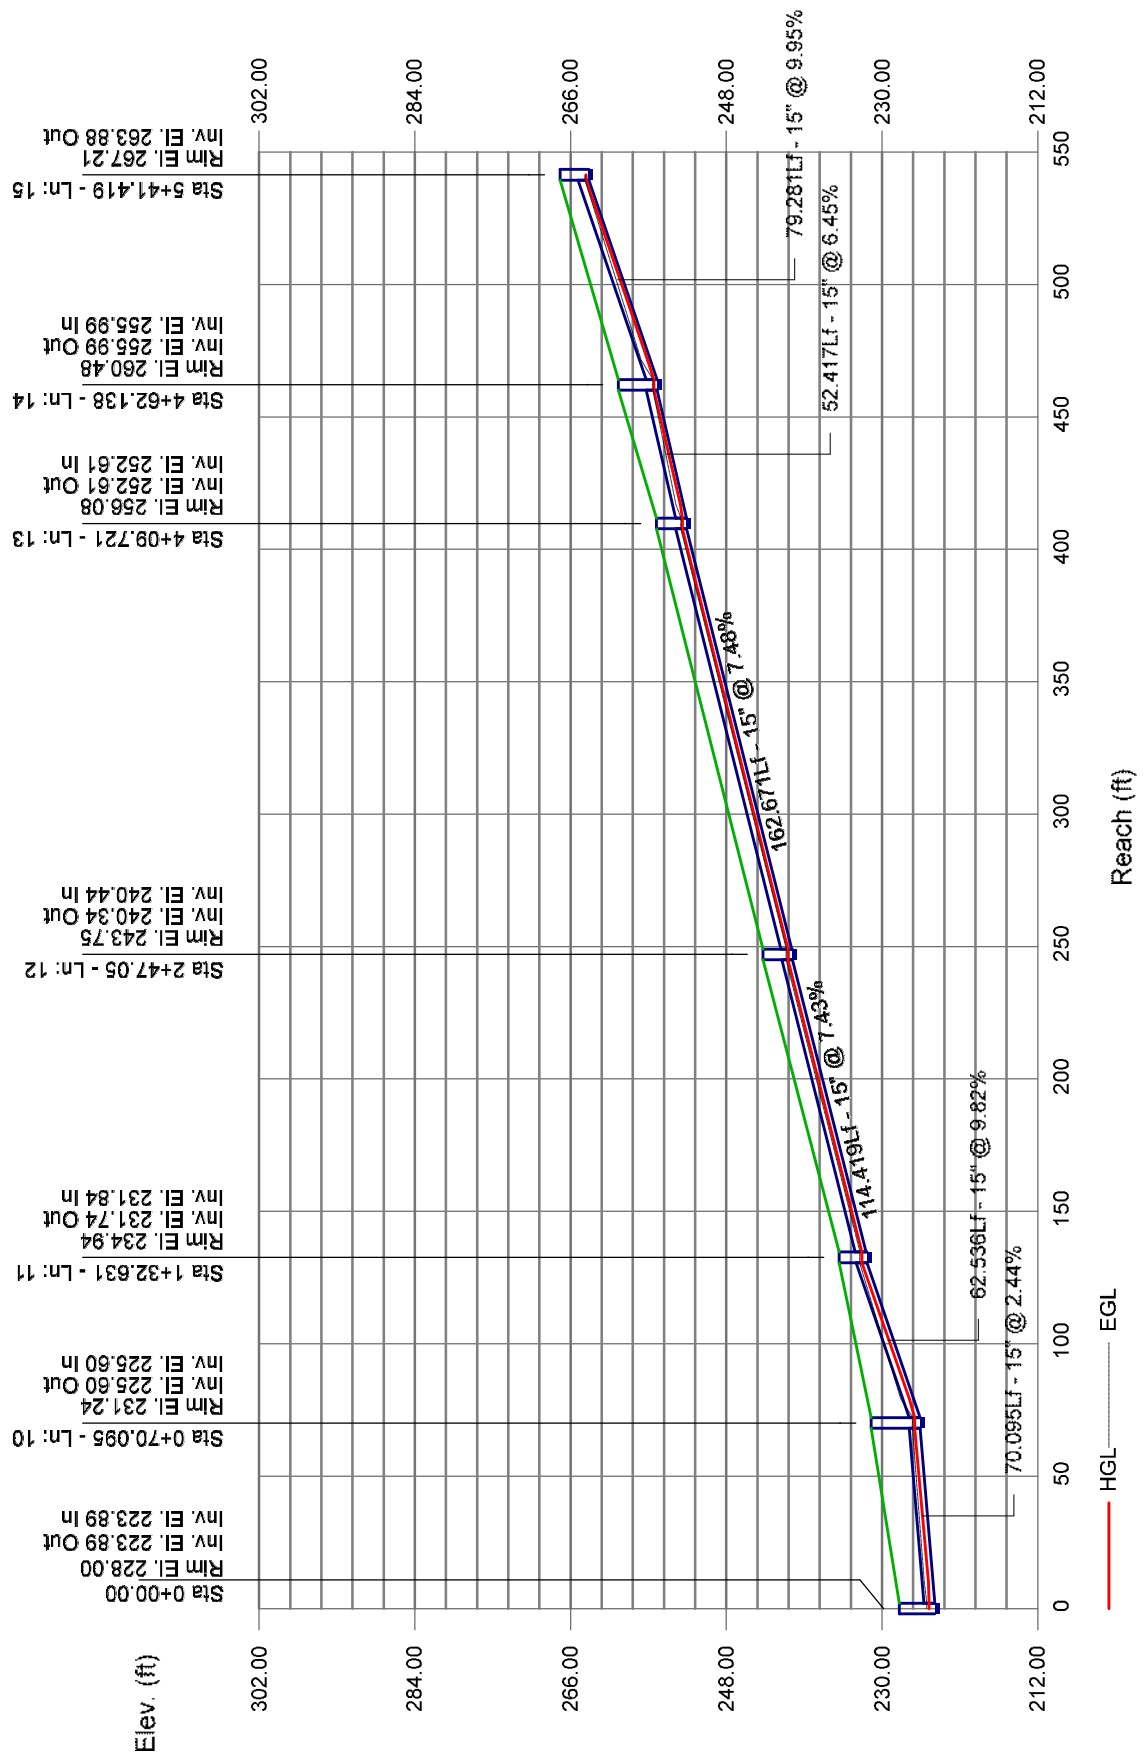

Storm Sewer Profile

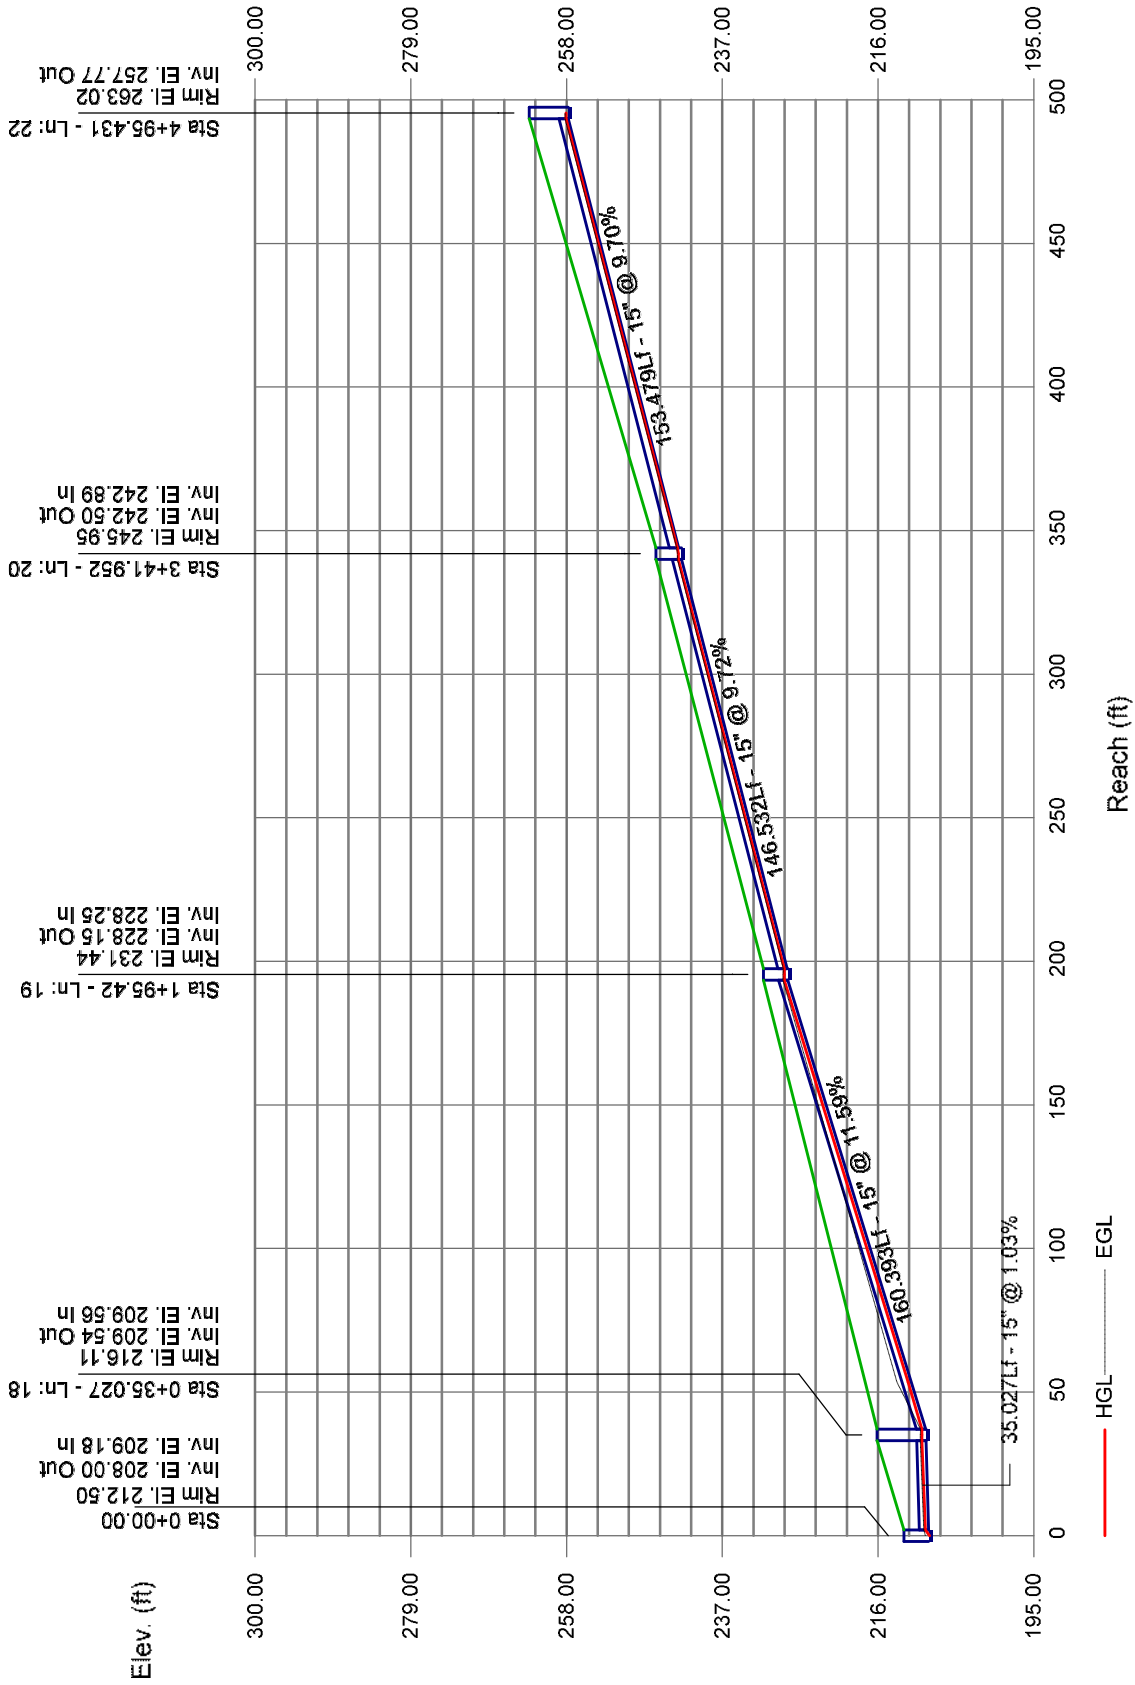

Hydraflow Storm Sewers Extension for Autodesk® Civil 3D® Plan

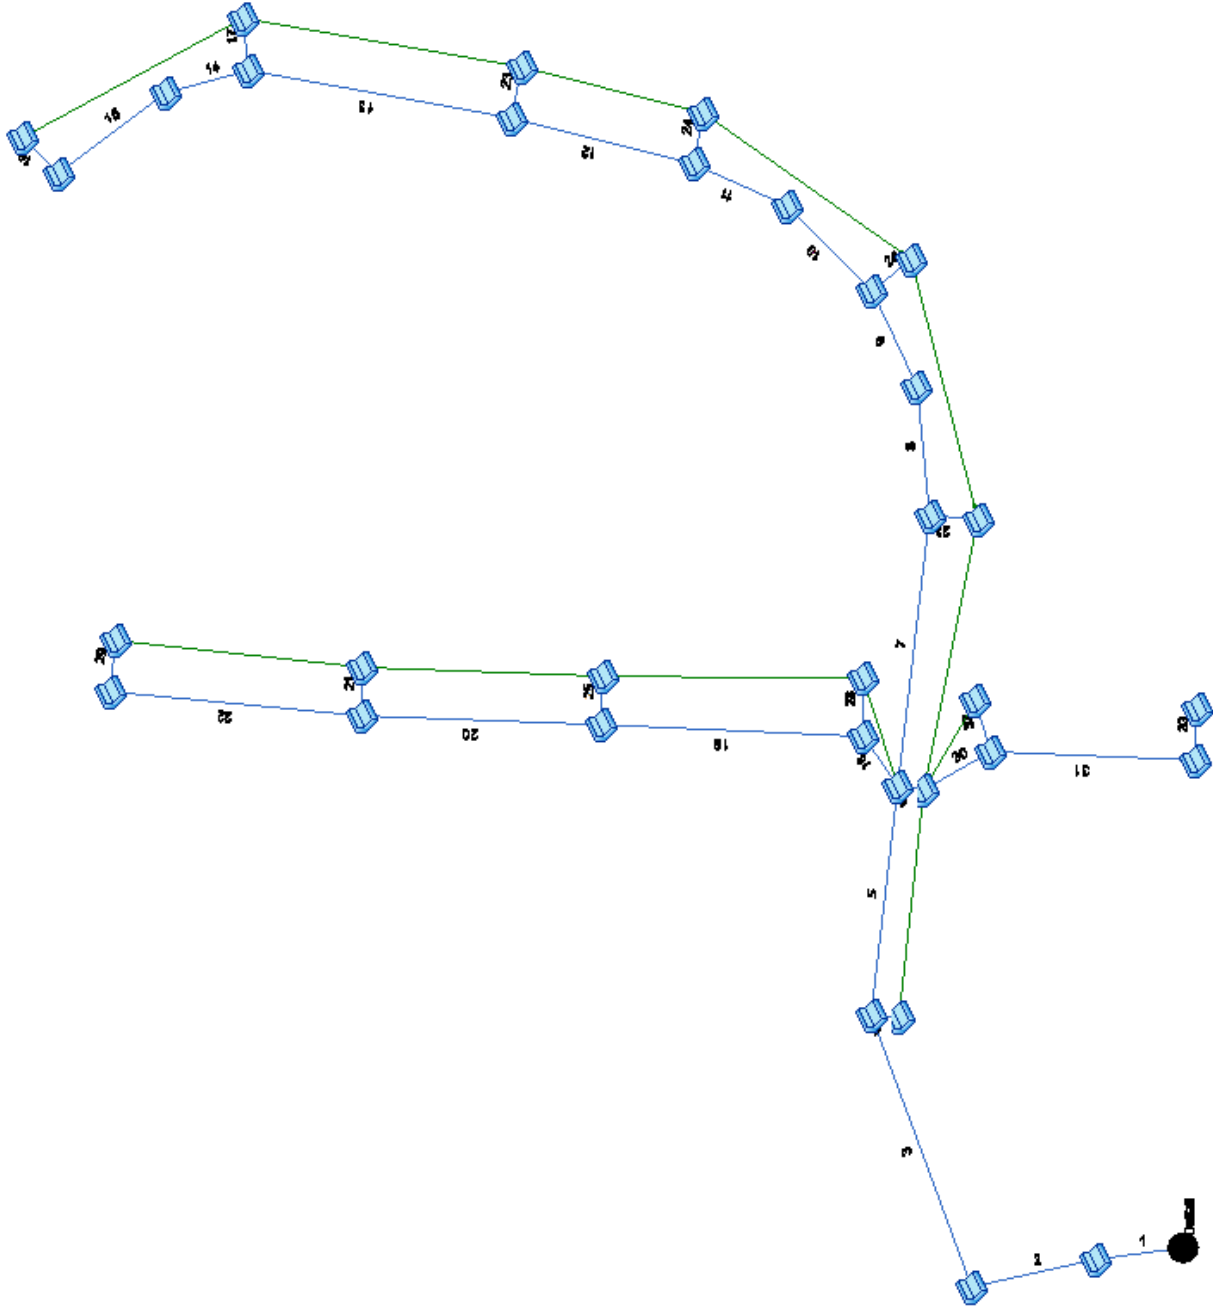

Storm Sewer Inventory Report

Line No.	Alignment				Flow Data				Physical Data							Line ID	
	Dnstr Line No.	Line Length (ft)	Defl angle (deg)	Junc Type	Known Q (cfs)	Drng Area (ac)	Runoff Coeff (C)	Inlet Time (min)	Invert EI Dn (ft)	Line Slope (%)	Invert EI Up (ft)	Line Size (in)	Line Shape	N Value (n)	J-Loss Coeff (K)		Inlet/ Rim EI (ft)
1	End	54.000	-97.078	Comb	0.00	0.06	0.90	5.0	173.50	35.65	192.75	15	Cir	0.012	0.50	196.00	Pipe - (252)
2	1	77.066	-4.421	Comb	0.00	0.06	0.90	5.0	192.75	1.30	193.75	15	Cir	0.012	1.48	211.20	Pipe - (244)
3	2	165.229	79.718	Comb	0.00	0.06	0.90	5.0	193.75	1.12	195.60	15	Cir	0.012	1.82	199.48	Pipe - (243)
4	3	17.082	116.686	Comb	0.00	0.06	0.90	5.0	195.60	1.52	195.86	15	Cir	0.012	1.00	199.11	Pipe - (247)
5	3	130.000	29.000	Comb	0.00	0.06	0.90	5.0	195.60	9.54	208.00	15	Cir	0.012	1.66	212.50	Pipe - (242)
6	5	16.000	90.000	Comb	0.00	0.06	0.90	5.0	208.09	1.19	208.28	15	Cir	0.012	0.94	212.50	Pipe - (234)
7	5	153.939	0.000	Comb	0.00	0.06	0.90	5.0	208.30	7.89	220.45	15	Cir	0.012	1.50	224.01	Pipe - (233)
8	7	73.112	-13.226	Comb	0.00	0.06	0.90	5.0	220.35	2.83	222.42	15	Cir	0.012	0.61	227.05	Pipe - (266)
9	8	60.504	-20.809	Comb	0.00	0.06	0.90	5.0	222.42	2.43	223.89	15	Cir	0.012	1.48	228.00	Pipe - (232)
10	9	70.095	-20.376	Comb	0.00	0.06	0.90	5.0	223.89	2.44	225.60	15	Cir	0.012	0.60	231.24	Pipe - (265)
11	10	62.536	-20.329	Comb	0.00	0.06	0.90	5.0	225.60	9.82	231.74	15	Cir	0.012	1.48	234.94	Pipe - (231)
12	11	114.419	-9.356	Comb	0.00	0.06	0.90	5.0	231.84	7.43	240.34	15	Cir	0.012	1.50	243.75	Pipe - (230)
13	12	162.671	-3.640	Comb	0.00	0.06	0.90	5.0	240.44	7.48	252.61	15	Cir	0.012	1.46	256.08	Pipe - (229)
14	13	52.417	-23.773	Comb	0.00	0.06	0.90	5.0	252.61	6.45	255.99	15	Cir	0.012	0.60	260.48	Pipe - (264)
15	14	79.281	-20.372	Comb	0.00	0.06	0.90	5.0	255.99	9.95	263.88	15	Cir	0.012	1.47	267.21	Pipe - (228)
16	15	29.485	77.993	Comb	0.00	0.06	0.90	5.0	263.98	1.05	264.29	15	Cir	0.012	1.00	267.15	Pipe - (227)
17	13	29.529	74.678	Comb	0.00	0.06	0.90	5.0	252.92	1.02	253.22	15	Cir	0.012	1.00	256.08	Pipe - (271)
18	5	35.027	-44.029	Comb	0.00	0.06	0.90	5.0	209.18	1.03	209.54	15	Cir	0.012	1.46	216.11	Pipe - (276)
19	18	160.393	-50.812	Comb	0.00	0.06	0.90	5.0	209.56	11.59	228.15	15	Cir	0.012	1.50	231.44	Pipe - (203)
20	19	146.532	-0.428	Comb	0.00	0.06	0.90	5.0	228.25	9.72	242.50	15	Cir	0.012	1.75	245.95	Pipe - (202)
21	20	27.339	89.968	Comb	0.00	0.06	0.90	5.0	242.70	1.50	243.11	15	Cir	0.012	1.00	245.96	Pipe - (205)
22	20	153.479	3.119	Comb	0.00	0.06	0.90	5.0	242.89	9.70	257.77	15	Cir	0.012	1.50	0.00	Pipe - (201)
23	12	29.438	90.226	Comb	0.00	0.06	0.90	5.0	240.08	2.75	240.89	15	Cir	0.012	1.00	243.74	Pipe - (270)
Project File: Storm sewers.stm										Number of lines: 33							Date: 6/26/2026

Storm Sewer Inventory Report

Line No.	Alignment				Flow Data				Physical Data								Line ID
	Dnstr Line No.	Line Length (ft)	Defl angle (deg)	Junc Type	Known Q (cfs)	Drng Area (ac)	Runoff Coeff (C)	Inlet Time (min)	Invert EI Dn (ft)	Line Slope (%)	Invert EI Up (ft)	Line Size (in)	Line Shape	N Value (n)	J-Loss Coeff (K)	Inlet/ Rim EI (ft)	
24	11	29,319	79.689	Comb	0.00	0.06	0.90	5.0	231.89	0.99	232.18	15	Cir	0.012	1.00	235.03	Pipe - (269)
25	19	27,356	89.612	Comb	0.00	0.06	0.90	5.0	228.14	1.54	228.56	15	Cir	0.012	1.00	231.41	Pipe - (206)
26	9	29,553	80.138	Comb	0.00	0.06	0.90	5.0	224.85	0.98	225.14	15	Cir	0.012	1.00	228.00	Pipe - (268)
27	7	29,556	87.270	Comb	0.00	0.06	0.90	5.0	220.86	0.98	221.15	15	Cir	0.012	1.00	224.01	Pipe - (238)
28	18	32,611	36.535	Comb	0.00	0.06	0.90	5.0	209.64	0.98	209.96	15	Cir	0.012	1.00	217.95	Pipe - (275)
29	22	29,000	90.000	Comb	0.00	0.06	0.90	5.0	257.87	1.55	258.32	15	Cir	0.012	1.00	0.00	Pipe - (200)
30	6	46,000	-35.000	Comb	0.00	0.06	0.90	5.0	208.25	1.00	208.71	15	Cir	0.012	1.48	212.14	Pipe - (235)
31	30	125,000	30.000	Comb	0.00	0.06	0.90	5.0	208.72	9.38	220.44	15	Cir	0.012	1.50	223.99	Pipe - (272)
32	30	30,000	-80.000	Comb	0.00	0.06	0.90	5.0	207.85	0.90	208.12	15	Cir	0.012	1.00	216.29	Pipe - (236)
33	31	29,252	-90.144	Comb	0.00	0.06	0.90	5.0	220.84	1.00	221.13	15	Cir	0.012	1.00	223.99	Pipe - (267)
Project File: Storm sewers.slm									Number of lines: 33								Date: 6/26/2026

Structure Report

Struct No.	Structure ID	Junction Type	Rim Elev (ft)	Structure			Line Out			Line In		
				Shape	Length (ft)	Width (ft)	Size (in)	Shape	Invert (ft)	Size (in)	Shape	Invert (ft)
1	Structure - (277)	Combination	196.00	Rect	4.00	4.00	15	Cir	192.75	15	Cir	192.75
2	Structure - (264)	Combination	211.20	Rect	4.00	4.00	15	Cir	193.75	15	Cir	193.75
3	Structure - (263)	Combination	199.48	Rect	4.00	4.00	15	Cir	195.60	15	Cir	195.60
4	Structure - (272)	Combination	199.11	Rect	4.00	4.00	15	Cir	195.86	15	Cir	195.60
5	Structure - (300)	Combination	212.50	Rect	4.00	4.00	15	Cir	208.00	15	Cir	208.09
6	Structure - (300)	Combination	212.50	Rect	4.00	4.00	15	Cir	208.28	15	Cir	208.30
7	Structure - (253)	Combination	224.01	Rect	4.00	4.00	15	Cir	220.45	15	Cir	209.18
8	Structure - (296)	Combination	227.05	Rect	4.00	4.00	15	Cir	222.42	15	Cir	208.25
9	Structure - (252)	Combination	228.00	Rect	4.00	4.00	15	Cir	223.89	15	Cir	220.35
10	Structure - (295)	Combination	231.24	Rect	4.00	4.00	15	Cir	225.60	15	Cir	220.86
11	Structure - (251)	Combination	234.94	Rect	4.00	4.00	15	Cir	231.74	15	Cir	222.42
12	Structure - (250)	Combination	243.75	Rect	4.00	4.00	15	Cir	240.34	15	Cir	223.89
13	Structure - (249)	Combination	256.08	Rect	4.00	4.00	15	Cir	252.61	15	Cir	224.85
14	Structure - (294)	Combination	260.48	Rect	4.00	4.00	15	Cir	255.99	15	Cir	225.60
15	Structure - (248)	Combination	267.21	Rect	4.00	4.00	15	Cir	263.88	15	Cir	231.84
16	Structure - (247)	Combination	267.15	Rect	4.00	4.00	15	Cir	264.29	15	Cir	231.89
17	Structure - (262)	Combination	256.08	Rect	4.00	4.00	15	Cir	253.22	15	Cir	240.44
18	Structure - (217)	Combination	216.11	Rect	4.00	4.00	15	Cir	209.54	15	Cir	240.08
Project File: Storm sewers.slm				Number of Structures: 33			Run Date: 6/26/2026					

Structure Report

Struct No.	Structure ID	Junction Type	Rim Elev (ft)	Structure			Line Out			Line In		
				Shape	Length (ft)	Width (ft)	Size (in)	Shape	Invert (ft)	Size (in)	Shape	Invert (ft)
19	Structure - (216)	Combination	231.44	Rect	4.00	4.00	15	Cir	228.15	15	Cir	228.25
20	Structure - (215)	Combination	245.95	Rect	4.00	4.00	15	Cir	242.50	15	Cir	228.14
21	Structure - (219)	Combination	245.96	Rect	4.00	4.00	15	Cir	243.11	15	Cir	242.70
22	Null Structure	Combination	0.00	Rect	4.00	4.00	15	Cir	257.77	15	Cir	242.89
23	Structure - (269)	Combination	243.74	Rect	4.00	4.00	15	Cir	240.89	15	Cir	
24	Structure - (261)	Combination	235.03	Rect	4.00	4.00	15	Cir	232.18	15	Cir	257.87
25	Structure - (220)	Combination	231.41	Rect	4.00	4.00	15	Cir	228.56	15	Cir	
26	Structure - (260)	Combination	228.00	Rect	4.00	4.00	15	Cir	225.14	15	Cir	
27	Structure - (259)	Combination	224.01	Rect	4.00	4.00	15	Cir	221.15	15	Cir	
28	Structure - (221)	Combination	217.95	Rect	4.00	4.00	15	Cir	209.96	15	Cir	
29	Null Structure	Combination	0.00	Rect	4.00	4.00	15	Cir	258.32	15	Cir	
30	Structure - (274)	Combination	212.14	Rect	4.00	4.00	15	Cir	208.71	15	Cir	208.72
31	Structure - (297)	Combination	223.99	Rect	4.00	4.00	15	Cir	220.44	15	Cir	207.85
32	Structure - (256)	Combination	216.29	Rect	4.00	4.00	15	Cir	208.12	15	Cir	220.84
33	Structure - (298)	Combination	223.99	Rect	4.00	4.00	15	Cir	221.13	15	Cir	
Project File: Storm sewers.slm				Number of Structures: 33			Run Date: 6/26/2026					

Storm Sewer Tabulation

Station		Len	Drng Area		Rnoff coeff	Area x C		Tc		Rain (l)	Total flow	Cap full	Vel	Pipe		Invert Elev		HGL Elev		Grnd / Rim Elev		Line ID
Line	To Line	(ft)	Incr	Total	(ac)	Total	Inlet	Syst	(min)	(in/hr)	(cfs)	(cfs)	(ft/s)	Size	Slope	Dn	Up	Dn	Up	Dn	Up	(ft)
1	End	54.000	0.06	1.96	0.90	0.05	1.76	5.0	16.4	4.2	7.36	41.77	6.42	15	35.65	173.50	192.75	174.63	193.83	163.86	196.00	Pipe - (252)
2	1	77.066	0.06	1.90	0.90	0.05	1.71	5.0	16.2	4.2	7.18	7.97	6.39	15	1.30	192.75	193.75	193.83	194.82	196.00	211.20	Pipe - (244)
3	2	165.229	0.06	1.84	0.90	0.05	1.66	5.0	15.8	4.3	7.06	7.40	6.33	15	1.12	193.75	195.60	194.82	196.66	211.20	199.48	Pipe - (243)
4	3	17.082	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.32	8.63	1.25	15	1.52	195.60	195.86	196.66	196.08	199.48	199.11	Pipe - (247)
5	3	130.000	0.06	1.73	0.90	0.05	1.55	5.0	15.5	4.3	6.68	21.61	6.07	15	9.54	195.60	208.00	196.66	209.04	199.48	212.50	Pipe - (242)
6	5	16.000	0.06	0.29	0.90	0.05	0.26	5.0	11.6	4.9	1.28	7.62	2.27	15	1.19	208.09	208.28	209.04	208.73	212.50	212.50	Pipe - (234)
7	5	153.939	0.06	0.90	0.90	0.05	0.81	5.0	14.8	4.4	3.55	19.65	4.62	15	7.89	208.30	220.45	209.04	221.21	212.50	224.01	Pipe - (233)
8	7	73.112	0.06	0.78	0.90	0.05	0.70	5.0	14.4	4.5	3.11	11.77	3.89	15	2.83	220.35	222.42	221.21	223.13	224.01	227.05	Pipe - (266)
9	8	60.504	0.06	0.72	0.90	0.05	0.64	5.0	14.0	4.5	2.90	10.91	4.13	15	2.43	222.42	223.89	223.13	224.57	227.05	228.00	Pipe - (232)
10	9	70.095	0.06	0.60	0.90	0.05	0.54	5.0	13.6	4.6	2.47	10.93	3.79	15	2.44	223.89	225.60	224.57	226.23	228.00	231.24	Pipe - (265)
11	10	62.536	0.06	0.54	0.90	0.05	0.49	5.0	13.1	4.6	2.26	21.92	3.77	15	9.82	225.60	231.74	226.23	232.34	231.24	234.94	Pipe - (231)
12	11	114.419	0.06	0.42	0.90	0.05	0.38	5.0	12.1	4.8	1.82	19.07	3.80	15	7.43	231.84	240.34	232.34	240.88	234.94	243.75	Pipe - (230)
13	12	162.671	0.06	0.30	0.90	0.05	0.27	5.0	10.1	5.2	1.40	19.13	3.51	15	7.48	240.44	252.61	240.88	253.08	243.75	256.08	Pipe - (229)
14	13	52.417	0.06	0.18	0.90	0.05	0.16	5.0	9.0	5.4	0.88	17.76	2.50	15	6.45	252.61	255.99	253.08	256.36	256.08	260.48	Pipe - (264)
15	14	79.281	0.06	0.12	0.90	0.05	0.11	5.0	6.7	6.0	0.65	22.07	2.42	15	9.95	255.99	263.88	256.36	264.19	260.48	267.21	Pipe - (228)
16	15	29.485	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	7.17	2.40	15	1.05	263.98	264.29	264.19	264.52	267.21	267.15	Pipe - (227)
17	13	29.529	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	7.05	2.63	15	1.02	252.92	253.22	253.11	253.45	256.08	256.08	Pipe - (271)
18	5	35.027	0.06	0.48	0.90	0.05	0.43	5.0	15.1	4.3	1.88	7.09	4.27	15	1.03	209.18	209.54	209.62	210.09	212.50	216.11	Pipe - (276)
19	18	160.393	0.06	0.36	0.90	0.05	0.32	5.0	13.4	4.6	1.49	23.82	3.23	15	11.59	209.56	228.15	210.09	228.63	216.11	231.44	Pipe - (203)
20	19	146.532	0.06	0.24	0.90	0.05	0.22	5.0	11.2	5.0	1.07	21.82	3.23	15	9.72	228.25	242.50	228.63	242.91	231.44	245.95	Pipe - (202)
21	20	27.339	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	8.57	2.45	15	1.50	242.70	243.11	242.91	243.34	245.95	245.96	Pipe - (205)
22	20	153.479	0.06	0.12	0.90	0.05	0.11	5.0	6.7	6.0	0.65	21.78	5.29	15	9.70	242.89	257.77	243.04	258.08	245.95	0.00	Pipe - (201)
Project File: Storm sewers.stm											Number of lines: 33			Run Date: 6/26/2026								
NOTES: Intensity = 69.04 / (Inlet time + 11.60) ^ 0.84; Return period = Yrs. 10 ; c = cir e = ellip b = box																						

Storm Sewer Tabulation

Station		Len (ft)	Drng Area		Rnoff coeff (C)	Area x C		Tc		Rain (l) (in/hr)	Total flow (cfs)	Cap full (cfs)	Vel (ft/s)	Pipe		Invert Elev		HGL Elev		Grnd / Rim Elev		Line ID			
Line	To Line		Incr (ac)	Total (ac)		Incr	Total	Inlet (min)	Syst (min)					Size (in)	Slope (%)	Dn (ft)	Up (ft)	Dn (ft)	Up (ft)	Dn (ft)	Up (ft)				
23	12	29,438	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	11.60	1.35	15	2.75	240.08	240.89	240.88	241.12	243.75	243.74	Pipe - (270)			
24	11	29,319	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	6.96	1.58	15	0.99	231.89	232.18	232.34	232.41	234.94	235.03	Pipe - (269)			
25	19	27,356	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	8.67	1.53	15	1.54	228.14	228.56	228.63	228.79	231.44	231.41	Pipe - (206)			
26	9	29,553	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	6.93	2.61	15	0.98	224.85	225.14	225.04	225.37	228.00	228.00	Pipe - (268)			
27	7	29,556	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	6.93	1.76	15	0.98	220.86	209.64	221.21	221.38	224.01	224.01	Pipe - (238)			
28	18	32,611	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	6.93	1.58	15	0.98	209.64	209.96	210.09	210.19	216.11	217.95	Pipe - (275)			
29	22	29,000	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	8.71	2.39	15	1.55	257.87	258.32	258.08	258.55	0.00	0.00	Pipe - (200)			
30	6	46,000	0.06	0.23	0.90	0.05	0.21	5.0	10.9	5.0	1.04	7.00	2.75	15	1.00	208.25	208.71	208.73	209.11	212.50	212.14	Pipe - (235)			
31	30	125,000	0.06	0.11	0.90	0.05	0.10	5.0	6.9	5.9	0.59	21.42	2.20	15	9.38	208.72	220.44	209.11	220.74	212.14	223.99	Pipe - (272)			
32	30	30,000	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.35	6.64	0.31	15	0.90	207.85	208.12	209.11	209.11	212.14	216.29	Pipe - (236)			
33	31	29,252	0.06	0.06	0.90	0.05	0.05	5.0	5.0	6.5	0.32	7.00	2.56	15	1.00	220.84	221.13	221.02	221.35	223.99	223.99	Pipe - (267)			
Project File: Storm sewers.stm														Number of lines: 33				Run Date: 6/26/2026							
NOTES: Intensity = 69.04 / (inlet time + 11.60) ^ 0.84; Return period = Yrs. 10 ; c = cir e = ellip b = box																									

Inlet Report

Line No	Inlet ID	Q = CIA (cfs)	Q carry (cfs)	Q capt (cfs)	Q Byp (cfs)	Junc Type	Curb Inlet		Grate Inlet			Gutter								Inlet			Byp Line No
							Ht (in)	L (ft)	Area (sqft)	L (ft)	W (ft)	So (ft/ft)	W (ft)	Sw (ft/ft)	Sx (ft/ft)	n	Depth (ft)	Spread (ft)	Depth (ft)	Spread (ft)			
1	Structure - (277)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	Off	
2	Structure - (264)	0.32	0.00	0.32	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	2.99	0.00	0.01	0.0	Off	
3	Structure - (263)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	2	
4	Structure - (272)	0.32	0.00	0.32	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	2.99	0.00	0.01	0.0	Off	
5	Structure - (300)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	3	
6	Structure - (300)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	4	
7	Structure - (253)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	5	
8	Structure - (296)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	7	
9	Structure - (252)	0.32	0.00	0.32	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	2.99	0.00	0.01	0.0	Off	
10	Structure - (295)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	9	
11	Structure - (251)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	10	
12	Structure - (250)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	11	
13	Structure - (249)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	12	
14	Structure - (294)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	13	
15	Structure - (248)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	14	
16	Structure - (247)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	17	
17	Structure - (262)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	23	
18	Structure - (217)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	5	
19	Structure - (216)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	18	
20	Structure - (215)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	19	
21	Structure - (219)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	25	
22	Null Structure	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	20	
23	Structure - (269)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	24	
Project File: Storm sewers.stm										Number of lines: 33			Run Date: 6/26/2026										
NOTES: Inlet N-Values = 0.016; Intensity = 69.04 / (Inlet time + 11.60) ^ 0.84; Return period = 10 Yrs. ; * Indicates Known Q added.All curb inlets are throat.																							

Inlet Report

Line No	Inlet ID	Q = CIA (cfs)	Q carry (cfs)	Q capt (cfs)	Q Byp (cfs)	Junc Type	Curb inlet		Grate Inlet			Gutter								Inlet			Byp Line No
							Ht (in)	L (ft)	Area (sqft)	L (ft)	W (ft)	So (ft/ft)	W (ft)	Sw (ft/ft)	Sx (ft/ft)	n	Depth (ft)	Spread (ft)	Depth (ft)	Spread (ft)			
24	Structure - (261)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	26
25	Structure - (220)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	28
26	Structure - (260)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	27
27	Structure - (259)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	6
28	Structure - (221)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	5
29	Null Structure	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	21
30	Structure - (274)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	6
31	Structure - (297)	0.32	0.00	0.32	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	2.99	0.00	0.01	0.0	0.0	Off
32	Structure - (256)	0.35	0.00	0.35	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	3.09	0.00	0.01	0.0	0.0	6
33	Structure - (298)	0.32	0.00	0.32	0.00	Comb	5.0	3.00	0.00	2.33	1.35	0.100	4.00	0.020	0.020	0.015	0.06	2.99	0.00	0.01	0.0	0.0	Off
Project File: Storm sewers.stm							Number of lines: 33							Run Date: 6/26/2026									
NOTES: Inlet N-Values = 0.016; Intensity = 69.04 / (inlet time + 11.60) ^ 0.84; Return period = 10 Yrs. ; * Indicates Known Q added.All curb inlets are throat.																							

FL-DOT Report

Line No	To Line	Type of struc	n - Value	Len (ft)	Drainage Area			Time of conc (min)	Time of Flow in sect	Inten (l) (in/hr)	Total CA	Add Q	Inlet elev (ft)	Elev of HGL			Rise Span	HGL Pipe	ADD		Date: 6/26/2026							
					C1 = 0.2 C2 = 0.5 C3 = 0.9	Incre-ment (ac)	Sub-Total (ac)							Sum CA	Total Flow	Up (ft)			Down (ft)	Fall (ft)		Size (in)	Slope (%)	Vel (ft/s)	Cap (cfs)	Line description		
												Q (cfs)															Span	Full Flow
1	End	Comb	0.012	54.000	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	16.40	0.13	4.19	1.76	0.00 7.36	196.00	193.83 194.00 192.75	174.63 174.75 173.50	19.20 15 Cir	35.56 35.65	6.42 34.04	7.36 41.77	Pipe - (252)								
2	1	Comb	0.012	77.066	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	16.21	0.19	4.21	1.71	0.00 7.18	211.20	194.82 195.00 193.75	193.83 194.00 192.75	0.99 15 Cir	1.28 1.30	6.39 6.49	7.18 7.97	Pipe - (244)								
3	2	Comb	0.012	165.229	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	15.82	0.40	4.26	1.66	0.00 7.06	199.48	196.66 196.85 195.60	194.82 195.00 193.75	1.84 15 Cir	1.12 1.12	6.33 6.03	7.06 7.40	Pipe - (243)								
4	3	Comb	0.012	17.082	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	5.00	1.09	6.50	0.05	0.00 0.32	199.11	196.08 197.11 195.86	196.66 196.85 195.60	-0.58 15 Cir	-3.41 1.52	1.25 7.03	0.32 8.63	Pipe - (247)								
5	3	Comb	0.012	130.000	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	15.49	0.33	4.30	1.55	0.00 6.68	212.50	209.04 209.25 208.00	196.66 196.85 195.60	12.38 15 Cir	9.52 9.54	6.07 17.61	6.68 21.61	Pipe - (242)								
6	5	Comb	0.012	16.000	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	11.60	0.20	4.90	0.26	0.00 1.28	212.50	208.73 209.53 208.28	209.04 209.34 208.09	-0.31 15 Cir	-1.95 1.19	2.27 6.21	1.28 7.62	Pipe - (234)								
7	5	Comb	0.012	153.939	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	14.77	0.72	4.40	0.81	0.00 3.55	224.01	221.21 221.70 220.45	209.04 209.55 208.30	12.17 15 Cir	7.91 7.89	4.62 16.02	3.55 19.65	Pipe - (233)								
8	7	Comb	0.012	73.112	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	14.38	0.39	4.46	0.70	0.00 3.11	227.05	223.13 223.67 222.42	221.21 221.60 220.35	1.92 15 Cir	2.63 2.83	3.89 9.59	3.11 11.77	Pipe - (266)								
9	8	Comb	0.012	60.504	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	14.04	0.34	4.51	0.64	0.00 2.90	228.00	224.57 225.14 223.89	223.13 223.67 222.42	1.45 15 Cir	2.39 2.43	4.13 8.89	2.90 10.91	Pipe - (232)								
10	9	Comb	0.012	70.095	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00	13.57	0.47	4.58	0.54	0.00 2.47	231.24	226.23 226.85 225.60	224.57 225.14 223.89	1.65 15 Cir	2.36 2.44	3.79 8.90	2.47 10.93	Pipe - (265)								

NOTES: Intensity = 69.04 / (inlet time + 11.60) ^ 0.84 (in/hr) ; Time of flow in section is based on full flow.

Project File: Storm sewers.stm

FL-DOT Report

Line No	To Line	Type of struc	n - Value	Len (ft)	Drainage Area			Time of conc (min)	Time of Flow in sect (min)	Inten (l) (ins/hr)	Total CA	Add Q	Inlet elev	Elev of HGL			Rise Span	HGL Pipe	ADD		Date: 6/26/2026								
					C1 = 0.2 C2 = 0.5 C3 = 0.9									Elev of Crown					Full Flow	Frequency: 10 yrs									
					Incre-ment (ac)	Sub-Total (ac)	Sum CA							Elev of Invert								Span	Pipe	Vel (ft/s)	Cap (cfs)				
														Up (ft)	Down (ft)	Fall (ft)										Size (in)	Slope (%)	Vel (ft/s)	Cap (cfs)
11	10	Comb	0.012	62.536	0.00 0.00 0.00	0.00 0.00 0.00	13.12	0.45	4.65	0.49	0.00 2.26	234.94	232.34 232.99 231.74	226.23 226.85 225.60	6.11 6.14	15 15 Cir	9.77 9.82	3.77 17.86	2.26 21.92	Pipe - (231)									
12	11	Comb	0.012	114.419	0.00 0.00 0.00	0.00 0.00 0.00	12.08	1.04	4.82	0.38	0.00 1.82	243.75	240.88 241.59 240.34	232.34 233.09 231.84	8.54 8.50	15 15 Cir	7.46 7.43	3.80 15.54	1.82 19.07	Pipe - (230)									
13	12	Comb	0.012	162.671	0.00 0.00 0.00	0.00 0.00 0.00	10.10	1.98	5.19	0.27	0.00 1.40	256.08	253.08 253.86 252.61	240.88 241.69 240.44	12.20 12.17	15 15 Cir	7.50 7.48	3.51 15.59	1.40 19.13	Pipe - (229)									
14	13	Comb	0.012	52.417	0.00 0.00 0.00	0.00 0.00 0.00	9.05	1.05	5.41	0.16	0.00 0.88	260.48	256.36 257.24 255.99	253.08 253.86 252.61	3.28 3.38	15 15 Cir	6.26 6.45	2.50 14.48	0.88 17.76	Pipe - (264)									
15	14	Comb	0.012	79.281	0.00 0.00 0.00	0.00 0.00 0.00	6.72	2.33	5.98	0.11	0.00 0.65	267.21	264.19 265.13 263.88	256.36 257.24 255.99	7.84 7.89	15 15 Cir	9.88 9.95	2.42 17.98	0.65 22.07	Pipe - (228)									
16	15	Comb	0.012	29.485	0.00 0.00 0.00	0.00 0.00 0.00	5.00	1.72	6.50	0.05	0.00 0.35	267.15	264.52 265.54 264.29	264.19 265.23 263.98	0.33 0.31	15 15 Cir	1.11 1.05	2.40 5.85	0.35 7.17	Pipe - (227)									
17	13	Comb	0.012	29.529	0.00 0.00 0.00	0.00 0.00 0.00	5.00	1.72	6.50	0.05	0.00 0.35	256.08	253.45 254.47 253.22	253.11 254.17 252.92	0.34 0.30	15 15 Cir	1.15 1.02	2.63 5.75	0.35 7.05	Pipe - (271)									
18	5	Comb	0.012	35.027	0.00 0.00 0.00	0.00 0.00 0.00	15.15	0.29	4.35	0.43	0.00 1.88	216.11	210.09 210.79 209.54	209.62 210.43 209.18	0.47 0.36	15 15 Cir	1.33 1.03	4.27 5.78	1.88 7.09	Pipe - (276)									
19	18	Comb	0.012	160.393	0.00 0.00 0.00	0.00 0.00 0.00	13.45	1.70	4.60	0.32	0.00 1.49	231.44	228.63 229.40 228.15	210.09 210.81 209.56	18.55 18.59	15 15 Cir	11.56 11.59	3.23 19.41	1.49 23.82	Pipe - (203)									
20	19	Comb	0.012	146.532	0.00 0.00 0.00	0.00 0.00 0.00	11.20	2.24	4.98	0.22	0.00 1.07	245.95	242.91 243.75 242.50	228.63 229.50 228.25	14.27 14.25	15 15 Cir	9.74 9.72	3.23 17.78	1.07 21.82	Pipe - (202)									

NOTES: Intensity = 69.04 / (inlet time + 11.60) ^ 0.84 (in/hr) ; Time of flow in section is based on full flow.

Project File: Storm sewers.stm

FL-DOT Report

Line No	To Line	Type of struc	n - Value	Len (ft)	Drainage Area			Time of conc (min)	Time of Flow in sect (min)	Inten (l) (ins/hr)	Total CA	Add Q	Inlet elev	Elev of HGL			Rise Span	HGL Pipe	ADD		Date: 6/26/2026								
					C1 = 0.2 C2 = 0.5 C3 = 0.9	Incre-ment (ac)	Sub-Total (ac)							Sum CA	Elev of Crown	Full Flow			Proj: Storm sewers.stm										
																				Q (cfs)		Up (ft)	Down (ft)	Fall (ft)	Size (in)	Slope (%)	Vel (ft/s)	Cap (cfs)	Line description
					Q (cfs)	Up (ft)	Down (ft)					Fall (ft)	Size (in)	Slope (%)	Vel (ft/s)	Cap (cfs)	Line description												
21	20	Comb	0.012	27.339	0.00	0.00	0.00	5.00	1.59	6.50	0.05	0.00	245.96	243.34	242.91	0.43	15	1.58	2.45	0.35	Pipe - (205)								
					0.00	0.00	0.00				0.35			244.36	243.95		15	1.50	6.98	8.57									
					0.00	0.00	0.00							243.11	242.70	0.41	Cir												
22	20	Comb	0.012	153.479	0.00	0.00	0.00	6.69	4.51	5.99	0.11	0.00	0.00	258.08	243.04	15.05	15	9.80	5.29	0.65	Pipe - (201)								
					0.00	0.00	0.00					0.65		259.02	244.14		15	9.70	17.75	21.78									
					0.00	0.00	0.00							257.77	242.89	14.88	Cir												
23	12	Comb	0.012	29.438	0.00	0.00	0.00	5.00	1.72	6.50	0.05	0.00	243.74	241.12	240.88	0.24	15	0.83	1.35	0.35	Pipe - (270)								
					0.00	0.00	0.00					0.35		242.14	241.33		15	2.75	9.46	11.60									
					0.00	0.00	0.00							240.89	240.08	0.81	Cir												
24	11	Comb	0.012	29.319	0.00	0.00	0.00	5.00	1.71	6.50	0.05	0.00	235.03	232.41	232.34	0.07	15	0.24	1.58	0.35	Pipe - (269)								
					0.00	0.00	0.00					0.35		233.43	233.14		15	0.99	5.67	6.96									
					0.00	0.00	0.00							232.18	231.89	0.29	Cir												
25	19	Comb	0.012	27.356	0.00	0.00	0.00	5.00	1.59	6.50	0.05	0.00	231.41	228.79	228.63	0.16	15	0.57	1.53	0.35	Pipe - (206)								
					0.00	0.00	0.00					0.35		229.81	229.39		15	1.54	7.06	8.67									
					0.00	0.00	0.00							228.56	228.14	0.42	Cir												
26	9	Comb	0.012	29.553	0.00	0.00	0.00	5.00	1.72	6.50	0.05	0.00	228.00	225.37	225.04	0.33	15	1.11	2.61	0.35	Pipe - (268)								
					0.00	0.00	0.00					0.35		226.39	226.10		15	0.98	5.65	6.93									
					0.00	0.00	0.00							225.14	224.85	0.29	Cir												
27	7	Comb	0.012	29.556	0.00	0.00	0.00	5.00	1.72	6.50	0.05	0.00	224.01	221.38	221.21	0.17	15	0.58	1.76	0.35	Pipe - (238)								
					0.00	0.00	0.00					0.35		222.40	222.11		15	0.98	5.65	6.93									
					0.00	0.00	0.00							221.15	220.86	0.29	Cir												
28	18	Comb	0.012	32.611	0.00	0.00	0.00	5.00	1.90	6.50	0.05	0.00	217.95	210.19	210.09	0.10	15	0.32	1.58	0.35	Pipe - (275)								
					0.00	0.00	0.00					0.35		211.21	210.89		15	0.98	5.65	6.93									
					0.00	0.00	0.00							209.96	209.64	0.32	Cir												
29	22	Comb	0.012	29.000	0.00	0.00	0.00	5.00	1.69	6.50	0.05	0.00	0.00	258.55	258.08	0.47	15	1.61	2.39	0.35	Pipe - (200)								
					0.00	0.00	0.00					0.35		259.57	259.12		15	1.55	7.10	8.71									
					0.00	0.00	0.00							258.32	257.87	0.45	Cir												
30	6	Comb	0.012	46.000	0.00	0.00	0.00	10.87	0.73	5.04	0.21	0.00	212.14	209.11	208.73	0.39	15	0.84	2.75	1.04	Pipe - (235)								
					0.00	0.00	0.00					1.04		209.96	209.50		15	1.00	5.70	7.00									
					0.00	0.00	0.00							208.71	208.25	0.46	Cir												

NOTES: Intensity = 69.04 / (inlet time + 11.60) ^ 0.84 (in/hr) ; Time of flow in section is based on full flow.

Project File: Storm sewers.stm

FL-DOT Report

Line No	To Line	Type of struc	n - Value	Len (ft)	Drainage Area			Time of conc (min)	Time of Flow in sect (min)	Inten (I) (in/hr)	Total CA	Add		Inlet elev (ft)	Elev of HGL			Rise Span	HGL Pipe	ADD		Date: 6/26/2026				
					Incre-ment (ac)	Sub-Total (ac)	Sum CA					Q	Total Flow		Up (ft)	Down (ft)	Fall (ft)			Size (in)	Slope (%)		Vel (ft/s)	Cap (cfs)	Full Flow	Frequency: 10 yrs
														Q (cfs)	Size (in)	Slope (%)	Vel (ft/s)	Cap (cfs)	Line description							
31	30	Comb	0.012	125.000	0.00	0.00	0.00	6.86	4.01	5.94	0.10	0.00	223.99	220.74	209.11	11.63	15	9.30	2.20	0.59	Pipe - (272)					
					0.00	0.00	0.00					0.59		221.69	209.97		15	9.38	17.46	21.42						
					0.00	0.00	0.00							220.44	208.72	11.72	Cir									
32	30	Comb	0.012	30.000	0.00	0.00	0.00	5.00	1.75	6.50	0.05	0.00	216.29	209.11	209.11	0.00	15	0.00	0.31	0.35	Pipe - (236)					
					0.00	0.00	0.00					0.35		209.37	209.10		15	0.90	5.41	6.64						
					0.00	0.00	0.00							208.12	207.85	0.27	Cir									
33	31	Comb	0.012	29.252	0.00	0.00	0.00	5.00	1.86	6.50	0.05	0.00	223.99	221.35	221.02	0.33	15	1.13	2.56	0.32	Pipe - (267)					
					0.00	0.00	0.00					0.32		222.38	222.09		15	1.00	5.70	7.00						
					0.00	0.00	0.00							221.13	220.84	0.29	Cir									

NOTES: Intensity = 69.04 / (inlet time + 11.60) ^ 0.84 (in/hr) ; Time of flow in section is based on full flow.

Project File: Storm sewers.stm

Line No.	Area Dn (sqft)	Area Up (sqft)	Byp Ln No	Coeff C1	Coeff C2	Coeff C3	Capac Full (cfs)	Crit Depth (ft)	Cross SI, Sw (ft/ft)	Cross SI, Sx (ft/ft)	Curb Len (ft)	Defl Ang (Deg)	Depth Dn (ft)	Depth Up (ft)	DnStm Ln No	Drng Area (ac)	Easting X (ft)	EGL Dn (ft)	EGL Up (ft)	Energy Loss (ft)
1	1.13	1.13	Offsite	0.20	0.50	0.90	41.77	1.08	0.020	0.020	3.00	-97.078	1.13	1.08**	Outfall	0.06	904915.35	175.29	194.49	0.000
2	1.12	1.12	Offsite	0.20	0.50	0.90	7.97	1.07	0.020	0.020	3.00	-4.421	1.08	1.07**	1	0.06	904899.99	194.47	195.46	0.000
3	1.11	1.11	2	0.20	0.50	0.90	7.40	1.06	0.020	0.020	3.00	79.718	1.07	1.06**	2	0.06	905053.42	195.45	197.29	0.000
4	0.15	0.15	Offsite	0.20	0.50	0.90	8.63	0.22	0.020	0.020	3.00	116.686	1.06	0.22**	3	0.06	905051.96	196.74	196.16	0.000
5	1.09	1.09	3	0.20	0.50	0.90	21.61	1.04	0.020	0.020	3.00	29.000	1.06	1.04**	3	0.06	905182.39	197.25	209.62	0.000
6	0.39	0.39	4	0.20	0.50	0.90	7.62	0.45	0.020	0.020	3.00	90.000	0.95	0.45**	5	0.06	905180.38	209.20	208.89	0.000
7	0.75	0.78	5	0.20	0.50	0.90	19.65	0.76	0.020	0.020	3.00	0.000	0.74	0.76**	5	0.06	906335.11	209.36	221.53	0.000
8	0.72	0.72	7	0.20	0.50	0.90	11.77	0.71	0.020	0.020	3.00	-13.226	0.86	0.71**	7	0.06	905407.82	221.50	223.42	0.000
9	0.69	0.69	Offsite	0.20	0.50	0.90	10.91	0.68	0.020	0.020	3.00	-20.809	0.71	0.68**	8	0.06	905461.82	223.41	224.85	0.000
10	0.62	0.62	9	0.20	0.50	0.90	10.93	0.63	0.020	0.020	3.00	-20.376	0.68	0.63**	9	0.06	905509.45	224.82	226.48	0.000
11	0.58	0.58	10	0.20	0.50	0.90	21.92	0.60	0.020	0.020	3.00	-20.329	0.63	0.60**	10	0.06	905533.36	226.46	232.57	0.000
12	0.46	0.50	11	0.20	0.50	0.90	19.07	0.54	0.020	0.020	3.00	-9.356	0.50	0.54**	11	0.06	905559.34	232.54	241.08	0.000
13	0.38	0.42	12	0.20	0.50	0.90	19.13	0.47	0.020	0.020	3.00	-3.640	0.44	0.47**	12	0.06	905586.14	241.05	253.25	0.000
14	0.30	0.30	13	0.20	0.50	0.90	17.76	0.37	0.020	0.020	3.00	-23.773	0.47	0.37**	13	0.06	905573.20	253.21	256.49	0.000
15	0.24	0.24	14	0.20	0.50	0.90	22.07	0.31	0.020	0.020	3.00	-20.372	0.37	0.31**	14	0.06	905528.11	256.47	264.31	0.000
16	0.14	0.15	17	0.20	0.50	0.90	7.17	0.23	0.020	0.020	3.00	77.993	0.21	0.23**	15	0.06	905548.35	264.27	264.60	0.000
17	0.12	0.15	23	0.20	0.50	0.90	7.05	0.23	0.020	0.020	3.00	74.678	0.19	0.23**	13	0.06	905615.52	253.19	253.53	0.000
18	0.39	0.51	5	0.20	0.50	0.90	7.09	0.55	0.020	0.020	3.00	-44.029	0.44	0.55**	5	0.06	905210.43	209.83	210.29	0.000
19	0.44	0.44	18	0.20	0.50	0.90	23.82	0.48	0.020	0.020	3.00	-50.812	0.53	0.48**	18	0.06	905217.09	210.27	228.81	0.000
20	0.32	0.35	19	0.20	0.50	0.90	21.82	0.41	0.020	0.020	3.00	-0.428	0.38	0.41**	19	0.06	905222.08	228.78	243.06	0.000
21	0.13	0.15	25	0.20	0.50	0.90	8.57	0.23	0.020	0.020	3.00	89.968	0.21	0.23**	20	0.06	905249.40	242.99	243.42	0.000
22	0.08	0.24	20	0.20	0.50	0.90	21.78	0.31	0.020	0.020	3.00	3.119	0.15	0.31**	20	0.06	905235.64	243.15	258.20	0.000
23	0.15	0.15	24	0.20	0.50	0.90	11.60	0.23	0.020	0.020	3.00	90.226	0.80	0.23**	12	0.06	905587.98	240.96	241.20	0.000

Line No.	Area Dn (sqft)	Area Up (sqft)	Byp Ln No	Coeff C1	Coeff C2	Coeff C3	Capac Full (cfs)	Crit Depth (ft)	Cross SI, Sw (ft/ft)	Cross SI, Sx (ft/ft)	Curb Len (ft)	Defl Ang (Deg)	Depth Dn (ft)	Depth Up (ft)	DnStm Ln No	Drng Area (ac)	Easting X (ft)	EGL Dn (ft)	EGL Up (ft)	Energy Loss (ft)
24	0.15	0.15	26	0.20	0.50	0.90	6.96	0.23	0.020	0.020	3.00	79.689	0.45	0.23**	11	0.06	905562.02	232.42	232.49	0.000
25	0.15	0.15	28	0.20	0.50	0.90	8.67	0.23	0.020	0.020	3.00	89.612	0.49	0.23**	19	0.06	905244.43	228.71	228.87	0.000
26	0.12	0.15	27	0.20	0.50	0.90	6.93	0.23	0.020	0.020	3.00	80.138	0.19	0.23**	9	0.06	905479.47	225.12	225.45	0.000
27	0.15	0.15	6	0.20	0.50	0.90	6.93	0.23	0.020	0.020	3.00	87.270	0.35	0.23**	7	0.06	905332.80	221.29	221.46	0.000
28	0.15	0.15	5	0.20	0.50	0.90	6.93	0.23	0.020	0.020	3.00	36.535	0.45	0.23**	18	0.06	905243.04	210.17	210.27	0.000
29	0.14	0.15	21	0.20	0.50	0.90	8.71	0.23	0.020	0.020	3.00	90.000	0.21	0.23**	22	0.06	905264.52	258.16	258.63	0.000
30	0.34	0.34	6	0.20	0.50	0.90	7.00	0.40	0.020	0.020	3.00	-35.000	0.48	0.40**	6	0.06	905201.82	208.87	209.26	0.000
31	0.23	0.23	Offsite	0.20	0.50	0.90	21.42	0.30	0.020	0.020	3.00	30.000	0.39	0.30**	30	0.06	905196.98	209.22	220.84	0.000
32	1.23	1.04	6	0.20	0.50	0.90	6.64	0.23	0.020	0.020	3.00	-80.000	1.25	0.99	30	0.06	905230.39	209.11	209.11	0.001
33	0.11	0.15	Offsite	0.20	0.50	0.90	7.00	0.22	0.020	0.020	3.00	-90.144	0.18	0.22**	31	0.06	905226.21	221.10	221.42	0.000

Project File: Storm sewers.stm	Number of lines: 33	Date: 6/26/2026
--------------------------------	---------------------	-----------------

NOTES: ** Critical depth

Flow Rate	Sf Ave	Sf Dn	Grate Area	Grate Len	Grate Width	Gnd/Rim El Dn	Gnd/Rim El Up	Gutter Depth	Gutter Slope	Gutter Spread	Gutter Width	HGL Dn	HGL Up	HGL Jnct	HGL jmp Dn	HGL jmp Up	Incr CxA	Incr Q	Inlet Depth	Inlet Eff
(cfs)	(ft/ft)	(ft/ft)	(sqft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)		(cfs)	(ft)	(%)
7.36	0.000	0.000		2.33	1.35	163.86	196.00	0.06	0.100	3.09	4.00	174.63	193.83 j	193.83	176.51	177.92	0.05	0.35	0.06	100
7.18	0.000	0.000		2.33	1.35	196.00	211.20	0.06	0.100	2.99	4.00	193.83	194.82 j	194.82	193.92	193.90	0.05	0.32	0.06	100
7.06	0.000	0.000		2.33	1.35	211.20	199.48	0.06	0.100	3.09	4.00	194.82	196.66 j	196.66	195.00	194.98	0.05	0.35	0.06	100
0.32	0.000	0.000		2.33	1.35	199.48	199.11	0.06	0.100	2.99	4.00	196.66	196.08	196.08			0.05	0.32	0.06	100
6.68	0.000	0.000		2.33	1.35	199.48	212.50	0.06	0.100	3.09	4.00	196.66	209.04 j	209.04	197.88	197.95	0.05	0.35	0.06	100
1.28	0.000	0.000		2.33	1.35	212.50	212.50	0.06	0.100	3.09	4.00	209.04	208.73	208.73			0.05	0.35	0.06	100
3.55	0.000	0.000		2.33	1.35	212.50	224.01	0.06	0.100	3.09	4.00	209.04	221.21	221.21			0.05	0.35	0.06	100
3.11	0.000	0.000		2.33	1.35	224.01	227.05	0.06	0.100	3.09	4.00	221.21	223.13 j	223.13	221.27	221.19	0.05	0.35	0.06	100
2.90	0.000	0.000		2.33	1.35	227.05	228.00	0.06	0.100	2.99	4.00	223.13	224.57 j	224.57	223.25	223.18	0.05	0.32	0.06	100
2.47	0.000	0.000		2.33	1.35	228.00	231.24	0.06	0.100	3.09	4.00	224.57	226.23 j	226.23	224.69	224.62	0.05	0.35	0.06	100
2.26	0.000	0.000		2.33	1.35	231.24	234.94	0.06	0.100	3.09	4.00	226.23	232.34 j	232.34	226.81	226.86	0.05	0.35	0.06	100
1.82	0.000	0.000		2.33	1.35	234.94	243.75	0.06	0.100	3.09	4.00	232.34	240.88	240.88			0.05	0.35	0.06	100
1.40	0.000	0.000		2.33	1.35	243.75	256.08	0.06	0.100	3.09	4.00	240.88	253.08	253.08			0.05	0.35	0.06	100
0.88	0.000	0.000		2.33	1.35	256.08	260.48	0.06	0.100	3.09	4.00	253.08	256.36 j	256.36	253.31	253.29	0.05	0.35	0.06	100
0.65	0.000	0.000		2.33	1.35	260.48	267.21	0.06	0.100	3.09	4.00	256.36	264.19 j	264.19	257.09	257.10	0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	267.21	267.15	0.06	0.100	3.09	4.00	264.19	264.52	264.52			0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	256.08	256.08	0.06	0.100	3.09	4.00	253.11	253.45	253.45			0.05	0.35	0.06	100
1.88	0.000	0.000		2.33	1.35	212.50	216.11	0.06	0.100	3.09	4.00	209.62	210.09	210.09			0.05	0.35	0.06	100
1.49	0.000	0.000		2.33	1.35	216.11	231.44	0.06	0.100	3.09	4.00	210.09	228.63 j	228.63	211.90	211.92	0.05	0.35	0.06	100
1.07	0.000	0.000		2.33	1.35	231.44	245.95	0.06	0.100	3.09	4.00	228.63	242.91	242.91			0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	245.95	245.96	0.06	0.100	3.09	4.00	242.91	243.34	243.34			0.05	0.35	0.06	100
0.65	0.000	0.000		2.33	1.35	245.95	0.00	0.06	0.100	3.09	4.00	243.04	258.08	258.08			0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	243.75	243.74	0.06	0.100	3.09	4.00	240.88	241.12 j	241.12	240.86	240.69	0.05	0.35	0.06	100

Flow Rate	Sf Ave	Sf Dn	Grate Area	Grate Len	Grate Width	Gnd/Rim El Dn	Gnd/Rim El Up	Gutter Depth	Gutter Slope	Gutter Spread	Gutter Width	HGL Dn	HGL Up	HGL Jnct	HGL Jmp Dn	HGL Jmp Up	Incr CxA	Incr Q	Inlet Depth	Inlet Eff
(cfs)	(ft/ft)	(ft/ft)	(sqft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)		(cfs)	(ft)	(%)
0.35	0.000	0.000		2.33	1.35	234.94	235.03	0.06	0.100	3.09	4.00	232.34	232.41 j	232.41	232.32	232.24	0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	231.44	231.41	0.06	0.100	3.09	4.00	228.63	228.79 j	228.79	228.61	228.51	0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	228.00	228.00	0.06	0.100	3.09	4.00	225.04	225.37	225.37			0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	224.01	224.01	0.06	0.100	3.09	4.00	221.21	221.38 j	221.38	221.20	221.12	0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	216.11	217.95	0.06	0.100	3.09	4.00	210.09	210.19 j	210.19	210.07	209.97	0.05	0.35	0.06	100
0.35	0.000	0.000		2.33	1.35	0.00	0.00	0.06	0.100	3.09	4.00	258.08	258.55	258.55			0.05	0.35	0.06	100
1.04	0.000	0.000		2.33	1.35	212.50	212.14	0.06	0.100	3.09	4.00	208.73	209.11 j	209.11	208.70	208.66	0.05	0.35	0.06	100
0.59	0.000	0.000		2.33	1.35	212.14	223.99	0.06	0.100	2.99	4.00	209.11	220.74 j	220.74	210.19	210.18	0.05	0.32	0.06	100
0.35	0.003	0.003		2.33	1.35	212.14	216.29	0.06	0.100	3.09	4.00	209.11	209.11	209.11			0.05	0.35	0.06	100
0.32	0.000	0.000		2.33	1.35	223.99	223.99	0.06	0.100	2.99	4.00	221.02	221.35	221.35			0.05	0.32	0.06	100

Project File: Storm sewers.stm												Number of lines: 33					Date: 6/26/2026			
--------------------------------	--	--	--	--	--	--	--	--	--	--	--	---------------------	--	--	--	--	-----------------	--	--	--

NOTES: ** Critical depth																				
--------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Inlet ID	Inlet Loc	Inlet Time	i Sys	i Inlet	Invert Dn	Invert Up	Jump Loc	Jump Len	Vel Hd Jmp Dn	Vel Hd Jmp Up	J-Loss Coeff	Junct Type	Known Q	Cost RCP	Cost CMP	Cost PVC	Line ID
		(ft)	(min)	(in/hr)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)			(cfs)				
Structure - (277)	On Grade	5.0	4.19	6.50	173.50	192.75	5.40	5.40	0.66	2.90	0.50 z	Comb.	0.00	1,720	1,548	1,462	Pipe - (252)
Structure - (264)	On Grade	5.0	4.21	6.50	192.75	193.75	7.71	5.36	0.64	0.74	1.48 z	Comb.	0.00	3,913	3,521	3,326	Pipe - (244)
Structure - (263)	On Grade	5.0	4.26	6.50	193.75	195.60	16.52	5.33	0.62	0.72	1.82 z	Comb.	0.00	8,218	7,396	6,985	Pipe - (243)
Structure - (272)	On Grade	5.0	6.50	6.50	195.60	195.86			0.00	0.00	1.00 z	Comb.	0.00	610	549	519	Pipe - (247)
Structure - (300)	On Grade	5.0	4.30	6.50	195.60	208.00	13.00	5.19	0.58	1.95	1.66 z	Comb.	0.00	4,545	4,091	3,863	Pipe - (242)
Structure - (300)	On Grade	5.0	4.90	6.50	208.09	208.28			0.00	0.00	0.94 z	Comb.	0.00	680	612	578	Pipe - (234)
Structure - (253)	On Grade	5.0	4.40	6.50	208.30	220.45			0.00	0.00	1.50 z	Comb.	0.00	4,945	4,451	4,203	Pipe - (233)
Structure - (296)	On Grade	5.0	4.46	6.50	220.35	222.42	7.31	3.55	0.29	0.61	0.61 z	Comb.	0.00	2,548	2,293	2,165	Pipe - (266)
Structure - (252)	On Grade	5.0	4.51	6.50	222.42	223.89	6.05	3.42	0.28	0.52	1.48 z	Comb.	0.00	2,238	2,014	1,902	Pipe - (232)
Structure - (295)	On Grade	5.0	4.58	6.50	223.89	225.60	7.01	3.14	0.25	0.51	0.60 z	Comb.	0.00	2,570	2,313	2,185	Pipe - (265)
Structure - (251)	On Grade	5.0	4.65	6.50	225.60	231.74	6.25	3.00	0.23	0.98	1.48 z	Comb.	0.00	2,185	1,967	1,857	Pipe - (231)
Structure - (250)	On Grade	5.0	4.82	6.50	231.84	240.34			0.00	0.00	1.50 z	Comb.	0.00	3,520	3,168	2,992	Pipe - (230)
Structure - (249)	On Grade	5.0	5.19	6.50	240.44	252.61			0.00	0.00	1.46 z	Comb.	0.00	4,975	4,478	4,229	Pipe - (229)
Structure - (294)	On Grade	5.0	5.41	6.50	252.61	255.99	5.24	1.83	0.13	0.52	0.60 z	Comb.	0.00	1,805	1,625	1,534	Pipe - (264)
Structure - (248)	On Grade	5.0	5.98	6.50	255.99	263.88	7.93	1.57	0.11	0.75	1.47 z	Comb.	0.00	2,635	2,372	2,240	Pipe - (228)
Structure - (247)	On Grade	5.0	6.50	6.50	263.98	264.29			0.00	0.00	1.00 z	Comb.	0.00	970	873	825	Pipe - (227)
Structure - (262)	On Grade	5.0	6.50	6.50	252.92	253.22			0.00	0.00	1.00 z	Comb.	0.00	985	887	837	Pipe - (271)
Structure - (217)	On Grade	5.0	4.35	6.50	209.18	209.54			0.00	0.00	1.46 z	Comb.	0.00	1,353	1,217	1,150	Pipe - (276)
Structure - (216)	On Grade	5.0	4.60	6.50	209.56	228.15	16.04	2.41	0.18	1.54	1.50 z	Comb.	0.00	5,660	5,094	4,811	Pipe - (203)
Structure - (215)	On Grade	5.0	4.98	6.50	228.25	242.50			0.00	0.00	1.75 z	Comb.	0.00	4,495	4,046	3,821	Pipe - (202)
Structure - (219)	On Grade	5.0	6.50	6.50	242.70	243.11			0.00	0.00	1.00 z	Comb.	0.00	910	819	774	Pipe - (205)
Null Structure	On Grade	5.0	5.99	6.50	242.89	257.77			0.00	0.00	1.50 z	Comb.	0.00	4,690	4,221	3,987	Pipe - (201)
Structure - (269)	On Grade	5.0	6.50	6.50	240.08	240.89	14.72	1.89	0.02	0.27	1.00 z	Comb.	0.00	970	873	825	Pipe - (270)

Project File: Storm sewers.stm

Number of lines: 33

Date: 6/26/2026

NOTES: Intensity = 69.04 / (inlet time + 11.60) ^ 0.84 -- Return period = 10 Yrs. ; ** Critical depth

Inlet ID	Inlet Loc	(ft)	Inlet Time (min)	i Sys (in/hr)	i Inlet (in/hr)	Invert Dn (ft)	Invert Up (ft)	Jump Loc (ft)	Jump Len (ft)	Vel Hd Jmp Dn (ft)	Vel Hd Jmp Up (ft)	J-Loss Coeff	Junct Type	Known Q (cfs)	Cost RCP	Cost CMP	Cost PVC	Line ID
Structure - (261)	On Grade		5.0	6.50	6.50	231.89	232.18	14.66	1.42	0.04	0.13	1.00 z	Comb.	0.00	970	873	825	Pipe - (269)
Structure - (220)	On Grade		5.0	6.50	6.50	228.14	228.56	10.94	1.53	0.04	0.18	1.00 z	Comb.	0.00	910	819	774	Pipe - (206)
Structure - (260)	On Grade		5.0	6.50	6.50	224.85	225.14	...	...	0.00	0.00	1.00 z	Comb.	0.00	985	887	837	Pipe - (268)
Structure - (259)	On Grade		5.0	6.50	6.50	220.86	221.15	5.91	1.39	0.05	0.13	1.00 z	Comb.	0.00	985	887	837	Pipe - (238)
Structure - (221)	On Grade		5.0	6.50	6.50	209.64	209.96	13.04	1.50	0.04	0.13	1.00 z	Comb.	0.00	1,430	1,287	1,216	Pipe - (275)
Null Structure	On Grade		5.0	6.50	6.50	257.87	258.32	...	...	0.00	0.00	1.00 z	Comb.	0.00	970	873	825	Pipe - (200)
Structure - (274)	On Grade		5.0	5.04	6.50	208.25	208.71	4.60	2.02	0.14	0.22	1.48 z	Comb.	0.00	1,550	1,395	1,318	Pipe - (235)
Structure - (297)	On Grade		5.0	5.94	6.50	208.72	220.44	12.50	1.49	0.11	0.85	1.50 z	Comb.	0.00	3,850	3,465	3,273	Pipe - (272)
Structure - (256)	On Grade		5.0	6.50	6.50	207.85	208.12	...	...	0.00	0.00	1.00	Comb.	0.00	1,283	1,154	1,090	Pipe - (236)
Structure - (298)	On Grade		5.0	6.50	6.50	220.84	221.13	...	...	0.00	0.00	1.00 z	Comb.	0.00	970	873	825	Pipe - (267)
Project File: Storm sewers.stm														Number of lines: 33		Date: 6/26/2026		
NOTES: Intensity = 69.04 / (inlet time + 11.60) ^ 0.84 -- Return period = 10 Yrs. ; ** Critical depth																		

Line Length	Line Size	Line Slope	Line Type	Local Depr	n-val Gutter	n-val Pipe	Minor Loss	Northing Y	Pipe Travel	Q Byp	Q Capt	Q Carry	Line Rise	Runoff Coeff	Line Span	Area A1	Area A2	Area A3	Tc	Throat Ht	Total Area	Total CxA
(ft)	(in)	(%)		(in)			(ft)	(ft)	(min)	(cfs)	(cfs)	(cfs)	(in)	(C)	(in)	(ac)	(ac)	(ac)	(min)	(in)	(ac)	
54.000	15	35.65	Cir	0.0	0.015	0.012	n/a	681979.98	0.13	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	16.4	5.0	1.96	1.76
77.066	15	1.30	Cir	0.0	0.015	0.012	n/a	682055.50	0.19	0.00	0.32	0.00	15	0.90	15	0.00	0.00	0.00	16.2	5.0	1.90	1.71
165.229	15	1.12	Cir	0.0	0.015	0.012	n/a	682116.81	0.40	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	15.8	5.0	1.84	1.66
17.082	15	1.52	Cir	0.0	0.015	0.012	n/a	682099.79	1.09	0.00	0.32	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
130.000	15	9.54	Cir	0.0	0.015	0.012	n/a	682100.47	0.33	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	15.5	5.0	1.73	1.55
16.000	15	1.19	Cir	0.0	0.015	0.012	0.15	682084.60	0.20	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	11.6	5.0	0.29	0.26
153.939	15	7.89	Cir	0.0	0.015	0.012	n/a	682081.13	0.72	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	14.8	5.0	0.90	0.81
73.112	15	2.83	Cir	0.0	0.015	0.012	n/a	682088.78	0.39	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	14.4	5.0	0.78	0.70
60.504	15	2.43	Cir	0.0	0.015	0.012	n/a	682116.08	0.34	0.00	0.32	0.00	15	0.90	15	0.00	0.00	0.00	14.0	5.0	0.72	0.64
70.095	15	2.44	Cir	0.0	0.015	0.012	n/a	682167.50	0.47	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	13.6	5.0	0.60	0.54
62.536	15	9.82	Cir	0.0	0.015	0.012	n/a	682225.28	0.45	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	13.1	5.0	0.54	0.49
114.419	15	7.43	Cir	0.0	0.015	0.012	n/a	682336.71	1.04	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	12.1	5.0	0.42	0.38
162.671	15	7.48	Cir	0.0	0.015	0.012	0.25	682497.16	1.98	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	10.1	5.0	0.30	0.27
52.417	15	6.45	Cir	0.0	0.015	0.012	n/a	682547.96	1.05	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	9.0	5.0	0.18	0.16
79.281	15	9.95	Cir	0.0	0.015	0.012	n/a	682613.17	2.33	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	6.7	5.0	0.12	0.11
29.485	15	1.05	Cir	0.0	0.015	0.012	n/a	682634.62	1.72	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
29.529	15	1.02	Cir	0.0	0.015	0.012	0.08	682500.17	1.72	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
35.027	15	1.03	Cir	0.0	0.015	0.012	0.30	682121.46	0.29	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	15.1	5.0	0.48	0.43
160.393	15	11.59	Cir	0.0	0.015	0.012	n/a	682281.72	1.70	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	13.4	5.0	0.36	0.32
146.532	15	9.72	Cir	0.0	0.015	0.012	n/a	682428.16	2.24	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	11.2	5.0	0.24	0.22
27.339	15	1.50	Cir	0.0	0.015	0.012	0.08	682427.25	1.59	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
153.479	15	9.70	Cir	0.0	0.015	0.012	n/a	682581.04	4.51	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	6.7	5.0	0.12	0.11
29.438	15	2.75	Cir	0.0	0.015	0.012	n/a	682329.92	1.72	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05

Project File: Storm sewers.stm										Number of lines: 33										Date: 6/26/2026	
--------------------------------	--	--	--	--	--	--	--	--	--	---------------------	--	--	--	--	--	--	--	--	--	-----------------	--

NOTES: ** Critical depth																					
--------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Line Length (ft)	Line Size (in)	Line Slope (%)	Line Type	Local Depr (in)	n-val Gutter	n-val Pipe	Minor Loss (ft)	Northing Y (ft)	Pipe Travel (min)	Q Byp (cfs)	Q Capt (cfs)	Q Carry (cfs)	Line Rise (in)	Runoff Coeff (C)	Line Span (in)	Area A1 (ac)	Area A2 (ac)	Area A3 (ac)	Tc (min)	Throat Ht (in)	Total Area (ac)	Total CxA
29.319	15	0.99	Cir	0.0	0.015	0.012	n/a	682219.10	1.71	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
27.356	15	1.54	Cir	0.0	0.015	0.012	n/a	682280.77	1.59	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
29.553	15	0.98	Cir	0.0	0.015	0.012	0.08	682092.37	1.72	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
29.556	15	0.98	Cir	0.0	0.015	0.012	n/a	682051.66	1.72	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
32.611	15	0.98	Cir	0.0	0.015	0.012	n/a	682121.62	1.90	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
29.000	15	1.55	Cir	0.0	0.015	0.012	n/a	682578.48	1.69	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
46.000	15	1.00	Cir	0.0	0.015	0.012	n/a	682043.90	0.73	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	10.9	5.0	0.23	0.21
125.000	15	9.38	Cir	0.0	0.015	0.012	n/a	681919.00	4.01	0.00	0.32	0.00	15	0.90	15	0.00	0.00	0.00	6.9	5.0	0.11	0.10
30.000	15	0.90	Cir	0.0	0.015	0.012	0.00	682053.06	1.75	0.00	0.35	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
29.252	15	1.00	Cir	0.0	0.015	0.012	n/a	681917.94	1.86	0.00	0.32	0.00	15	0.90	15	0.00	0.00	0.00	5.0	5.0	0.06	0.05
Project File: Storm sewers.stm										Number of lines: 33			Date: 6/26/2026									
NOTES: ** Critical depth																						

Total Runoff	Vel Ave	Vel Dn	Vel Hd Dn	Vel Hd Up	Vel Up	Cover Dn	Cover Up	Storage	
(cfs)	(ft/s)	(ft/s)	(ft)	(ft)	(ft/s)	(ft)	(ft)	(cft)	
7.36	6.42	6.31	0.66	0.66	6.53	-10.89	2.00	61.99	
7.18	6.39	6.36	0.64	0.64	6.42	2.00	16.20	86.56	
7.06	6.33	6.31	0.63	0.63	6.34	16.20	2.63	184.27	
0.32	1.25	0.29	0.08	0.08	2.22	2.63	2.00	10.80	
6.68	6.07	6.01	0.58	0.58	6.13	2.63	3.25	143.13	
1.28	2.27	1.28	0.16	0.16	3.26	3.16	2.97	11.22	
3.55	4.62	4.70	0.32	0.32	4.54	2.95	2.31	118.15	
3.11	3.89	3.46	0.29	0.29	4.33	2.41	3.38	59.22	
2.90	4.13	4.03	0.28	0.28	4.22	3.38	2.86	42.53	
2.47	3.79	3.59	0.25	0.25	4.00	2.86	4.39	45.79	
2.26	3.77	3.65	0.23	0.23	3.88	4.39	1.95	37.54	
1.82	3.80	3.98	0.20	0.20	3.62	1.85	2.16	54.97	
1.40	3.51	3.68	0.17	0.17	3.34	2.06	2.22	65.04	
0.88	2.50	2.09	0.13	0.13	2.92	2.22	3.24	18.81	
0.65	2.42	2.15	0.11	0.11	2.68	3.24	2.08	21.44	
0.35	2.40	2.52	0.08	0.08	2.27	1.98	1.61	4.33	
0.35	2.63	2.99	0.08	0.08	2.27	1.91	1.61	4.01	
1.88	4.27	4.88	0.21	0.21	3.66	2.07	5.32	15.73	
1.49	3.23	3.05	0.18	0.18	3.41	5.30	2.04	74.28	
1.07	3.23	3.37	0.15	0.15	3.09	1.94	2.20	48.77	
0.35	2.45	2.62	0.08	0.08	2.27	2.00	1.60	3.94	
0.65	5.29	7.91	0.11	0.11	2.68	1.81	n/a	24.21	
0.35	1.35	0.43	0.08	0.08	2.27	2.42	1.60	14.11	
Project File: Storm sewers.stm									Number of lines: 33
Date: 6/26/2026									
NOTES: ** Critical depth									

Total Runoff	Vel Ave	Vel Dn	Vel Hd Dn	Vel Hd Up	Vel Up	Cover Dn	Cover Up	Storage	
(cfs)	(ft/s)	(ft/s)	(ft)	(ft)	(ft/s)	(ft)	(ft)	(cft)	
0.35	1.58	0.88	0.08	0.08	2.27	1.80	1.60	7.97	
0.35	1.53	0.78	0.08	0.08	2.27	2.05	1.60	8.11	
0.35	2.61	2.95	0.08	0.08	2.27	1.90	1.61	4.03	
0.35	1.76	1.25	0.08	0.08	2.27	1.90	1.61	6.38	
0.35	1.58	0.90	0.08	0.08	2.27	5.22	6.74	8.77	
0.35	2.39	2.51	0.08	0.08	2.27	n/a	n/a	4.26	
1.04	2.75	2.43	0.15	0.15	3.07	3.00	2.18	17.68	
0.59	2.20	1.79	0.11	0.11	2.61	2.17	2.30	34.51	
0.35	0.31	0.29	0.00	0.00	0.34	3.04	6.92	34.63	
0.32	2.56	2.89	0.08	0.08	2.22	1.90	1.61	3.74	
Project File: Storm sewers.stm									Number of lines: 33
Date: 6/26/2026									
NOTES: ** Critical depth									

Hydraulic Grade Line Computations

Line	Size (in) (2)	Q (cfs) (3)	Downstream						Len (ft) (12)	Upstream						Check		JL coeff (K) (23)	Minor loss (ft) (24)				
			Invert elev (ft) (4)	HGL elev (ft) (5)	Depth (ft) (6)	Area (sqft) (7)	Vel (ft/s) (8)	Vel head (ft) (9)		EGL elev (ft) (10)	Sf (%) (11)	Invert elev (ft) (13)	HGL elev (ft) (14)	Depth (ft) (15)	Area (sqft) (16)	Vel (ft/s) (17)	Vel head (ft) (18)			EGL elev (ft) (19)	Sf (%) (20)	Ave Sf (%) (21)	Energy loss (ft) (22)
1	15	7.36	173.50	174.63	1.13	1.13	6.31	0.66	175.29	0.000	54.000	192.75	193.83 j	1.08**	1.13	6.53	0.66	194.49	0.000	0.000	n/a	0.50	n/a
2	15	7.18	192.75	193.83	1.08	1.12	6.36	0.64	194.47	0.000	77.066	193.75	194.82 j	1.07**	1.12	6.42	0.64	195.46	0.000	0.000	n/a	1.48	0.95
3	15	7.06	193.75	194.82	1.07	1.11	6.31	0.63	195.45	0.000	165.229	195.60	196.66 j	1.06**	1.11	6.34	0.63	197.29	0.000	0.000	n/a	1.82	n/a
4	15	0.32	195.60	196.66	1.06	0.15	0.29	0.08	196.74	0.000	17.082	195.86	196.08	0.22**	0.15	2.22	0.08	196.16	0.000	0.000	n/a	1.00	n/a
5	15	6.68	195.60	196.66	1.06	1.09	6.01	0.58	197.25	0.000	130.009	208.00	209.04 j	1.04**	1.09	6.13	0.58	209.62	0.000	0.000	n/a	1.66	0.97
6	15	1.28	208.09	209.04	0.95	0.39	1.28	0.16	209.20	0.000	16.000	208.28	208.73	0.45**	0.39	3.26	0.16	208.89	0.000	0.000	n/a	0.94	0.15
7	15	3.55	208.30	209.04	0.74	0.75	4.70	0.32	209.36	0.000	153.939	220.45	221.21	0.76**	0.78	4.54	0.32	221.53	0.000	0.000	n/a	1.50	n/a
8	15	3.11	220.35	221.21	0.86	0.72	3.46	0.29	221.50	0.000	73.112	222.42	223.13 j	0.71**	0.72	4.33	0.29	223.42	0.000	0.000	n/a	0.61	0.18
9	15	2.90	222.42	223.13	0.71	0.69	4.03	0.28	223.41	0.000	60.504	223.89	224.57 j	0.68**	0.69	4.22	0.28	224.85	0.000	0.000	n/a	1.48	0.41
10	15	2.47	223.89	224.57	0.68	0.62	3.59	0.25	224.82	0.000	70.095	225.60	226.23 j	0.63**	0.62	4.00	0.25	226.48	0.000	0.000	n/a	0.60	n/a
11	15	2.26	225.60	226.23	0.63	0.58	3.65	0.23	226.46	0.000	62.536	231.74	232.34 j	0.60**	0.58	3.88	0.23	232.57	0.000	0.000	n/a	1.48	n/a
12	15	1.82	231.84	232.34	0.50	0.46	3.98	0.20	232.54	0.000	114.419	240.34	240.88	0.54**	0.50	3.62	0.20	241.08	0.000	0.000	n/a	1.50	n/a
13	15	1.40	240.44	240.88	0.44	0.38	3.68	0.17	241.05	0.000	162.671	252.61	253.08	0.47**	0.42	3.34	0.17	253.25	0.000	0.000	n/a	1.46	0.25
14	15	0.88	252.61	253.08	0.47	0.30	2.09	0.13	253.21	0.000	52.417	255.99	256.36 j	0.37**	0.30	2.92	0.13	256.49	0.000	0.000	n/a	0.60	n/a
15	15	0.65	255.99	256.36	0.37	0.24	2.15	0.11	256.47	0.000	79.281	263.88	264.19 j	0.31**	0.24	2.68	0.11	264.31	0.000	0.000	n/a	1.47	n/a
16	15	0.35	263.98	264.19	0.21	0.14	2.52	0.08	264.27	0.000	29.485	264.29	264.52	0.23**	0.15	2.27	0.08	264.60	0.000	0.000	n/a	1.00	n/a
17	15	0.35	252.92	253.11	0.19*	0.12	2.99	0.08	253.19	0.000	29.529	253.22	253.45	0.23**	0.15	2.27	0.08	253.53	0.000	0.000	n/a	1.00	0.08
18	15	1.88	209.18	209.62	0.44*	0.39	4.88	0.21	209.83	0.000	35.027	209.54	210.09	0.55**	0.51	3.66	0.21	210.29	0.000	0.000	n/a	1.46	0.30
19	15	1.49	209.56	210.09	0.53	0.44	3.05	0.18	210.27	0.000	160.399	228.15	228.63 j	0.48**	0.44	3.41	0.18	228.81	0.000	0.000	n/a	1.50	0.27
20	15	1.07	228.25	228.63	0.38	0.32	3.37	0.15	228.78	0.000	146.532	242.50	242.91	0.41**	0.35	3.09	0.15	243.06	0.000	0.000	n/a	1.75	n/a
21	15	0.35	242.70	242.91	0.21	0.13	2.62	0.08	242.99	0.000	27.339	243.11	243.34	0.23**	0.15	2.27	0.08	243.42	0.000	0.000	n/a	1.00	0.08
Project File: Storm sewers.stm										Number of lines: 33						Run Date: 6/26/2026							
Notes: * depth assumed. ** Critical depth.; j-Line contains hyd. jump ; c = cir e = ellip b = box																							

Hydraulic Grade Line Computations

Line	Size (in) (2) (1)	Q (cfs) (3)	Downstream								Len (ft) (12)	Upstream								Check		JL coeff (K) (23)	Minor loss (ft) (24)
			Invert elev (ft) (4)	HGL elev (ft) (5)	Depth (ft) (6)	Area (sqft) (7)	Vel (ft/s) (8)	Vel head (ft) (9)	EGL elev (ft) (10)	Sf (%) (11)		Invert elev (ft) (13)	HGL elev (ft) (14)	Depth (ft) (15)	Area (sqft) (16)	Vel (ft/s) (17)	Vel head (ft) (18)	EGL elev (ft) (19)	Sf (%) (20)	Ave Sf (%) (21)	Enrgy loss (ft) (22)		
22	15	0.65	242.89	243.04	0.15*	0.08	7.91	0.11	243.15	0.000	153.47	257.77	258.08	0.31**	0.24	2.68	0.11	258.20	0.000	0.000	n/a	1.50	n/a
23	15	0.35	240.08	240.88	0.80	0.15	0.43	0.08	240.96	0.000	29.438	240.89	241.12 j	0.23**	0.15	2.27	0.08	241.20	0.000	0.000	n/a	1.00	0.08
24	15	0.35	231.89	232.34	0.45	0.15	0.88	0.08	232.42	0.000	29.319	232.18	232.41 j	0.23**	0.15	2.27	0.08	232.49	0.000	0.000	n/a	1.00	0.08
25	15	0.35	228.14	228.63	0.49	0.15	0.78	0.08	228.71	0.000	27.356	228.56	228.79 j	0.23**	0.15	2.27	0.08	228.87	0.000	0.000	n/a	1.00	0.08
26	15	0.35	224.85	225.04	0.19*	0.12	2.95	0.08	225.12	0.000	29.553	225.14	225.37	0.23**	0.15	2.27	0.08	225.45	0.000	0.000	n/a	1.00	0.08
27	15	0.35	220.86	221.21	0.35	0.15	1.25	0.08	221.29	0.000	29.556	221.15	221.38 j	0.23**	0.15	2.27	0.08	221.46	0.000	0.000	n/a	1.00	0.08
28	15	0.35	209.64	210.09	0.45	0.15	0.90	0.08	210.17	0.000	32.611	209.96	210.19 j	0.23**	0.15	2.27	0.08	210.27	0.000	0.000	n/a	1.00	0.08
29	15	0.35	257.87	258.08	0.21	0.14	2.51	0.08	258.16	0.000	29.000	258.32	258.55	0.23**	0.15	2.27	0.08	258.63	0.000	0.000	n/a	1.00	n/a
30	15	1.04	208.25	208.73	0.48	0.34	2.43	0.15	208.87	0.000	46.000	208.71	209.11 j	0.40**	0.34	3.07	0.15	209.26	0.000	0.000	n/a	1.48	0.22
31	15	0.59	208.72	209.11	0.39	0.23	1.79	0.11	209.22	0.000	125.000	220.44	220.74 j	0.30**	0.23	2.61	0.11	220.84	0.000	0.000	n/a	1.50	n/a
32	15	0.35	207.85	209.11	1.25	1.23	0.29	0.00	209.11	0.003	30.000	208.12	209.11	0.99	1.04	0.34	0.00	209.11	0.003	0.003	0.001	1.00	0.00
33	15	0.32	220.84	221.02	0.18*	0.11	2.89	0.08	221.10	0.000	29.252	221.13	221.35	0.22**	0.15	2.22	0.08	221.42	0.000	0.000	n/a	1.00	n/a
Project File: Storm sewers.stm										Number of lines: 33									Run Date: 6/26/2026				
Notes: * depth assumed: ** Critical depth. ; j-Line contains hyd. jump ; c = cir e = ellip b = box																							

General Procedure:

Hydraflow computes the HGL using the Bernoulli energy equation. Manning's equation is used to determine energy losses due to pipe friction. In a standard step, iterative procedure, Hydraflow assumes upstream HGLs until the energy equation balances. If the energy equation cannot balance, supercritical flow exists and critical depth is temporarily assumed at the upstream end. A supercritical flow Profile is then computed using the same procedure in a downstream direction using momentum principles.

- Col. 1 The line number being computed. Calculations begin at Line 1 and proceed upstream.
- Col. 2 The line size. In the case of non-circular pipes, the line rise is printed above the span.
- Col. 3 Total flow rate in the line.
- Col. 4 The elevation of the downstream invert.
- Col. 5 Elevation of the hydraulic grade line at the downstream end. This is computed as the upstream HGL + Minor loss of this line's downstream line.
- Col. 6 The downstream depth of flow inside the pipe (HGL - Invert elevation) but not greater than the line size.
- Col. 7 Cross-sectional area of the flow at the downstream end.
- Col. 8 The velocity of the flow at the downstream end, (Col. 3 / Col. 7).
- Col. 9 Velocity head (Velocity squared / 2g).
- Col. 10 The elevation of the energy grade line at the downstream end, HGL + Velocity head, (Col. 5 + Col. 9).
- Col. 11 The friction slope at the downstream end (the S or Slope term in Manning's equation).
- Col. 12 The line length.
- Col. 13 The elevation of the upstream invert.
- Col. 14 Elevation of the hydraulic grade line at the upstream end.
- Col. 15 The upstream depth of flow inside the pipe (HGL - Invert elevation) but not greater than the line size.
- Col. 16 Cross-sectional area of the flow at the upstream end.
- Col. 17 The velocity of the flow at the upstream end, (Col. 3 / Col. 16).
- Col. 18 Velocity head (Velocity squared / 2g).
- Col. 19 The elevation of the energy grade line at the upstream end, HGL + Velocity head, (Col. 14 + Col. 18) .
- Col. 20 The friction slope at the upstream end (the S or Slope term in Manning's equation).
- Col. 21 The average of the downstream and upstream friction slopes.
- Col. 22 Energy loss. Average $Sf/100 \times \text{Line Length}$ (Col. 21/100 x Col. 12). Equals (EGL upstream - EGL downstream) +/- tolerance.
- Col. 23 The junction loss coefficient (K).
- Col. 24 Minor loss. (Col. 23 x Col. 18). Is added to upstream HGL and used as the starting HGL for the next upstream line(s).